



THIS DOCUMENT AND THE DATA DISCLOSED
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,
USED, OR DISCLOSED IN WHOLE OR IN PART
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

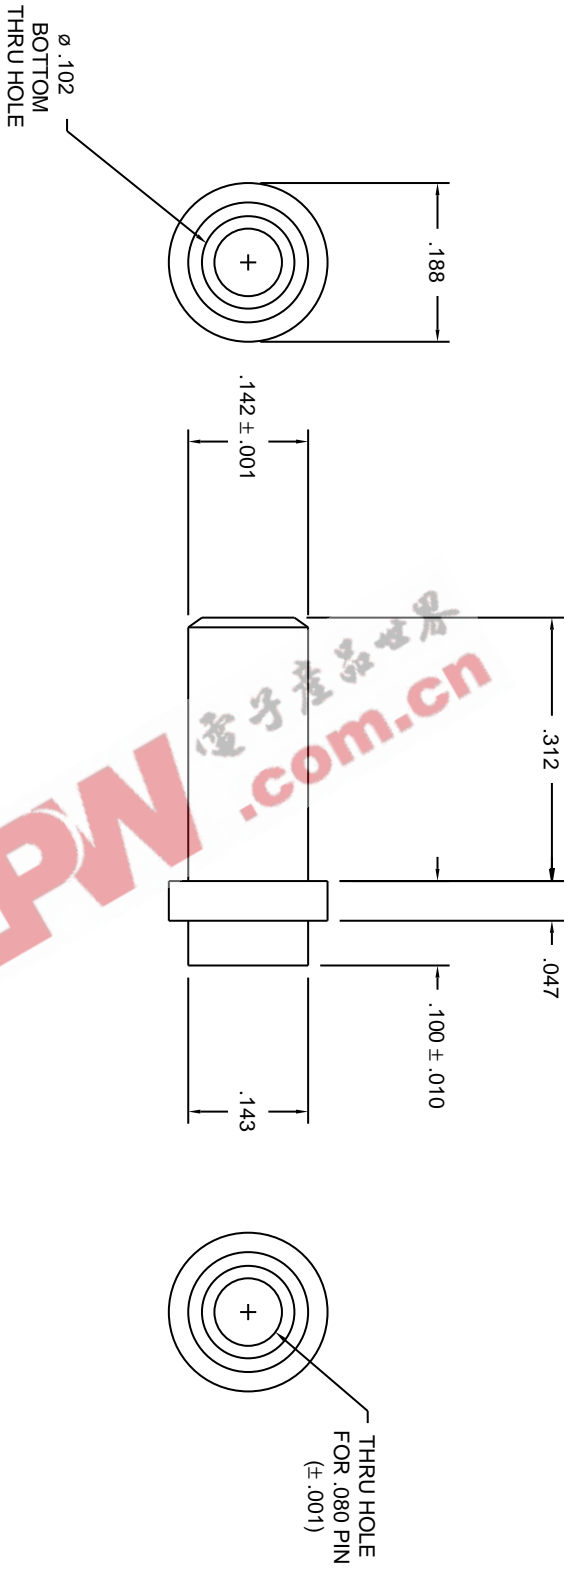

- NOTES:
1. MATERIAL: BRASS QQ-B-626 ALLOY 360 1/2 HARD.
ELECTRO-TIN PER MIL-T-10727, TYPE I
BERYLLIUM COPPER SPRING INSERT
CAPTIVATED.
 2. CONCORD P/N 09-9044-1-004 OR APPROVED
EQUIVALENT.

 ANDOVER, MA, U.S.A.		ø .080 P.C. PIN SOCKET	
DRAWN:		TOLERANCES (EXCEPT AS NOTED)	
CHECKED:		XX ± .01	DRAWING NO.
APPD:		XXX ± .005	01828
ALL DIMENSIONS ARE IN INCHES (MILLIMETERS)		FRACT ± 1/64	REV.
DO NOT SCALE DRAWING		ANGLES ± 1°	2
NEXT ASSY:		SCALE: 4X	SHEET _____ OF _____