




KBPC300G THRU KBPC310G
SINGLE PHASE 3.0 AMPS. GLASS PASSIVATED BRIDGE RECTIFIERS



VOLTAGE RANGE
 50 to 1000 Volts
CURRENT
 3.0 Amperes

KBPC-3

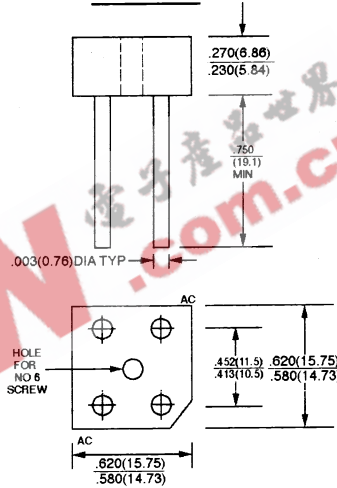

Dimensions in inches and (millimeters)

FEATURES

- * Glass passivated junction
- * Surge overload rating 60 amperes peak
- * Low forward voltage drop
- * Small size, simple installation
- * Leads solderable per MIL-STD-202, method 208

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating, at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

TYPE NUMBER	SYMBOLS	KBPC 300G	KBPC 301G	KBPC 302G	KBPC 304G	KBPC 306G	KBPC 308G	KBPC 310G	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum D. C. Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_C = 50^\circ C$	$I_{F(AV)}$	3.0							A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load(JEDEC method)	I_{FSM}	60							A
Maximum Forward Voltage Drop per element @ 1.5A	V_F	1.10							V
Maximum Reverse Current at Rated @ $T_A = 25^\circ C$ D. C. Blocking Voltage per element @ $T_A = 125^\circ C$	I_R	10 500							μA μA
Operating Temperature Range	T_J	-55 to + 150							$^\circ C$
Storage Temperature Range	T_{STG}	-55 to + 150							$^\circ C$



RATINGS AND CHARACTERISTIC CURVES (KBPC300G THRU KBPC310G)

FIG. 1 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT - PER ELEMENT

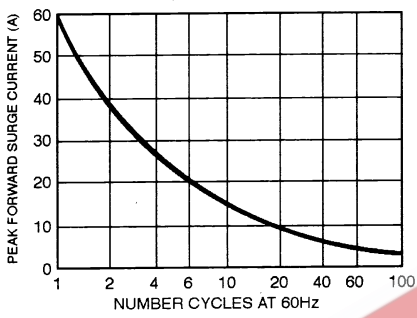


FIG. 2 - TYPICAL FORWARD OUTPUT CURRENT DERATING CURVE

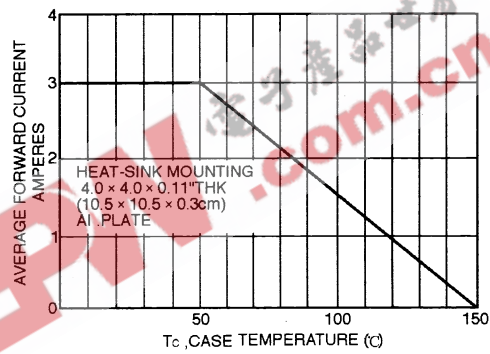


FIG. 3 - TYPICAL FORWARD CHARACTERISTICS - PER ELEMENT

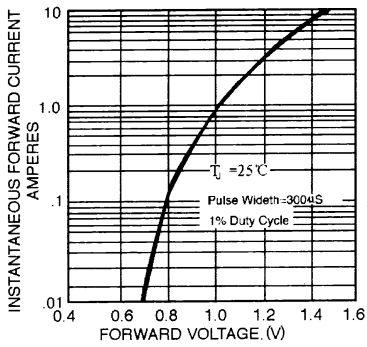


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS - PER ELEMENT

