


**KSR1108**

**NPN EPITAXIAL SILICON TRANSISTOR**

**SWITCHING APPLICATION (Bias Resistor Built In)**

- Switching Circuit, Inverter, Interface circuit  
Driver circuit
- Built in bias Resistor ( $R_1=47K\Omega$ ,  $R_2=22K\Omega$ )
- Complement to KSR2108

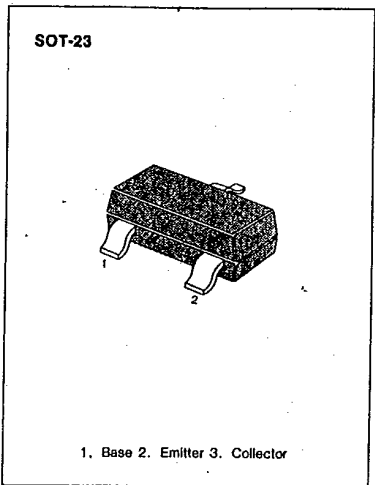


**ABSOLUTE MAXIMUM RATINGS ( $T_a=25^\circ C$ )**

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	$V_{CBO}$	50	V
Collector-Emitter Voltage	$V_{CEO}$	50	V
Emitter-Base Voltage	$V_{EBO}$	10	V
Collector Current	$I_C$	100	mA
Collector Dissipation	$P_C$	200	mW
Junction Temperature	$T_j$	150	$^\circ C$
Storage Temperature	$T_{stg}$	-55 ~ 150	$^\circ C$


**ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ C$ )**

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector-Base Breakdown Voltage	$BV_{CBO}$	$I_C=10\mu A, I_E=0$	50			V
Collector-Emitter Breakdown Voltage	$BV_{CEO}$	$I_C=100\mu A, I_B=0$	50			V
Collector Cutoff Current	$I_{CBO}$	$V_{CB}=40V, I_E=0$			0.1	$\mu A$
DC Current Gain	$h_{FE}$	$V_{CE}=5V, I_C=5mA$	56			
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=10mA, I_B=0.5mA$			0.3	V
Current Gain-Bandwidth Product	$f_T$	$V_{CE}=5mA, I_C=10V$		250		MHz
Output Capacitance	$C_{ob}$	$V_{CB}=10V, I_E=0$ $f=1.0MHz$		3.7		pF
Input Off Voltage	$V_i(off)$	$V_{CE}=5V, I_C=100\mu A$	0.8			V
Input On Voltage	$V_i(on)$	$V_{CE}=0.3V, I_C=2mA$			4	V
Input Resistor	$R_1$		32	47	62	$K\Omega$
Resistor Ratio	$R_1/R_2$		1.9	2.1	2.4	

**Equivalent Circuit**

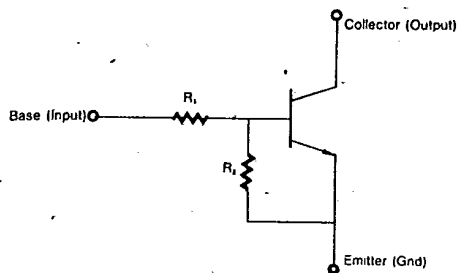


**Marking**




**KSR1108 NPN EPITAXIAL SILICON TRANSISTOR**


INPUT ON VOLTAGE

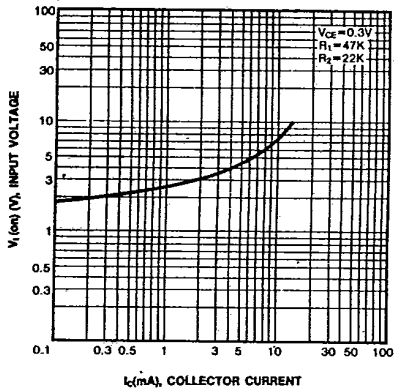

DC CURRENT GAIN

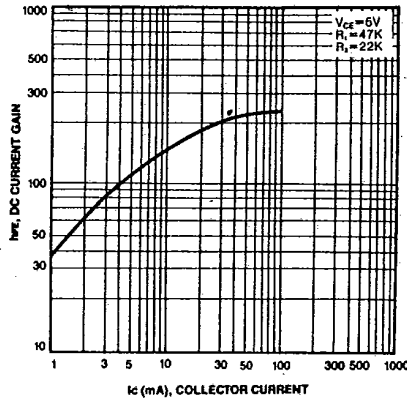

INPUT OFF VOLTAGE

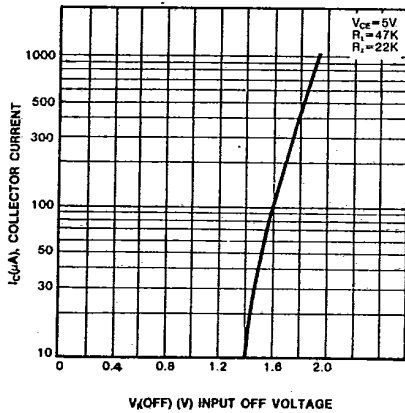

POWER DERATING

