


FEATURES

The zener voltage are gaded accrding to the international E24 standard. Other voltage tolerances on request

MECHANICAL DATA

- Case: DO-35 glass case
- Polarity: Color band denotes cathode end
- weight: Approx. 0.13 gram

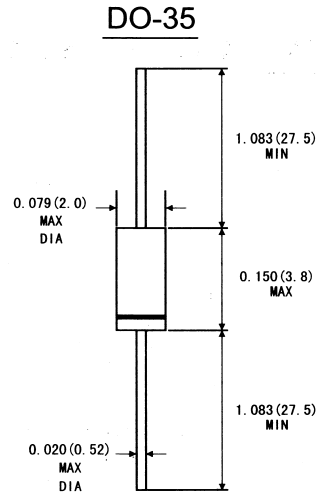

Dimensions in inches and (millimeters)

ABSOLUTE MAXIMUM RATINGS(LIMITING VALUES)(TA=25°C)

	Symbols	Value	Units
Zener current see table "Characteristics"			
Power dissipation at TA=25°C	P _{tot}	500 ¹⁾	mW
Junction temperature	T _J	175	°C
Storage temperature range	T _{STG}	-55 to +175	°C

1)Valid provided that a distance of 8mm from case are kept at ambient temperature

ELECTRCAL CHARACTERISTICS(TA=25°C)

	Symbols	Min	Typ	Max	Units
Thermal resistance junction to ambient	R θ JA			300 ¹⁾	K/W
Forward voltage at I _F =100mA	V _F			1.0	V

1) Valid provided that a distance at 8mm from case are kept at ambient temperature

BZX97... SILICON PLANAR ZENER DIODES

Type	Zener Voltage range 1)			Dynamic resistance			Reverse leakage current			Temp Coefficient of zener voltage	
	V _{znom}	I _{ZT} for V _{ZT} 2)		r _{ZJT} and r _{ZJK} at I _{ZK}			I _R and I _{R2} at V _R			TK _{VZ}	
	v	mA	V	Ω	Ω	mA	μA	μA	V	%/K	
BZX 97/C 2V4	2.4	5	2.28..2.56	<85	<600	1	<10000	<50	1	135	
BZX 97/C 2V7	2.7		2.5..2.9				<10000	<50		135	
BZX 97/C 3V0	3.0		2.8..3.2				<4000	<40		125	
BZX 97/C 3V3	3.3		3.1..3.5				<2000			<40	115
BZX 97/C 3V6	3.6		3.4..3.8								105
BZX 97/C 3V9	3.9		3.7..4.1								95
BZX 97/C 4V3	4.3		4.0..4.6	<75	<1000		<20	90			
BZX 97/C 4V7	4.7		4.4..5.0	<60	<500		<10	85			
BZX 97/C 5V1	5.1		4.8..5.4	<35	<100		<2	1		80	
BZX 97/C 5V6	5.6		5.2..6.0	<25						<450	70
BZX 97/C 6V2	6.2		5.8..6.6	<10					<200	2	64
BZX 97/C 6V8	6.8		6.4..7.2	<8					<150	3	58
BZX 97/C 7V5	7.5		7.0..7.9	<7					<50	5	53
BZX 97/C 8V2	8.2		7.7..8.7	<7						6	47
BZX 97/C 9V1	9.1		8.5..9.6	<10						7	43
BZX 97/C 10	10		9.4..10.6	<15						<70	7.5
BZX 97/C 11	11		10.4..11.6	<20					<70	8.5	36
BZX 97/C 12	12		11.4..12.7	<20					<90	9	32
BZX 97/C 13	13		12.4..14.1	<26					<110	10	29
BZX 97/C 15	15		13.8..15.6	<30					<110	11	27
BZX 97/C 16	16		15.3..17.1	<40					<170	12	24
BZX 97/C 18	18		16.8..19.1	<50					<170	14	21
BZX 97/C 20	20		18.8..21.2	<55					<220	15	20
BZX 97/C 22	22		20.8..23.3	<55					<80	17	18
BZX 97/C 24	24		22.8..25.6	<220						18	16
BZX 97/C 27	27		25.1..28.9							20	14
BZX 97/C 30	30		28..32							22	13
BZX 97/C 33	33		31..35							24	12
BZX 97/C 36	36	34..38	<90	<250		26			11		
BZX 97/C 39	39	2.5	37..41	<100		<6002)			28	10	
BZX 97/C 43	43		40..46	<100		<7002)			32	9.2	
BZX 97/C 47	47		44..50	<120		<10002)			34	8.5	
BZX 97/C 51	51		48...54	<135		<10002)			36	7.8	

1) Teated with pulses tp=20ms

2) Measured at I_Z=0.5mA

3) Valid provided that leads are kept at ambient temperature at a distance of 8mm from case