



# 20mA Air-Core Tachometer Drive Circuit

## Description

The CS289 is specifically designed for use with air-core meter movements. The IC has charge pump circuitry for frequency-to-voltage conversion, a shunt regulator for stable

operation, a function generator, and sine and cosine amplifiers. The buffered sine and cosine outputs will typically sink or source 20mA.


## Features

- Single Supply Operation
- On-Chip Regulation
- 20mA Output Drive Capability

## Absolute Maximum Ratings


Supply Voltage ( $V_{CC}$ ).....	20V
Operating Temperature .....	-40°C to +100°C
Junction Temperature.....	-40°C to 150°C
Storage Temperature.....	-65°C to +150°C
Lead Temperature Soldering	
Wave Solder (through hole styles only).....	10 sec. max, 260°C peak
Reflow (SMD styles only).....	60 sec. max above 183°C, 230°C peak

## Block Diagram

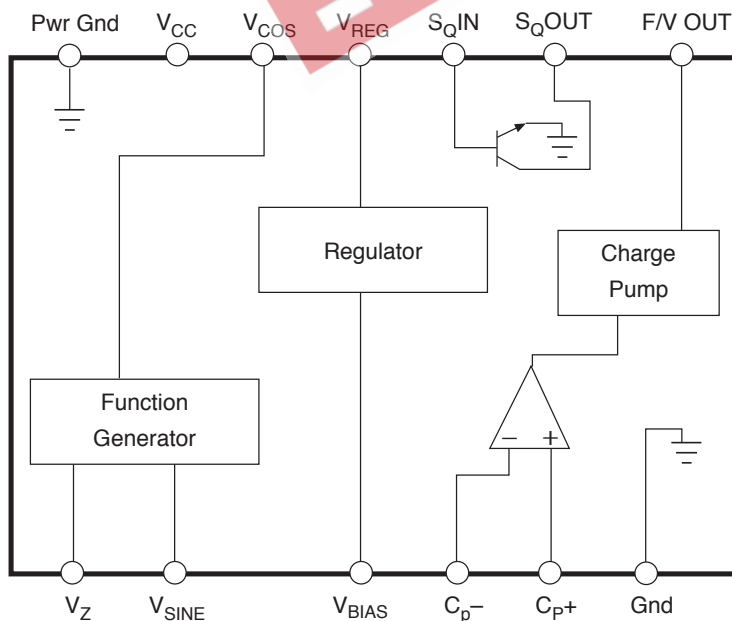


## Package Options

### 14L PDIP



### 20L SOIC Wide (internally fused leads)

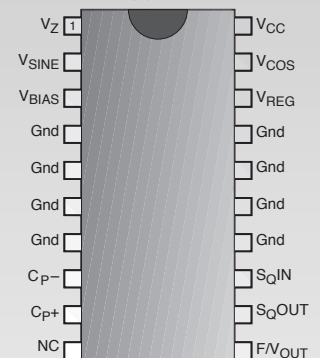

Cherry Semiconductor Corporation  
 2000 South County Trail, East Greenwich, RI 02818  
 Tel: (401)885-3600 Fax: (401)885-5786  
 Email: info@cherry-semi.com  
 Web Site: www.cherry-semi.com

Electrical Characteristics: ( $V_{CC} = 13.1V$ ,  $-30^{\circ}C \leq T_A \leq 85^{\circ}C$ )

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Current (Note 2)	$V_{CC} = 15.0V$		54		mA
	$V_{CC} = 13.1V$		60	65	mA
	$V_{CC} = 11.3V$		60	65	mA
Regulated Voltage	$I_{REG} = 4.3mA$	7.7	8.5	9.3	V
Regulation	$I_{REG} = 0$ to 5mA		0.10	0.20	V
Signal Input Current	$T = 25^{\circ}C$	0.1	2.0	4.0	mA
Saturation Voltage	$I_{SQ\ OUT} = 5mA$ , $I_{SQ\ IN} = 500\mu A$		0.20	0.55	V
Leakage Current	$I_{SQ\ OUT} = 16V$ , $V_{SQ\ IN} = 0V$			10	$\mu A$
Input Current	$C_{P+} = 0$ , $T = 25^{\circ}C$		1	15	nA
F to V Output	$V_{SQ\ IN} = 0$ (zero input), $\phi = 0^{\circ}$	1.8	2.1	2.4	V
	$V_{COS} = 0$ (Note 1), $\phi = 270^{\circ}$	6.3	7.1	7.9	
Linearity	$E_O$ vs. Frequency				
	$V_{COS} = 0$ (Note 1), $\phi = 270^{\circ}$ , $T = 25^{\circ}C$	-1.5		1.5	%
$V_{sine}$ at $\phi = 0^{\circ}$	$V_{SQ\ IN} = 0$ (zero input), $\phi = 0^{\circ}$	-0.55	0.00	0.55	V
MAX $V_{sine+}$	$V_{COS} = 0$ (Note 1), $\phi = 90^{\circ}$	3.8	4.5	5.8	V
MAX $V_{sine-}$	$V_{COS} = 0$ (Note 1), $\phi = 270^{\circ}$	-3.8	-4.5	-5.8	V
Coil Drive Current	$V_{COS} = 0$ (Note 1), $\phi = 90^{\circ}$ , $T = 25^{\circ}C$		20	25	mA
	$V_{COS} = 0$ (Note 1), $\phi = 270^{\circ}$		20	25	mA
MAX $V_{COS+}$	$V_{SQ\ IN} = 0$ (zero input), $\phi = 0^{\circ}$	3.8	4.5	5.8	V
MAX $V_{COS-}$	$V_{sine} = 0$ (Note 1), $\phi = 180^{\circ}$	-3.8	-4.5	-5.8	V
Coil Drive Current	$V_{SQ\ IN} = 0$ (zero input), $\phi = 0^{\circ}$		20	25	mA
	$V_{sine} = 0$ (Note 1), $\phi = 180^{\circ}$		20	25	mA
External Voltage Ref.		4.98	5.40	5.85	V

Note 1:  $V_{sine}$  measured  $V_{sine}$  to  $V_Z$ .  $V_{COS}$  measured  $V_{COS}$  to  $V_Z$ . All other voltages specified are measured to ground.

Note 2: Max PWR dissipation  $\leq V_{CC} \times I_{CC} - (V_2 I_{sine} + V_{I2} I_{COS})$ .

## Package Pin Description

PACKAGE PIN #	PIN SYMBOL	FUNCTION
<b>20L SO</b>		
<i>(internally fused leads)</i> <b>14L PDIP</b>		
1	1	$V_Z$ External Zener reference.
2	2	$V_{sine}$ Sine output signal.
3	4	$V_{BIAS}$ Test pin or "0" calibration pin.
4, 5, 6, 7, 14, 15, 16, 17	7	Gnd Analog Ground connection.
8	5	$C_{P-}$ Negative input to charge pump.
9	6	$C_{P+}$ Positive input to charge pump.
10	3	NC No Connection
11	8	F/ $V_{OUT}$ Output voltage proportional to input signal frequency.

**Package Pin Description: continued**


PACKAGE PIN #		PIN SYMBOL	FUNCTION
20L SO	14L PDIP		
12	9	S <sub>Q</sub> OUT	Buffered square wave output signal.
13	10	S <sub>Q</sub> IN	Speed or RPM input signal.
18	11	V <sub>REG</sub>	Voltage regulator output.
19	12	V <sub>COS</sub>	Cosine output signal.
20	13	V <sub>CC</sub>	Supply voltage.
	14	Pwr Gnd	Power Ground connection.

Note 1: V<sub>sine</sub> measured V<sub>sine</sub> to V<sub>Z</sub>. V<sub>cos</sub> measured V<sub>cos</sub> to V<sub>Z</sub>. All other voltages specified are measured to ground.


Note 2: Max PWR dissipation  $\leq V_{CC} \times I_{CC} - (V_2 I_{sine} + V_{12} I_{cos})$ .

**Typical Performance Characteristics**


**Output Angle in Polar Form**

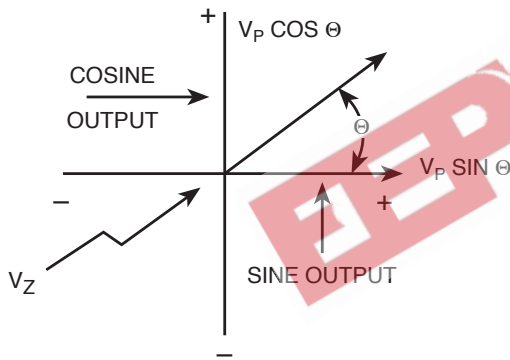

**Charge Pump Output Voltage**

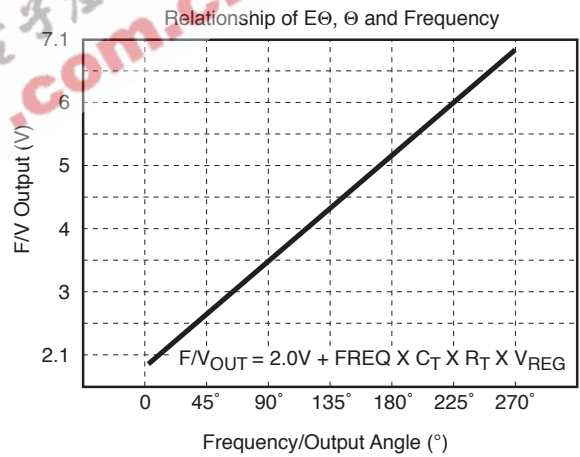

**Function Generator Output Voltage**

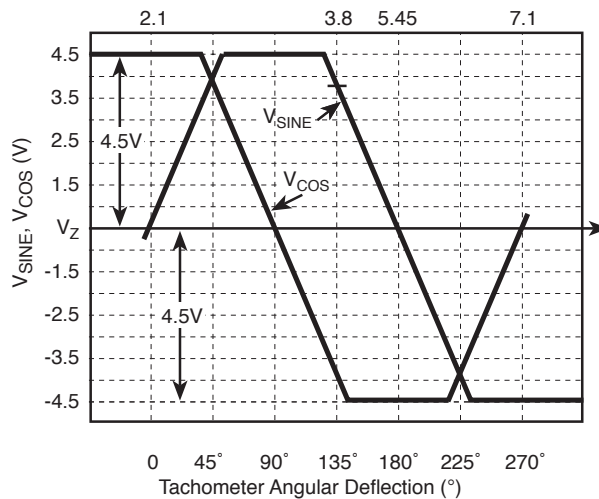



$$\frac{\text{RPM}}{60} \times \frac{\# \text{ OF CYL.}}{2} = \text{Frequency}$$

$$V_{F/V_{OUT}} = 2.1 + \text{Frequency} \times C_T \times R_T (V_{REG} - 0.7)$$

The above equations were used in calculating the following values, where  $V_{F/V_{OUT}} = 7.1V$  at  $\pm 270^\circ$  and  $C_T = 0.01 F$ .

- 4 cylinder: Freq = 200Hz,  $R_T = 320k\Omega$
- 6 cylinder: Freq = 300Hz,  $R_T = 220k\Omega$
- 8 cylinder: Freq = 400Hz,  $R_T = 150k\Omega$

Typical values shown above apply to a nominal value of  $V_{REG}$  of 8.5 volts. It must be realized that trimming of  $R_T$  will be necessary to compensate for variations in regulator voltage from one unit to another.

An alternative to this adjustment is to replace  $R_2$  with a potentiometer, as shown in Figure 2.

Partial schematic shown in Figure 3 represents one method for use with DC applications instead of frequency.

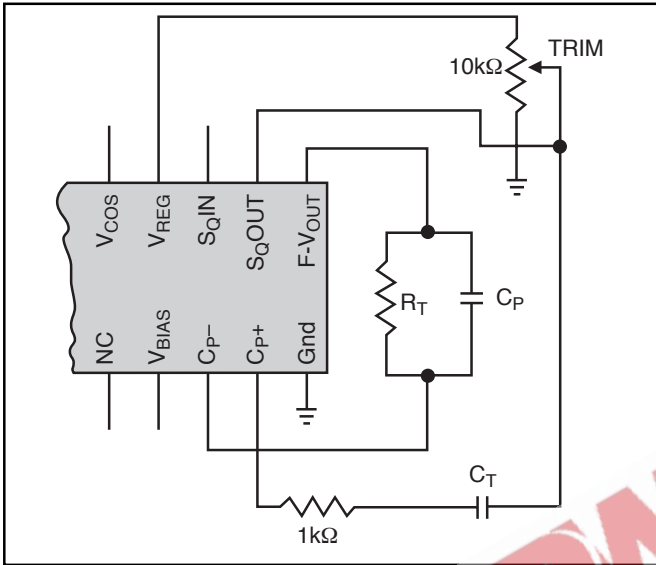


Figure 2: Alternate Trimming Method


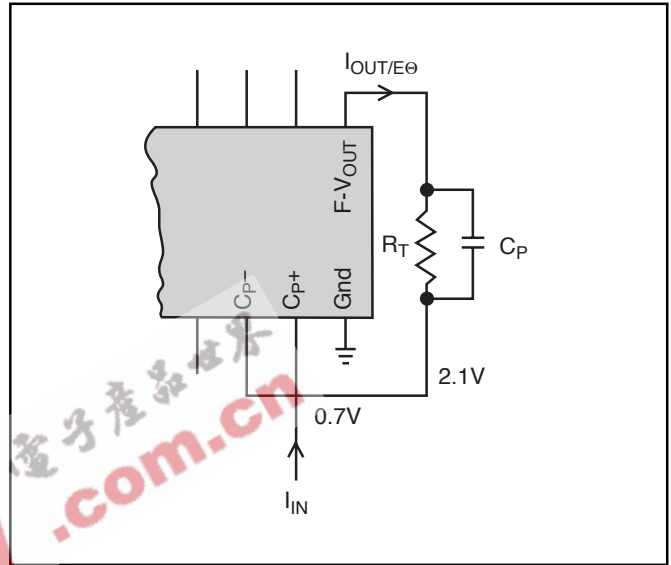


Figure 3: DC Application

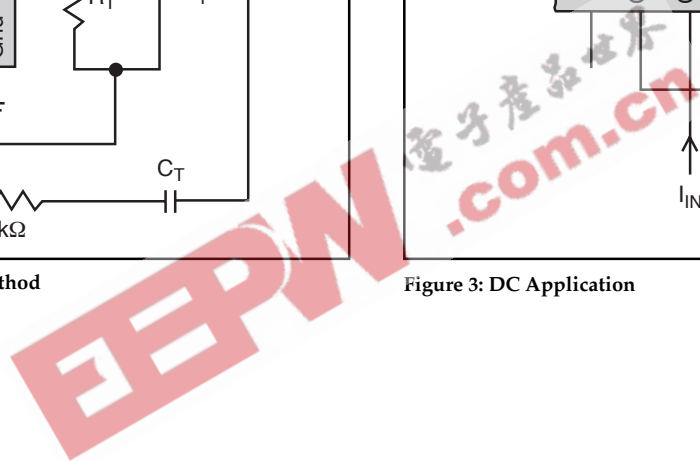

Package Specification


PACKAGE DIMENSIONS IN mm (INCHES)

Lead Count	D			
	Metric		English	
	Max	Min	Max	Min
14L PDIP	19.69	18.67	.775	.735
20L SO Wide <i>(internally fused leads)</i>	13.00	12.60	.512	.496


PACKAGE THERMAL DATA

Thermal Data		14L PDIP Wide	20L SOIC <i>(internally fused leads)</i>	
R <sub>θJC</sub>	typ	48	17	°C/W
R <sub>θJA</sub>	typ	85	90	°C/W

Plastic DIP (N); 300 mil wide

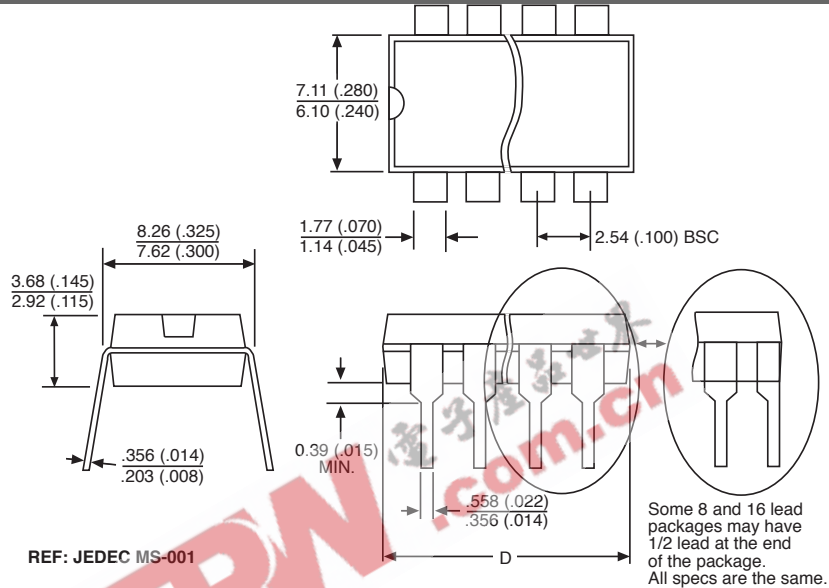

Surface Mount Wide Body (DW); 300 mil wide

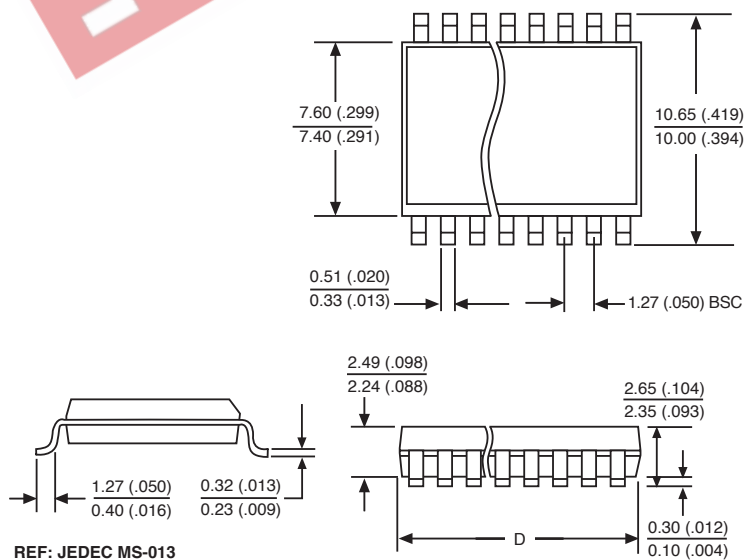

Ordering Information

Part Number	Description
CS289GDWF20	20 Lead SO Wide <i>(internally fused leads)</i>
CS289GDWFR20	20 Lead SO Wide <i>(internally fused leads)</i> <i>(tape &amp; reel)</i>
CS289GN14	14 Lead PDIP

Cherry Semiconductor Corporation reserves the right to make changes to the specifications without notice. Please contact Cherry Semiconductor Corporation for the latest available information.