


## KBU8A THRU KBU8M

CURRENT 8.0 Amperes  
VOLTAGE 50 to 1000 Volts

### Features

- Low Forward Voltage Drop, High Current Capability
- Surge Overload Rating to 300A Peak
- Ideal for Printed Circuit Board Applications
- Case to Terminal Isolation Voltage 1500V
- Plastic Material - UL Flammability Classification Rating 94V-0

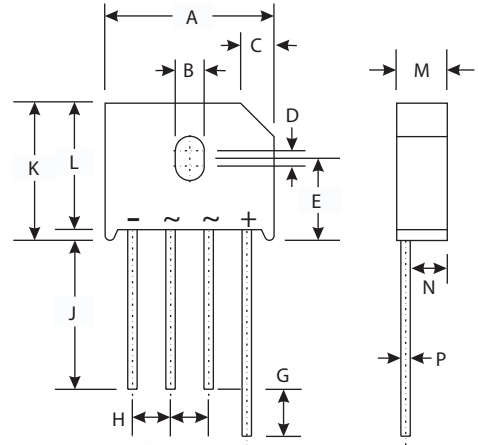

### Mechanical Data

- Case : Molded Plastic
- Terminals : Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity : As Marked on Case
- Mounting : Through Hole for #6 Screw
- Mounting Torque : 5.0 Inch-pounds Maximum
- Weight : 8.0 grams (approx.)
- Marking : Type Number

KBU					
Dim	Min	Max	Dim	Min	Max
A	22.70	23.70	J	25.40	—
B	3.80	4.10	K	—	19.30
C	4.20	4.70	L	16.80	17.80
D	1.70	2.20	M	6.60	7.10
E	10.30	11.30	N	4.70	5.20
G	4.50	6.80	P	1.20	1.30
H	4.80	5.80			

All Dimensions in mm

### Maximum Ratings And Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified, Single phase, half wave 60Hz, resistive or inductive load. For capacitive load, derate by 20%)

	Symbols	KBU 8A	KBU 8B	KBU 8D	KBU 8G	KBU 8J	KBU 8K	KBU 8M	Units
Peak Repetitive Reverse voltage Working Peak Reverse voltage DC Blocking voltage	$V_{RMM}$ $V_{RWM}$ $V_R$	50	100	200	400	600	800	1000	Volts
RMS Reverse voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Average Rectified Output Current @ $T_C=100^\circ\text{C}$	$I_o$	8.0							Amps
Non-Repetitive Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	300							Amps
Forward voltage (per element) @ $I_F=4.0\text{ A}$	$V_{FM}$	1.0							Volts
Peak Reverse Current at Rated DC Blocking voltage	@ $T_C=25^\circ\text{C}$	10							$\mu\text{ A}$
	@ $T_C=125^\circ\text{C}$	1.0							mA
$I^2t$ Rating for Fusing (Note 2)	$I^2t$	373							$\text{A}^2\text{s}$
Typical Thermal Resistance, Junction to Case (Note 1)	$R\theta_{JA}$	7.5							$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	$T_j$ $T_{STG}$	-65 to +150							$^\circ\text{C}$

#### Notes:

- (1) Thermal resistance junction to case mounted on heat sink.
- (2) Non-repetitive, for  $t > 1.0\text{ms}$  and  $t < 8.3\text{ms}$ .

## RATINGS AND CHARACTERISTIC CURVES KBU8A THRU KBU8M

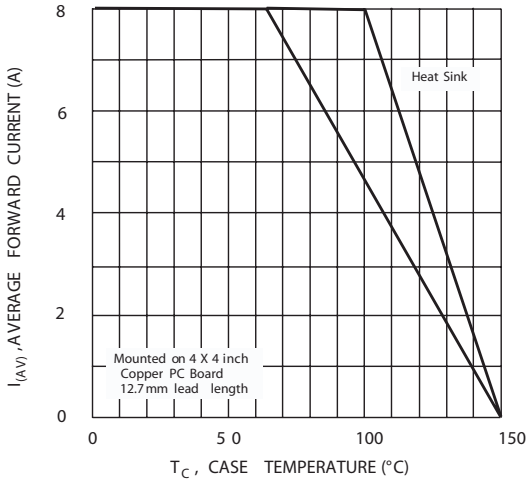


Fig. 1 Forward Current Derating Curve

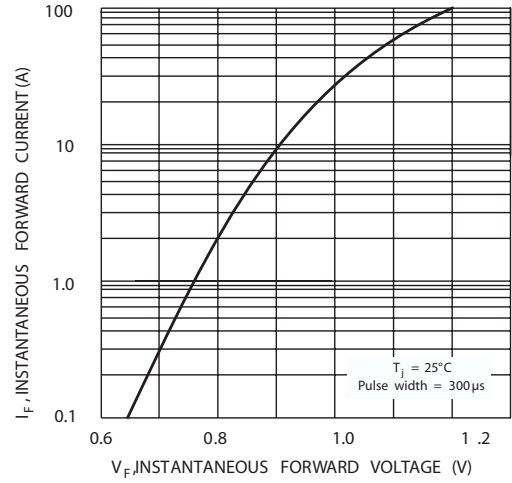


Fig. 2 Typical Forward Characteristics

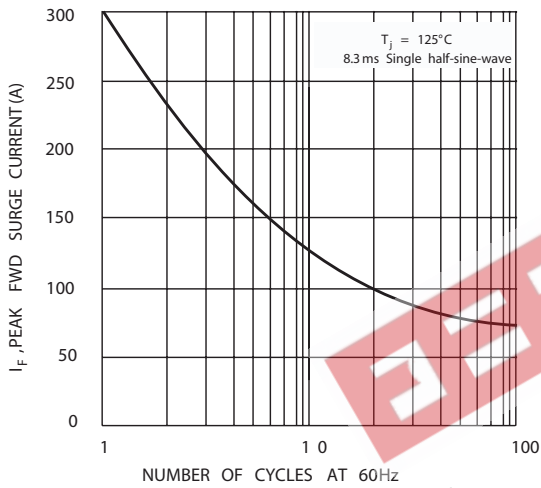


Fig. 3 Max Non-Repetitive Surge Forward Current

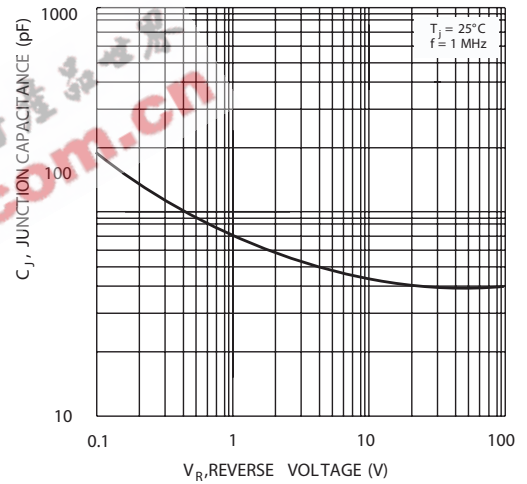


Fig. 4 Typical Junction Capacitance per element

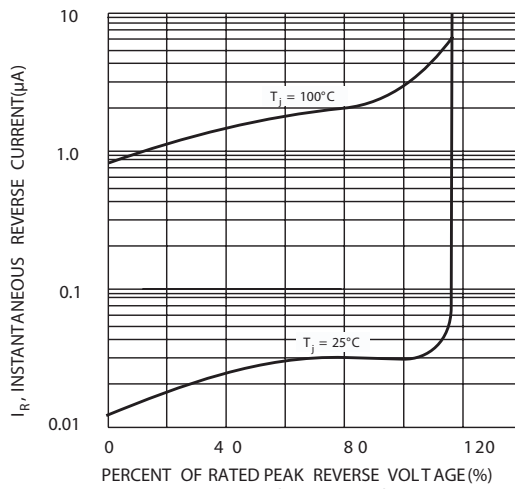


Fig. 5 Typical Reverse Characteristics