

# FD1000FV-90

HIGH POWER, HIGH FREQUENCY,  
PRESS PACK TYPE


## FD1000FV-90



- IF(AV) Average forward current ..... 800A
- VRRM Repetitive peak reverse voltage ..... 3500 ~ 4500V
- QRR Reverse recovery charge ..... 1500μC
- Press pack type

## OUTLINE DRAWING

Dimensions in mm

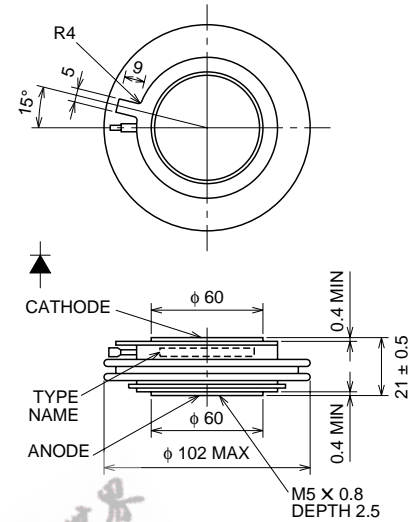

## APPLICATION

High-power inverters, Fly-wheel diodes in DC choppers, Power supplies as high frequency rectifiers

## MAXIMUM RATINGS

Symbol	Parameter	Voltage class			Unit
		70	80	90	
VRRM	Repetitive peak reverse voltage	3500	4000	4500	V
VRSM	Non-repetitive peak reverse voltage	3500	4000	4500	V
VR(DC)	DC reverse voltage	2800	3200	3600	V

Symbol	Parameter	Conditions	Ratings	Unit
IF(RMS)	RMS forward current		1250	A
IF(AV)	Average forward current	f = 60Hz, sine wave $\theta = 180^\circ$ , $T_f = 88^\circ\text{C}$	800	A
IFSM	Surge forward current	One half cycle at 60Hz, non-repetitive	20	kA
$I^2t$	Current-squared, time integration	One cycle at 60Hz	$1.7 \times 10^6$	A <sup>2</sup> s
$T_j$	Junction temperature		-40 ~ +125	°C
$T_{stg}$	Storage temperature		-40 ~ +150	°C
—	Mounting force required	Recommended value 39.2	26.5 ~ 43.1	kN
—	Weight	Standard value	700	g







## ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
IRRM	Repetitive peak reverse current	$T_j = 125^\circ\text{C}$ , VRRM Applied	—	—	150	mA
VFM	Forward voltage	$T_j = 125^\circ\text{C}$ , IFM = 2500A, Instantaneous measurement	—	—	3.0	V
QRR	Reverse recovery charge	IFM = 800A, diF/dt = -30A/μs, VR = 150V, $T_j = 125^\circ\text{C}$	—	—	1500	μC
Rth(j-f)	Thermal resistance	Junction to fin	—	—	0.017	°C/W

**FD1000FV-90**

**HIGH POWER, HIGH FREQUENCY,  
PRESS PACK TYPE**


**PERFORMANCE CURVES**

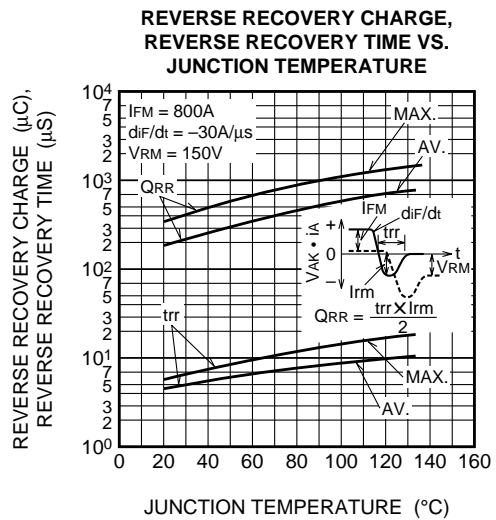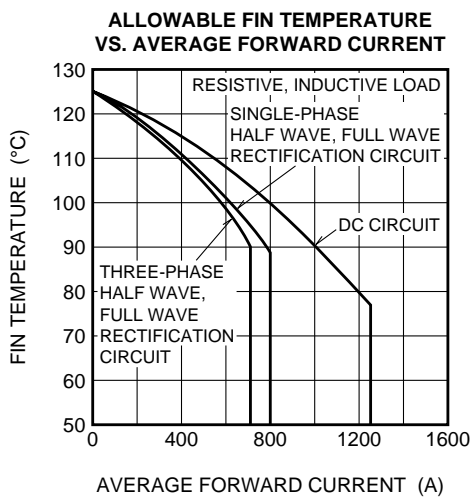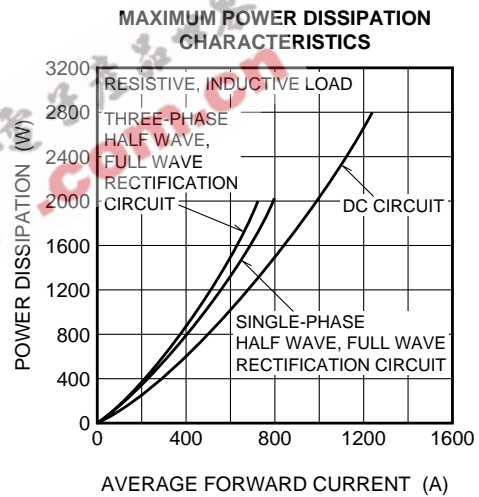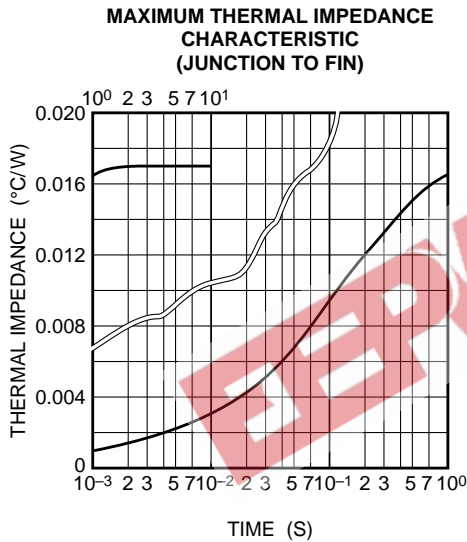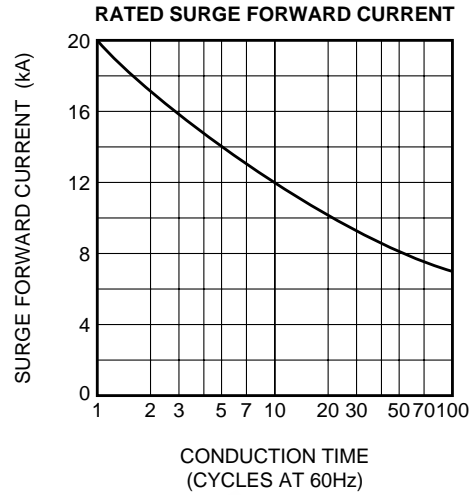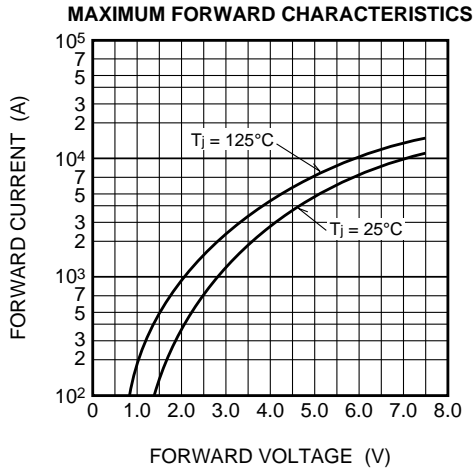

**FD1000FV-90**

HIGH POWER, HIGH FREQUENCY,  
PRESS PACK TYPE

**REVERSE RECOVERY CHARGE,  
REVERSE RECOVERY TIME VS.  
FORWARD CURRENT**

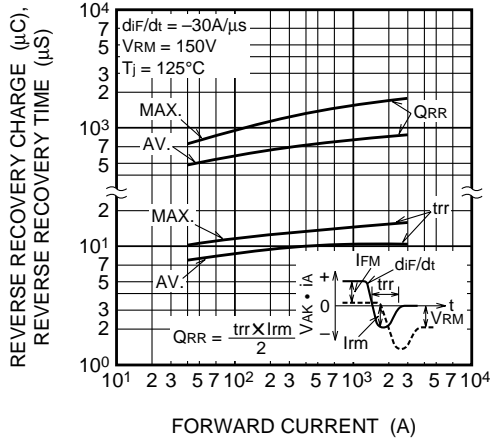

**REVERSE RECOVERY CHARGE,  
REVERSE RECOVERY TIME VS. RATE  
OF DECREASE OF REVERSE CURRENT**

