


LTR.	DESCRIPTION	DATE	APP'D.
1	PRELIMINARY RELEASE PCD# 044	S.P.V. 2/18/88	ASJ

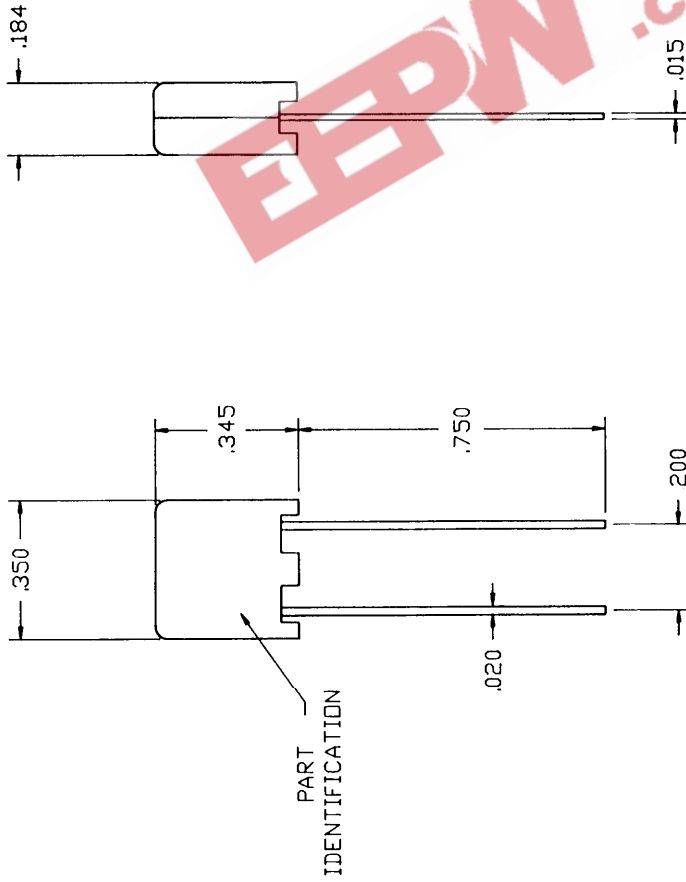

COPY

SPECIFICATIONS:
INTERUPTING AND VOLTAGE RATINGS:
10,000 A @ 125V _{ac}
TIME-CURRENT CHARACTERISTICS:
CARRY 100% OF RATING FOR FOUR HOURS MINIMUM. OPEN AT 200% OF RATING IN TEN SECONDS MAXIMUM. (NON-TIME-DELAY).
AGENCY APPROVALS:
U.L. RECOGNIZED; FILE E19180
CSA CERTIFIED; FILE 42731, CLASS 1-21-01
COLD RESISTANCE DATA (10% RATED CURRENT)
NOMINAL VALUE:
0.026 Ω

NOTES:
 1. BUSS #PCD5-125 OR APPROVED EQUIVALENT.

DRW	2/88	TOLERANCES	DRAWING NO.	REV.
CHECKED: [Signature]	3/88	(EXCEPT AS NOTED)		
APPR: 1		XX ± .01		
		XX ± .005		
		FRACT ± 1/4		
		ANGLES ± 1.0		
		SCALE NONE	01526	1
				SHEET 1 OF 1

VICOR ANDOVER, MA U.S.A.
FUSE, 5 AMP,
125V, PCD5