


**MOTOROLA**

## 2.0 GHz Low Voltage Dual Modulus Prescaler

The MC12033 is a high frequency low voltage dual modulus prescaler used in phase-locked loop (PLL) applications. A high frequency input signal up to 2.0 GHz is provided for cordless and cellular communication services such as DECT, PHS, and PCS. The MC12033 can be operated down to a minimum supply voltage of 2.7 V required for battery operated portable systems.

The MC12033A can be used with CMOS synthesizer requiring positive edges to trigger internal counters such as Motorola's MC145XXX series in a PLL to provide tuning signal up to 2.0 GHz in programmable frequency steps. The MC12033B can be used with CMOS synthesizers requiring negative edges to trigger internal counters.

A Divide Ratio Control (SW) permits selection of a 32/33 or 64/65 divide ratio as desired.

The Modulus Control (MC) selects the proper divide number after SW has been biased to select the desired divide ratio.

**NOTE: The "B" Version Is Not Recommended for New Designs**

- 2.0 GHz Toggle Frequency
- Supply Voltage 2.7 V to 5.0 Vdc
- Low Power 10.0 mA Typical at  $V_{CC} = 2.7$  V
- Operating Temperature Range of  $-40$  to  $85^{\circ}\text{C}$
- The MC12033 is Pin Compatible With the MC12022
- Short Setup Time ( $t_{set}$ ) 8ns Typical at 2.0 GHz
- Modulus Control Input Level Is Compatible With Standard CMOS and TTL

### FUNCTIONAL TABLE

SW	MC	Divide Ratio
H	H	32
H	L	33
L	H	64
L	L	65

**NOTES:** 1. SW: H =  $V_{CC}$ , L = Open. A logic L can also be applied by grounding this pin, but this is not recommended due to increased power consumption.  
2. MC: H = 2.0 V to  $V_{CC}$ , L = GND to 0.8 V.

### MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Power Supply Voltage, Pin 2	$V_{CC}$	$-0.5$ to $7.0$	Vdc
Operating Temperature Range	$T_A$	$-40$ to $85$	$^{\circ}\text{C}$
Storage Temperature Range	$T_{stg}$	$-65$ to $150$	$^{\circ}\text{C}$
Modulus Control Input, Pin 6	MC	$-0.5$ to $6.5$	Vdc
Maximum Output Current, Pin 4	$I_O$	10.0	mA

**NOTE:** ESD data available upon request.


## MC12033A MC12033B

### MECL PLL COMPONENTS $\div 32/33$ , $\div 64/65$ LOW VOLTAGE DUAL MODULUS PRESCALER

#### SEMICONDUCTOR TECHNICAL DATA




**D SUFFIX**  
PLASTIC PACKAGE  
CASE 751  
(SO-8)



**P SUFFIX**  
PLASTIC PACKAGE  
CASE 626

### PIN CONNECTIONS



### ORDERING INFORMATION

Device	Operating Temp Range	Package
MC12033AD	$T_A = -40^{\circ}$ to $+85^{\circ}\text{C}$	SO-8
MC12033AP		Plastic
MC12033BD		SO-8
MC12033BP		Plastic

## MC12033A MC12033B

**ELECTRICAL CHARACTERISTICS** ( $V_{CC} = 2.7$  to  $5.0$  V;  $T_A = -40$  to  $85^\circ\text{C}$ , unless otherwise noted.)

Parameter	Symbol	Min	Typ	Max	Unit
Toggle Frequency (Sine Wave)	ft	0.5	2.4	2.0	GHz
Supply Current Output (Pin 2)	$I_{CC}$	–	10.0 13.0	12.5 16.0	mA
Modulus Control Input HIGH (MC)	$V_{IH1}$	2.0	–	$V_{CC}$	V
Modulus Control Input LOW (MC)	$V_{IL1}$	Gnd	–	0.8	V
Divide Ratio Control Input HIGH (SW)	$V_{IH2}$	$V_{CC}$	$V_{CC}$	$V_{CC}$	V
Divide Ratio Control Input LOW (SW)	$V_{IL2}$	OPEN	OPEN	OPEN	–
Output Voltage Swing (Note 1)	$V_{OUT}$	0.8	1.2	–	$V_{pp}$
Modulus Setup Time MC to OUT @ 2000 MHz	$t_{set}$	–	8.0	10	ns
Input Voltage Sensitivity	$V_{IN}$	100	–	1000	mVpp
Output Current (Note 2)	$I_O$	–	2.4 2.4	4.0 4.0	mA

**NOTES:** 1. Valid over voltage range 2.7 to 5.0 V;  $R_L = 600 \Omega$  @  $V_{CC} = 2.7$  V;  $R_L = 1.5 \text{ k}\Omega$  @  $V_{CC} = 5.0$  V  
2. Divide ratio of +32/33 @ 2.0 GHz

Figure 1. Logic Diagram (MC12033A)



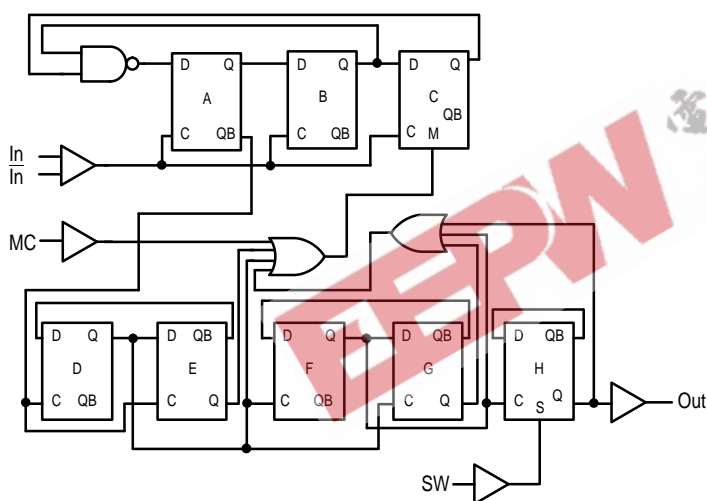


Figure 2. Modulus Setup Time

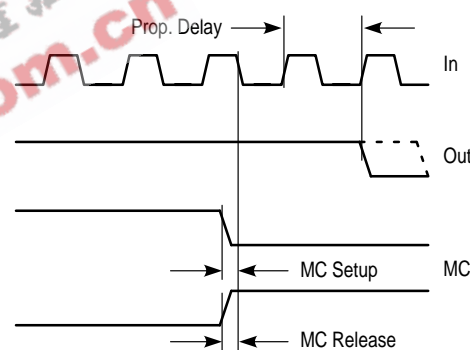

Modulus setup time MC to out is the MC setup or MC release plus the prop delay.


Figure 3. AC Test Circuit

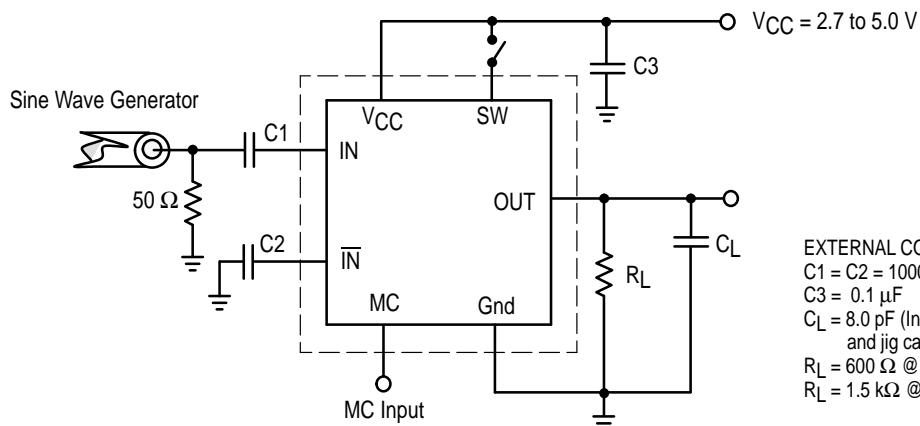


**EXTERNAL COMPONENTS**  
 $C1 = C2 = 1000 \text{ pF}$   
 $C3 = 0.1 \mu\text{F}$   
 $C_L = 8.0 \text{ pF}$  (Including Scope and jig capacitance)  
 $R_L = 600 \Omega$  @  $V_{CC} = 2.7 \text{ V}$   
 $R_L = 1.5 \text{ k}\Omega$  @  $V_{CC} = 5.0 \text{ V}$

# MC12033A MC12033B

## Figure 4. Input Signal Amplitude versus Input Frequency

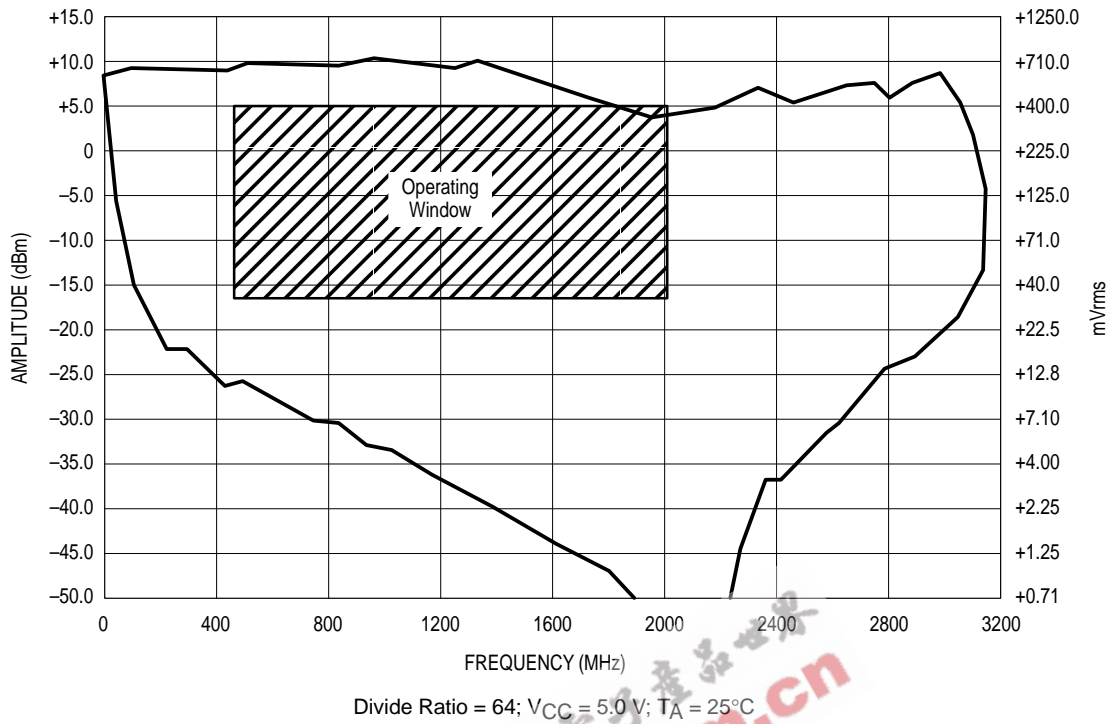

## Figure 5. Output Amplitude versus Input Frequency

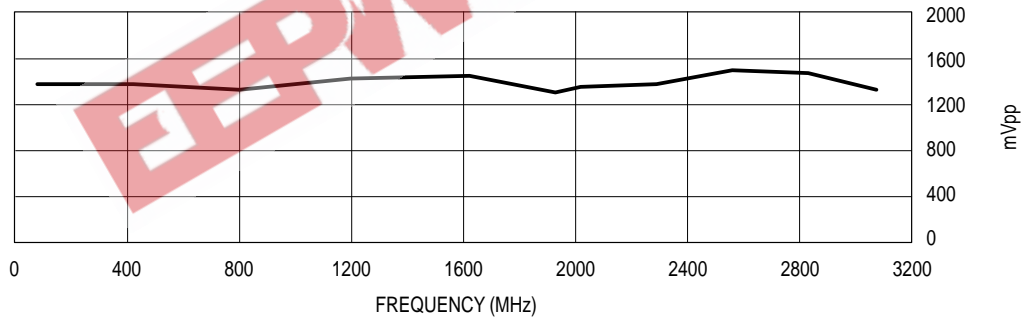

# MC12033A MC12033B

## OUTLINE DIMENSIONS

**P SUFFIX**  
PLASTIC PACKAGE  
CASE 626-05  
ISSUE K

**NOTES:**  
1. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.  
2. PACKAGE CONTOUR OPTIONAL (ROUND OR SQUARE CORNERS).  
3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.40	10.16	0.370	0.400
B	6.10	6.60	0.240	0.260
C	3.94	4.45	0.155	0.175
D	0.38	0.51	0.015	0.020
F	1.02	1.78	0.040	0.070
G	2.54 BSC		0.100 BSC	
H	0.76	1.27	0.030	0.050
J	0.20	0.30	0.008	0.012
K	2.92	3.43	0.115	0.135
L	7.62 BSC		0.300 BSC	
M	10°		10°	
N	0.76	1.01	0.030	0.040

$\oplus \text{ } \ominus 0.13 (0.005) \text{ } \textcircled{M} \text{ } \textcircled{T} \text{ } \textcircled{A} \text{ } \textcircled{B} \text{ } \textcircled{M}$

**D SUFFIX**  
PLASTIC PACKAGE  
CASE 751-06  
(SO-8)  
ISSUE T

**NOTES:**  
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.  
2. DIMENSIONS ARE IN MILLIMETER.  
3. DIMENSION D AND E DO NOT INCLUDE MOLD PROTRUSION.  
4. MAXIMUM MOLD PROTRUSION 0.15 PER SIDE.  
5. DIMENSION B DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 TOTAL IN EXCESS OF THE B DIMENSION AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS	
	MIN	MAX
A	1.35	1.75
A1	0.10	0.25
B	0.35	0.49
C	0.19	0.25
D	4.80	5.00
E	3.80	4.00
e	1.27 BSC	
H	5.80	6.20
h	0.25	0.50
L	0.40	1.25
θ	0°	7°

$\oplus \text{ } \ominus 0.25 \text{ } \textcircled{M} \text{ } \textcircled{C} \text{ } \textcircled{B} \text{ } \textcircled{S} \text{ } \textcircled{A} \text{ } \textcircled{S}$

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  $\textcircled{M}$  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

**How to reach us:**

**USA/EUROPE/Locations Not Listed:** Motorola Literature Distribution;  
P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

**JAPAN:** Nippon Motorola Ltd.: SPD, Strategic Planning Office, 141,  
4-32-1 Nishi-Gotanda, Shagawa-ku, Tokyo, Japan. 03-5487-8488

**Customer Focus Center: 1-800-521-6274**

**Mfax™:** RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609  
Motorola Fax Back System – US & Canada ONLY 1-800-774-1848  
– http://sps.motorola.com/mfax/

**ASIA/PACIFIC:** Motorola Semiconductors H.K. Ltd.: 8B Tai Ping Industrial Park,  
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

**HOME PAGE:** http://motorola.com/sps/

