



■ FEATURES

- 3V to 30V Input Voltage Operation.
- Internal 1.6A Peak Current Switch.
- Internal $\pm 1.8\%$ Reference.
- Low Quiescent Current at 1.6mA.
- Frequency Operation from 100Hz to 100KHz.
- Current Limiting.


■ APPLICATIONS

- Saver for Cellular phones
- DC-DC Converter Module

■ DESCRIPTION

The MC34063A by Analog Integrations Corporation, an improved second source over the industrial standard MC34063A, is a monolithic control circuit containing the primary functions required for DC/DC converters. The device consists of an internal temperature compensated reference, comparator, controlled duty cycle oscillator with an active current limit circuit, driver and high current output switch. This device is specifically designed to be incorporated in step-down, step-up and voltage-inverting applications with a minimum number of external components. The $\pm 1.8\%$ internal reference and low quiescent current of 1.6mA are among the improvements of the device over the competition.

■ TYPICAL APPLICATION CIRCUIT

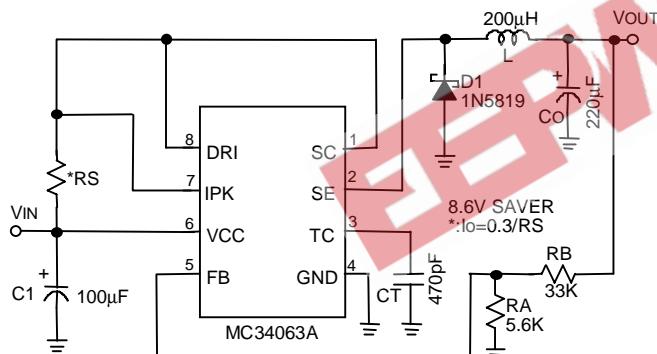


Saver Circuit for Cellular Phone

■ ORDERING INFORMATION

MC34063A XX

PACKAGE TYPE
N: PLASTIC DIP
S: SMALL OUTLINE
TEMPERATURE
C: 0°C~+70°C

ORDER NUMBER	PIN CONFIGURATION
MC34063ACN (PLASTIC DIP)	TOP VIEW 
MC34063ACS (PLASTIC SO)	



■ ABSOLUTE MAXIMUM RATINGS

Supply Voltage	30V
Comparator Input Voltage Range	-0.3V~30V
Switch Collector Voltage	30V
Switch Emitter Voltage	30V
Switch Collector to Emitter Voltage	30V
Driver Collector Voltage	30V
Switch Current	1.6A

Power Dissipation and Thermal Characteristics

DIP Package

Ta= 25°C	1.0W
Thermal Resistance	100°C /W

SO Package







Ta= 25°C.....	625mW
Thermal Resistance	160°C /W
Operating Junction Temperature	125°C
Operating Ambient Temperature Range	0°C~70°C
Storage Temperature Range	- 65°C~150°C

■ ELECTRICAL CHARACTERISTICS (V_{CC}= 5V, T_a=25°C, unless otherwise specified.)

PARAMETER	TEST CONDITIONS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Oscillator						
Charging Current	5.0V≤V _{CC} ≤30V	I _{CHG}	10	25	40	μA
Discharge Current	5.0V≤V _{CC} ≤30V	I _{DISCHG}	100	150	200	μA
Voltage Swing	PIN 3	V _{OSC}		0.6		V
Discharge to Charge Current Ratio	V _{IPK(SENSE)} = V _{CC}	I _{DISCHG} / I _{CHG}		6.0		
Current Limit Sense Voltage	I _{CHG} =I _{DISCHG}	V _{IPK(SENSE)}	250	300	350	mV
Output Switch						
Saturation Voltage, Darlington Connection	I _{SW} =1.0A; V _{C(DRIVER)} =V _{C(SWITCH)}	V _{CE(SAT)}		1.0	1.3	V
Saturation Voltage	I _{SW} =1.0A; I _{C(DRIVER)} =50mA (Forced β=20)	V _{CE (SAT)}		0.4	0.7	V
DC Current Gain	I _{SW} =1.0A; V _{CE} =5.0V	h _{FE}	35	120		
Collector Off-State Current	V _{CE} =30V	I _{C(OFF)}		10		nA
Comparator						
Threshold Voltage	0°C≤T _a ≤70°C	V _{FB}	1.227	1.25	1.273	V
Threshold Voltage			1.21		1.29	V
Threshold Voltage Line Regulation	3.0V≤V _{CC} ≤30V	REG _{LINE}		0.1	0.3	mV/V
Input Bias Current	V _{IN} =0V	I _{IB}		0.4	1	μA
Supply current	V _{IPK(SENSE)} =V _{CC} V _{PIN 5} >V _{FB} 5.0V≤V _{CC} ≤30V C _T =0.001μF, PIN 2=GND Remaining pins open	I _{CC}		1.6	3	mA




■ TYPICAL PERFORMANCE CHARACTERISTICS

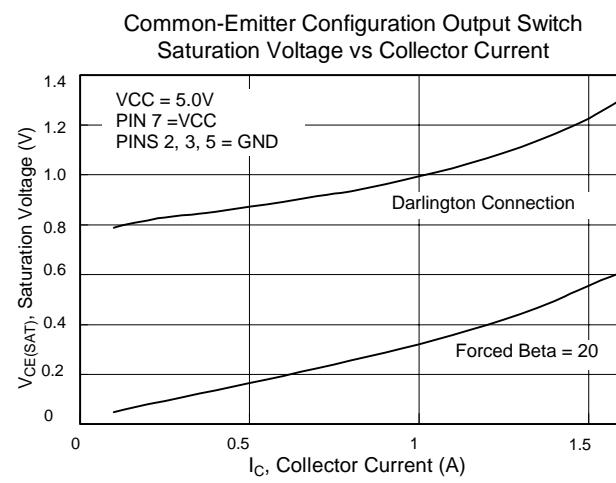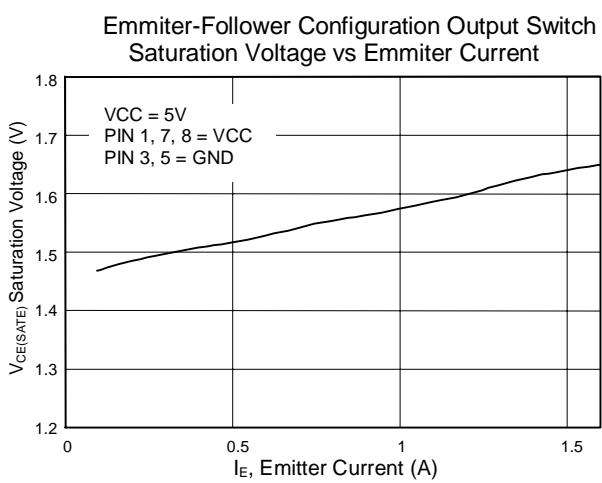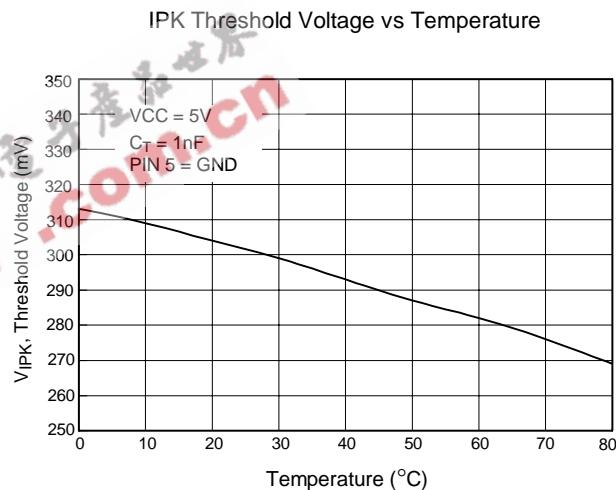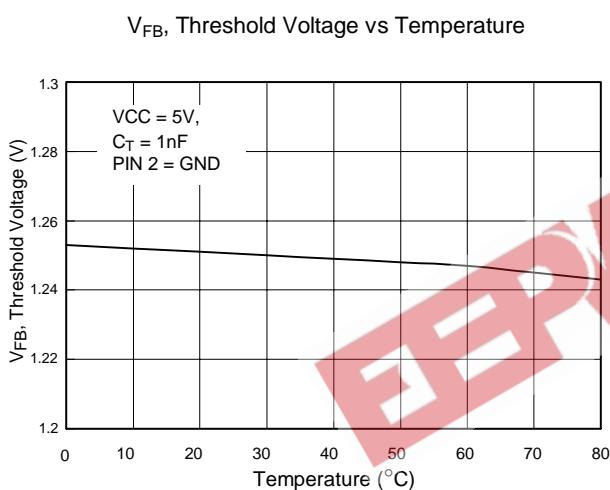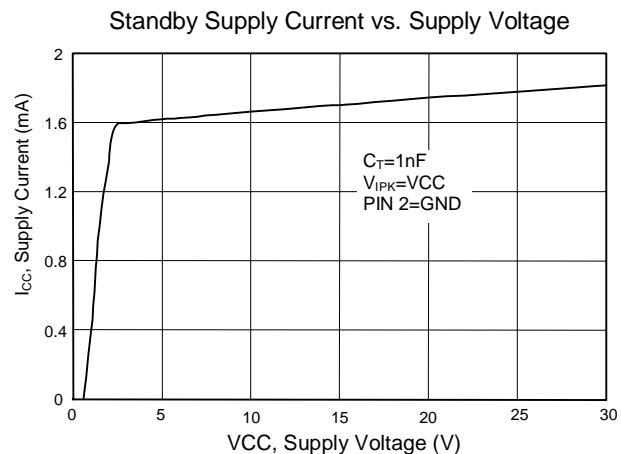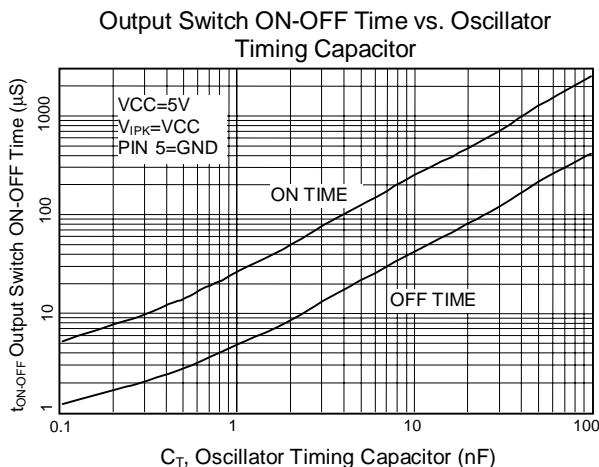



■ BLOCK DIAGRAM

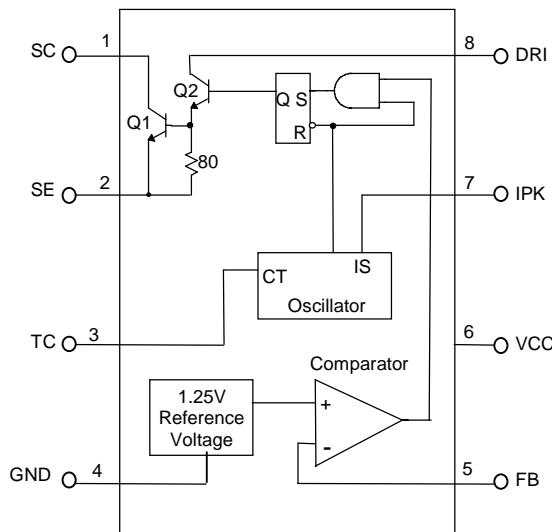

■ PIN DESCRIPTIONS

PIN 1: SC - 1.6A switch collector

PIN 2: SE - Darlington switch emitter

PIN 3: TC - Oscillator timing capacitor

PIN 4: GND - Power GND

PIN 5: FB - Feedback comparator inverting input

PIN 6: VCC - Power supply input

PIN 7: IPK - Highside current sense input,
VCC - V_{IPK}=300mV

PIN 8: DRI - Drive collector

■ APPLICATION INFORMATION

● DESIGN FORMULA TABLE

CALCULATION	STEP-DOWN	STEP-UP	VOLTAGE-INVERTING
$\frac{t_{ON}}{t_{OFF}}$	$\frac{V_{OUT} + V_F}{V_{IN(MIN)} - V_{SAT} - V_{OUT}}$	$\frac{V_{OUT} + V_F - V_{IN(MIN)}}{V_{IN(MIN)} - V_{SAT}}$	$\frac{ V_{OUT} + V_F}{V_{IN} - V_{SAT}}$
$(t_{ON} + t_{OFF})_{MAX}$	$\frac{1}{F_{MIN}}$	$\frac{1}{F_{MIN}}$	$\frac{1}{F_{MIN}}$
C_T	$4 \times 10^{-5} t_{ON}$	$4 \times 10^{-5} t_{ON}$	$4 \times 10^{-5} t_{ON}$
$I_{C(SWITCH)}$	$2I_{OUT(MAX)}$	$2I_{OUT(MAX)} \left(\frac{t_{ON} + t_{OFF}}{t_{OFF}} \right)$	$2I_{OUT(MAX)} \left(\frac{t_{ON} + t_{OFF}}{t_{OFF}} \right)$
R_S	$0.33/I_{C(SWITCH)}$	$0.33/I_{C(SWITCH)}$	$0.33/I_{C(SWITCH)}$
$L(MIN)$	$(\frac{V_{IN(MIN)} - V_{SAT} - V_{OUT}}{I_{C(SWITCH)}}) t_{ON(MAX)}$	$(\frac{V_{IN(MIN)} - V_{SAT}}{I_{C(SWITCH)}}) t_{ON(MAX)}$	$(\frac{V_{IN(MIN)} - V_{SAT}}{I_{C(SWITCH)}}) t_{ON(MAX)}$
C_O	$\frac{I_{C(SWITCH)} (t_{ON} + t_{OFF})}{8V_{RIPPLE(P-P)}}$	$\frac{I_{OUT} t_{ON}}{V_{RIPPLE(P-P)}}$	$\frac{I_{OUT} t_{ON}}{V_{RIPPLE(P-P)}}$



V_{SAT} = Saturation voltage of the output switch.
 V_F = Forward voltage drop of the ringback rectifier

The following power supply characteristics must be chosen:

V_{IN} - Nominal input voltage.
 V_{OUT} - Desired output voltage,
 $|V_{OUT}| = 1.25 (1 + RB/RA)$
 I_{OUT} - Desired output current.

F_{MIN} - Minimum desired output switching frequency at the selected values for V_{IN} and I_{OUT} .

$V_{RIPPLE\ (P-P)}$ - Desired peak-to-peak output ripple voltage. In practice, the calculated value will need to be increased due to the capacitor equivalent series resistance and board layout. The ripple voltage should be kept to a low value since it will directly effect the line and load regulation.

■ APPLICATION EXAMPLES

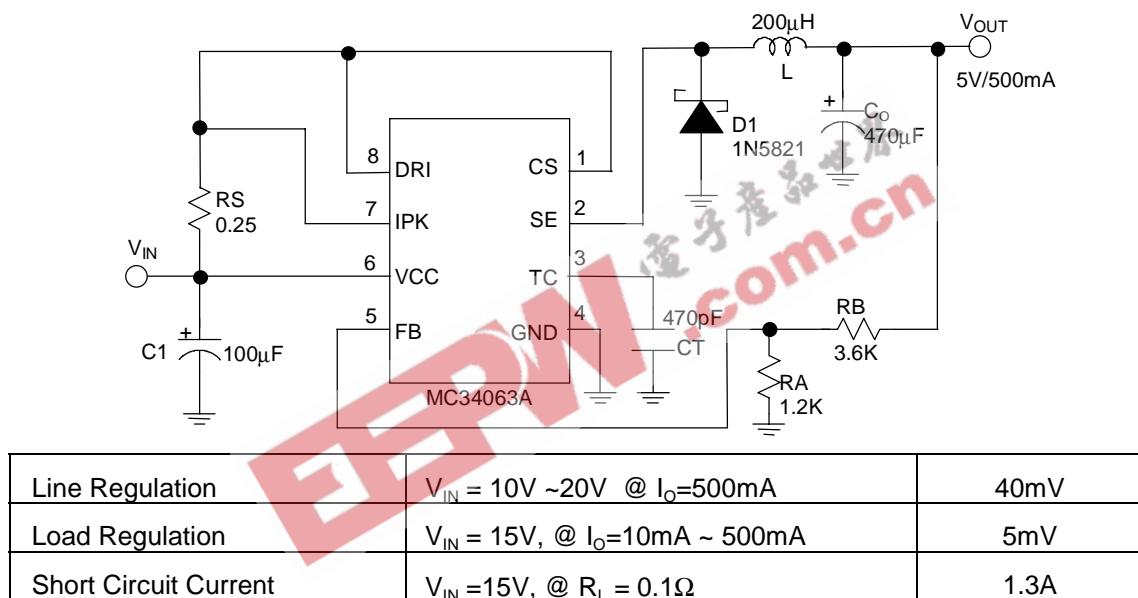


Fig. 1 Step-Down Converter


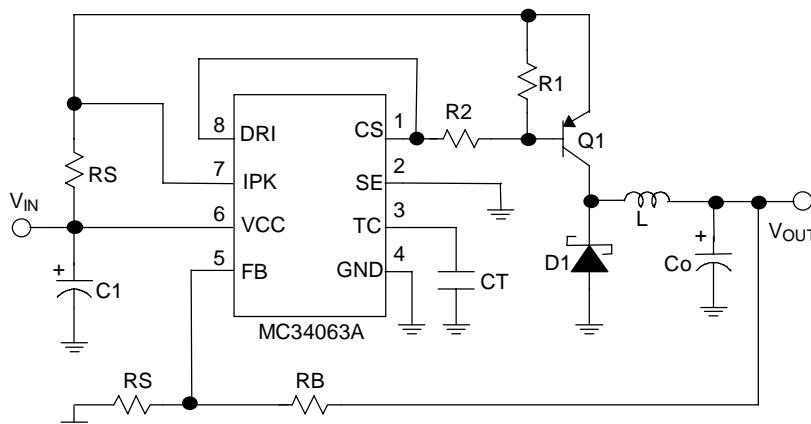


Fig. 2 Step-Down Converter with External PNP Saturation Switch



■ APPLICATION EXAMPLES (CONTINUED)

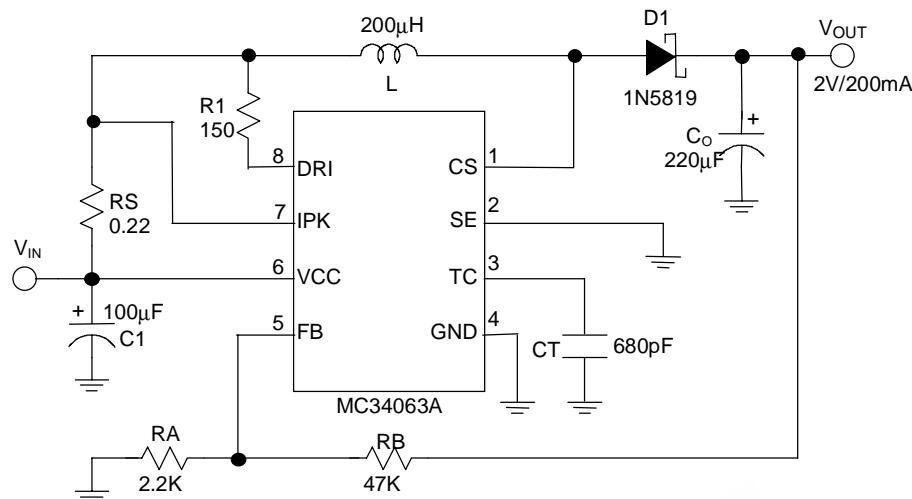

Line Regulation	V _{IN} = 8V ~16V @ I _O =200mA	100mV
Load Regulation	V _{IN} = 12V, @ I _O =80mA ~ 200mA	5mV

Fig. 3 Step-Up Converter


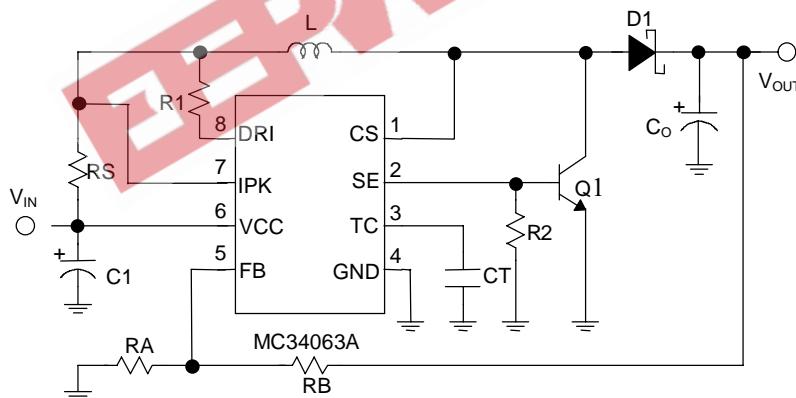


Fig. 4 Step-Up Converter with External NPN Switch



■ APPLICATION EXAMPLES (CONTINUED)

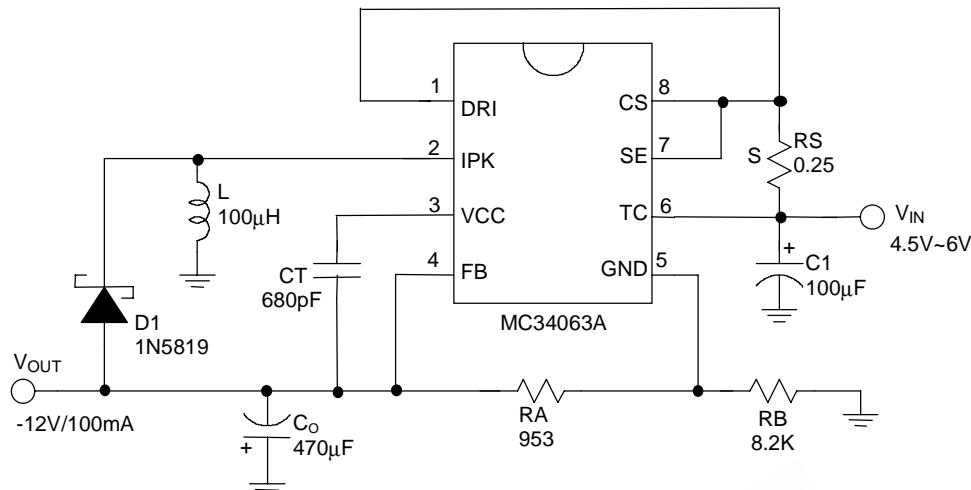

Line Regulation	$V_{IN} = 4.5V \sim 6V @ I_O=100mA$	20mV
Load Regulation	$V_{IN} = 5V, @ I_O=10mA \sim 100mA$	100mV

Fig.5 Inverting Converter


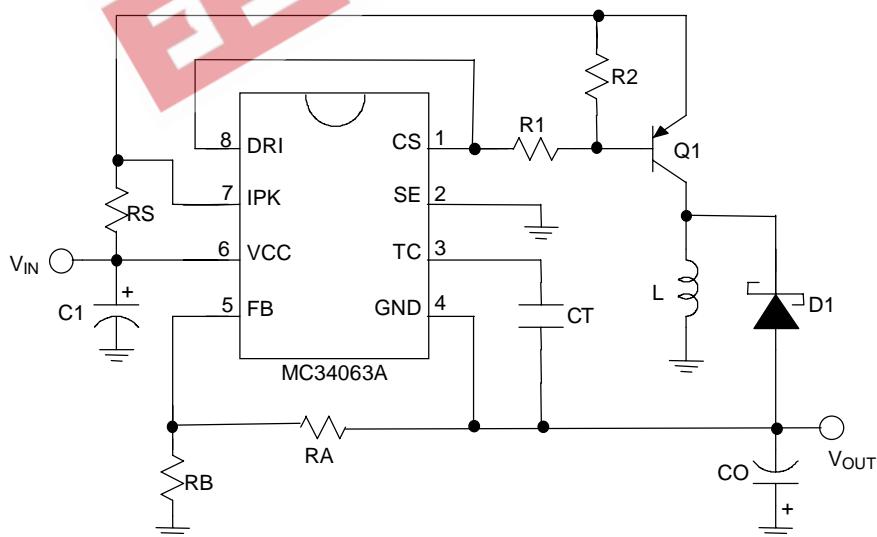


Fig 6. Voltage Inverting Converter With PNP Saturated Switch




■ PHYSICAL DIMENSIONS

- 8 LEAD PLASTIC SO (unit: mm)

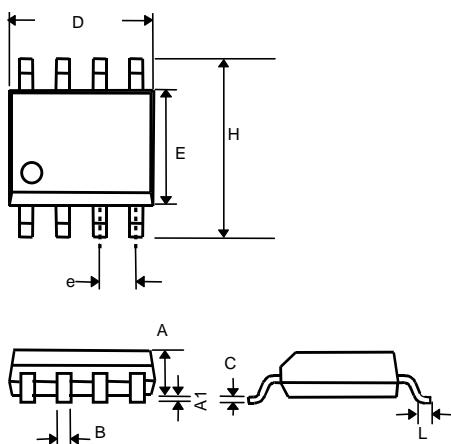

SYMBOL	MIN	MAX
A	1.35	1.75
A1	0.10	0.25
B	0.33	0.51
C	0.19	0.25
D	4.80	5.00
E	3.80	4.00
e	1.27(TYP)	
H	5.80	6.20
L	0.40	1.27

- 8 LEAD PLASTIC DIP (unit: mm)

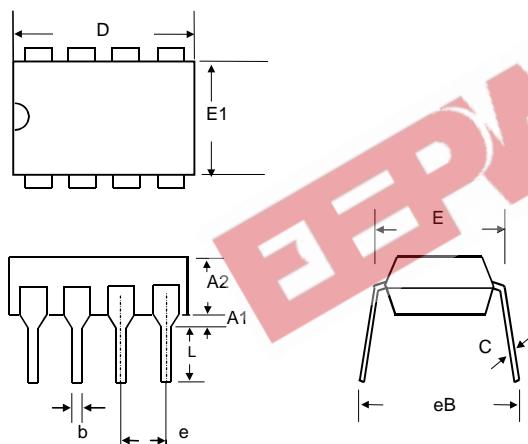

SYMBOL	MIN	MAX
A1	0.381	—
A2	2.92	4.96
b	0.35	0.56
C	0.20	0.36
D	9.01	10.16
E	7.62	8.26
E1	6.09	7.12
e	2.54 (TYP)	
eB	—	10.92
L	2.92	3.81