




# S1PDB174

## Single Phase Bridge Rectifiers Modules



Type	V <sub>RSM</sub> V	V <sub>RRM</sub> V
S1PDB174N08	900	800
S1PDB174N10	1100	1000
S1PDB174N12	1300	1200
S1PDB174N14	1500	1400
S1PDB174N16	1700	1600
S1PDB174N18	1900	1800

Dimensions in mm (1mm=0.0394")

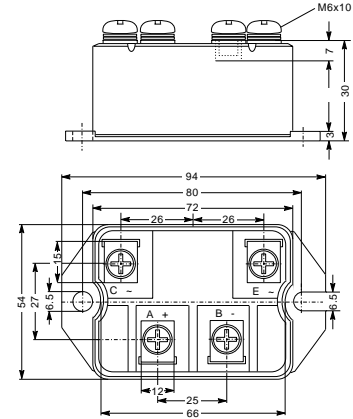

Symbol	Test Conditions	Maximum Ratings	Unit	
I <sub>dav</sub>	T <sub>C</sub> =100°C, module	174	A	
I <sub>dav</sub>	T <sub>A</sub> =35°C (R <sub>thCA</sub> =0.2K/W), module	139		
I <sub>FSM</sub>	T <sub>VJ</sub> =45°C V <sub>R</sub> =0 t=10ms (50Hz), sine	2800	A	
	T <sub>VJ</sub> =T <sub>VJM</sub> V <sub>R</sub> =0 t=8.3ms (60Hz), sine	3300		
I <sup>2</sup> t	T <sub>VJ</sub> =45°C V <sub>R</sub> =0 t=10ms (50Hz), sine	39200	A <sup>2</sup> s	
	T <sub>VJ</sub> =T <sub>VJM</sub> V <sub>R</sub> =0 t=8.3ms (60Hz), sine	45000		
T <sub>vj</sub> T <sub>vjm</sub> T <sub>stg</sub>		-40...+150		°C
		150		
V <sub>ISOL</sub>	50/60Hz, RMS I <sub>ISOL</sub> ≤1mA	-40...+125	V~	
	t=1min t=1s	2500 3000		
M <sub>d</sub>	Mounting torque (M6)	5 ± 15%	Nm	
	Terminal connection torque (M6)	5 ± 15%		
Weight	typ.	270	g	

# S1PDB174

## Single Phase Bridge Rectifiers Modules

Symbol	Test Conditions	Characteristic Values	Unit
$I_R$	$V_R=V_{RRM}; T_{VJ}=25^{\circ}\text{C}$ $V_R=V_{RRM}; T_{VJ}=T_{VJM}$	$\leq 0.3$ $\leq 5$	mA
$V_F$	$I_F=300\text{A}; T_{VJ}=25^{\circ}\text{C}$	$\leq 1.43$	V
$V_{TO}$	For power-loss calculations only	0.8	V
$r_T$	$T_{VJ}=T_{VJM}$	2.2	$\text{m}\Omega$
$R_{thJC}$	per diode; $180^{\circ}$ per module	0.45 0.11	K/W
$R_{thJK}$	per diode; $180^{\circ}$ per module	0.6 0.15	K/W
$d_s$	Creeping distance on surface	10	mm
$d_A$	Creepage distance in air	9.4	mm
$a$	Max. allowable acceleration	50	$\text{m/s}^2$

### FEATURES

- \* Package with screw terminals
- \* Isolation voltage 3000 V~
- \* Planar passivated chips
- \* Blocking voltage up to 1800 V
- \* Low forward voltage drop

### APPLICATIONS

- \* Supplies for DC power equipment
- \* Input rectifiers for PWM inverter
- \* Battery DC power supplies
- \* Field supply for DC motors

### ADVANTAGES

- \* Easy to mount with two screws
- \* Space and weight savings
- \* Improved temperature and power cycling