


VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,
USED, OR DISCLOSED IN WHOLE OR IN PART
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESC
03	REVSD & REDWN


ELECTRICAL CHARACTERISTICS

RATED VOLTAGE:	250 VAC, 50/60 Hz
CAPACITANCE TOLERANCE:	± 10%
DISSIPATION FACTOR:	< 1% MEASURED AT 1 KHZ
MAXIMUM PULSE RISE TIME:	ACCORDING TO VDE 0565 PART 1 du/dt 100V / μSEC
DIELECTRIC:	POLYESTER-FILM
TEST VOLTAGE:	(ELECTRODE/ELECTRODE) 1075 V-, 2 SEC. (SELF HEALINGS ARE ALLOWED TO OCCUR)
INSULATION RESISTANCE:	FOR C ≤ .33μF 15000 MEGOHM MINIMUM VALUE
COATING:	PLASTIC CAN, EPOXY RESIN SEALED, FLAME RETARDANT

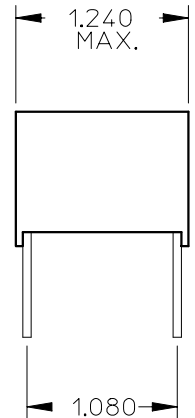

NOTES:

1. APPROVALS INCLUDE VDE, SEV, DEMKO, SEMKO, NEMKO, SETI, UL, IMQ, OVE.
2. LEADS ARE TINNED COPPER WIRE.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:	APPROVALS	DATE	
	DRAWN: <i>D.P. KELLY</i>	4/95	
FRACTIONS DECIMALS ANGLES ± 1/64 .XX ± .01 ± 1° .XXX ± .005			
THIRD ANGLE PROJECTION			
			
DO NOT SCALE DRAWING			
			SIZE FSCM N B 67 SCALE FULL