






### Pre-terminated Cables Simplify Connection of Terminal Blocks to PLC Modules

- Reduce setup time with cables pre-terminated for the exact PLC module in use
- No need to make custom connectors
- Crimp hook-terminated cables connect XW2B terminal blocks with PLC modules and input boards from any manufacturer



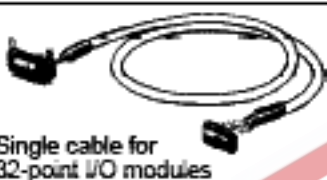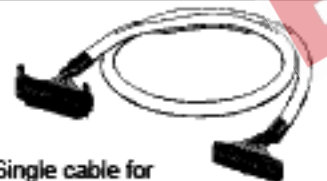

### Ordering Information

#### ■ CABLES

Appearance	Applicable terminal block	Cable length	Part number
 <p>Single cable for 32-point I/O modules</p>	XW2B-20G5 XW2B-20G4 XW2B-20G5-T XW2B-20G5-D XW2B-20G5-IN16	0.5 m (1.64 ft)	XW2Z-050A
		1 m (3.28 ft)	XW2Z-100A
		1.5 m (4.92 ft)	XW2Z-150A
		2 m (6.56 ft)	XW2Z-200A
		3 m (9.84 ft)	XW2Z-300A
		5 m (16.40 ft)	XW2Z-500A
 <p>Single cable for 32- and 64-point I/O modules</p>	XW2B-40G5 XW2B-40G4	0.5 m (1.64 ft)	XW2Z-050B
		1 m (3.28 ft)	XW2Z-100B
		1.5 m (4.92 ft)	XW2Z-150B
		2 m (6.56 ft)	XW2Z-200B
		3 m (9.84 ft)	XW2Z-300B
		5 m (16.40 ft)	XW2Z-500B
 <p>Single cable for CS1W high-density I/O modules</p>	XW2B-60G5 XW2B-60G4	1 m (3.28 ft)	XW2Z-100H-1
		2 m (6.56 ft)	XW2Z-200H-1
		3 m (9.84 ft)	XW2Z-300H-1
		5 m (16.40 ft)	XW2Z-500H-1
 <p>Bifurcated cable for 32- and 64-point I/O modules</p>	XW2C-20G5-IN16	1 m (3.28 ft) and 0.75 m (2.46 ft)	XW2Z-100D
		1.5 m (4.92 ft) and 1.25 m (4.10 ft)	XW2Z-150D
		2 m (6.56 ft) and 1.75 m (5.74 ft)	XW2Z-200D
		3 m (9.84 ft) and 2.75 m (9.02 ft)	XW2Z-300D
		5 m (16.40 ft) and 4.75 m (15.58 ft)	XW2Z-500D
 <p>Bifurcated cable for CS1W high-density I/O modules</p>	XW2B-40G5 and XW2B-20G5	1 m (3.28 ft) and 1 m (3.28 ft)	XW2Z-100H-2
		2 m (6.56 ft) and 2 m (6.56 ft)	XW2Z-200H-2
		3 m (9.84 ft) and 3 m (6.56 ft)	XW2Z-300H-2
		5 m (16.40 ft) and 5 m (16.40 ft)	XW2Z-500H-2

## Cables (continued)

Appearance	Applicable terminal block	Cable length	Part number
 Three-connector cable for 48- and 96-point I/O modules	Three XW2B-20G5	1 m (3.28 ft) and 0.75 m (2.45 ft) and 1 m (3.28 ft)	XW2Z-100H-3
		2 m (6.56 ft) and 1.75 m (5.74 ft) and 2 m (6.56 ft)	XW2Z-200H-3
		3 m (9.84 ft) and 2.75 m (9.02 ft) and 3 m (9.84 ft)	XW2Z-300H-3
		5 m (16.40 ft) and 4.75 m (15.58 ft) and 5 m (16.40 ft)	XW2Z-500H-3
 Single cable terminated with crimp hooks	XW2B-20G5 XW2B-20G4	1 m (3.28 ft)	XW2Z-100F
		1.5 m (4.92 ft)	XW2Z-150F
		2 m (6.56 ft)	XW2Z-200F
		3 m (9.84 ft)	XW2Z-300F
		5 m (16.40 ft)	XW2Z-500F

## Specifications

## ■ RATINGS/CHARACTERISTICS

Item	Rating
Rated current	1 A at 20°C (68°F)
Rated voltage	125 VAC
Contact resistance	20 mΩ max. with 100 mA at 20 mV max. (See Note 1)
Insulation resistance	100 MΩ min. at 500 VDC
Dielectric strength	500 VAC for 1 minute with a current leakage of 1 mA max. (See Note 2)
Enclosure rating	IP00
Electrical protection	Class 0
Ambient temperature	Operating: -25°C to 80°C (-13°F to 176°F)

Note: 1. The resistance indicated is the contact resistance of the connector.

2. The voltage indicated is the dielectric strength of the connector.

## ■ MATERIALS/FINISH


Item	Parts	Materials/Processing		
Connector	XG4M-2030 XG4M-4030 XG4M-6030	Housing	Black PBT resin with glass (UL94V-0)	
		Cover		
		Contact		Contact-carrying portion: Phosphor bronze and nickel plated with 0.15-μm-thick gold Press-fit portion: Phosphor bronze and nickel plated with 2.0-μm-thick tin
	XG4T-2004 XG4T-4004 XG4T-6004	Strain relief	Black PBT resin with glass (UL94V-0)	
		FCN-387J024-AU/F FCN-387J040-AU/F	Housing	Black PBT resin (UL94V-0)
			Contact	Contact-carrying portion: Gold-plated phosphor bronze Press-fit portion: Tin-plated phosphor bronze
		Screw	Nickel-plated steel	
Cable	UL2464 interface cable	Equivalent to AWG28		
Crimp terminal	Fork-type crimp terminal	Equivalent to 1.25YAS3.5		

# Dimensions

Unit: mm (inch)


## ■ XW2Z-□□□A FOR 32-POINT PLC I/O MODULES (CONNECTOR TYPE)

The G79-□C Cable with a connector for the G7TC cannot be used for the XW2C due to a difference in wiring. The G79-□C Cable can be used for some of the XW2B Screw Terminal Blocks, refer to the XW2B data sheet.

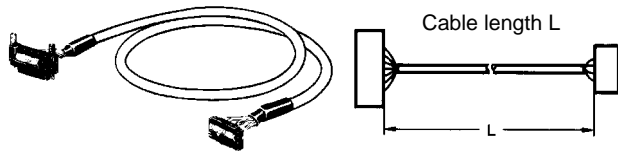

Part number	Cable length L
XW2Z-050A	0.5 m (1.64 ft)
XW2Z-100A	1 m (3.28 ft)
XW2Z-150A	1.5 m (4.92 ft)
XW2Z-200A	2 m (6.56 ft)
XW2Z-300A	3 m (9.84 ft)
XW2Z-500A	5 m (16.40 ft)

## Wiring Diagram

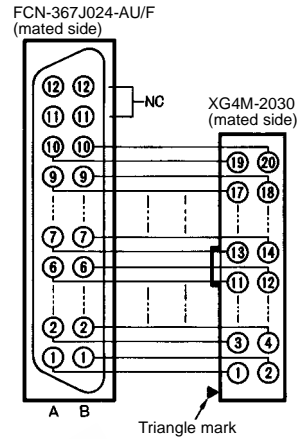



## Combinations of Omron PLC I/O Modules and Screw Terminal Blocks

PLC I/O module	I/O points	Terminal block	Dedicated cable
C200H-ID215 C200H-OD215 C200H-MD215 C200H-MD115 C200H-MD501 C200H-ID501 C200H-OD501 C500-ID218CN C500-ID501CN C500-OD415CN C500-MD211CN C500-OD501CN	32 points input 32 points output 16 points in/16 points out 16 points in/16 points out 16 points in/16 points out 32 points input 32 points output 32 points input 32 points input 32 points output 16 points in/16 points out 32 points output	XW2B-20G5 XW2B-20G4 XW2B-40G5-T XW2B-20G5-D	XW2Z-□□□A
C200H-ID215 C200H-ID501 C500-ID218CN C500-ID501CN C200H-MD215 C200H-MD115 C200H-MD501 C500-MD211CN	32 points input 32 points input 32 points input 32 points input 16 points in/16 points out 16 points in/16 points out 16 points in/16 points out 16 points in/16 points out	XW2C-20G5-IN16 (See Note 3)	


- Note: 1. The G79-□C Cable with a connector for the G7TC cannot be used for the XW2C due to a difference in wiring. The G79-□C Cable can be used for some of the XW2B Screw Terminal Blocks, refer to the XW2B data sheet.
2. The Input or Output Modules above have two connectors, so each one can use up to two Terminal Blocks and two dedicated cables.
3. The XW2C is a dedicated Input Terminal Block. If the XW2C is connected to a PLC module that handles both input and output signals (modules with "MD" in the part number), only the input portion of the PLC module can be used.

Unit: mm (inch)

■ XW2Z-□□□B FOR 32-POINT AND 64-POINT PLC I/O MODULES (CONNECTOR TYPE)

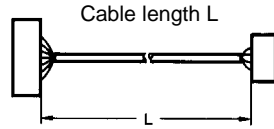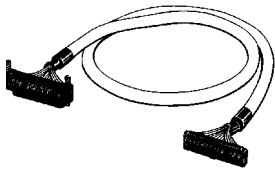

Wiring Diagram

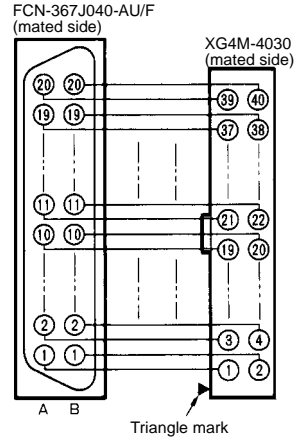


Part number	Cable length L
XW2Z-050B	0.5 m (1.64 ft)
XW2Z-100B	1 m (3.28 ft)
XW2Z-150B	1.5 m (4.92 ft)
XW2Z-200B	2 m (6.56 ft)
XW2Z-300B	3 m (9.84 ft)
XW2Z-500B	5 m (16.40 ft)

Combinations of Omron PLC I/O Modules and Screw Terminal Blocks

PLC I/O module	I/O points	Terminal block	Dedicated cable
CQM1-ID213 CQM1-OD213 C200H-ID216 C200H-OD218 C200H-OD21B	32 points	XW2B-40G5 XW2B-40G4	XW2Z-□□□B
C200H-ID111 C200H-ID217 C200H-OD219 C500-ID114 3G2A5-ID219 3G2A5-OD213	64 points		

Note: 32-point I/O modules use one Terminal Block and one dedicated cable.  
64-point I/O modules use two Terminal Blocks and two dedicated cables.


■ XW2Z-□□□D FOR 32-POINT AND 64-POINT PLC I/O MODULES (CONNECTOR TYPE)

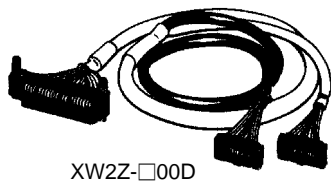



XW2Z-□□□D

Part number	Cable length A	Cable length B
XW2Z-100D	1 m (3.28 ft)	0.75 m (2.46 ft)
XW2Z-150D	1.5 m (4.92 ft)	1.25 m (4.10 ft)
XW2Z-200D	2 m (6.56 ft)	1.75 m (5.74 ft)
XW2Z-300D	3 m (9.84 ft)	2.75 m (9.02 ft)
XW2Z-500D	5 m (16.40 ft)	4.75 m (15.58 ft)

- Note: 1. CN2 (black cable side) is wired to line A of CN1 and CN3 (yellow cable side) is wired to line B of CN1.  
 2. The G79-□C Cable for the G7TC Terminal Block cannot be used for the XW2C due to a difference in wiring.

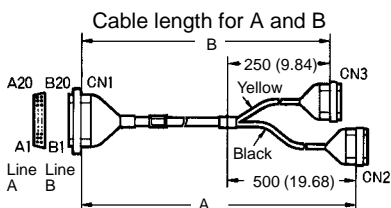

Wiring Diagram

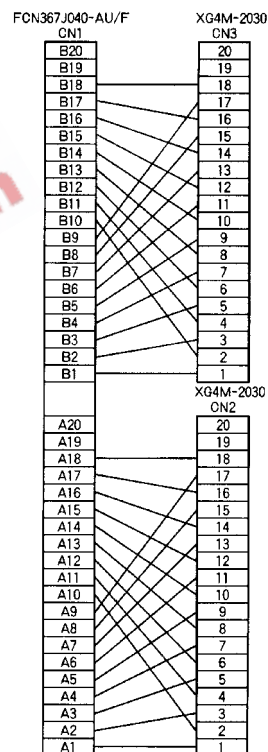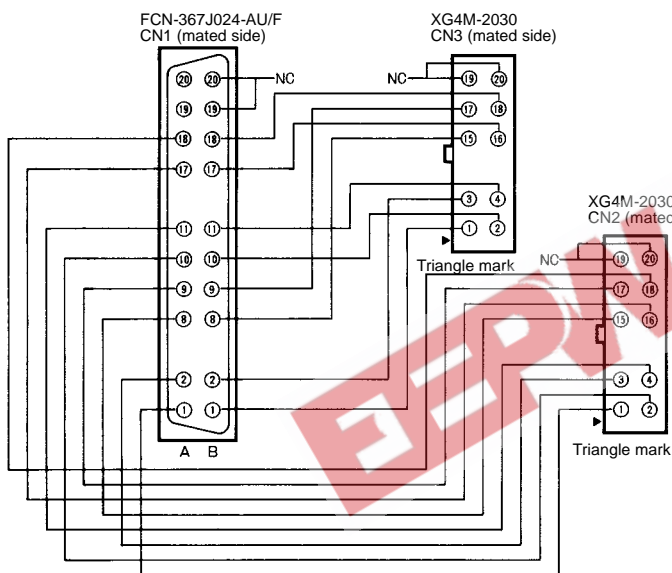


Combinations of Omron PLC I/O Modules and Screw Terminal Blocks


PLC I/O module	I/O points	Terminal block	Dedicated cable
CQM1-ID213 C200H-ID216	32 points	Two XW2C-20GS-IN16 input blocks	One XW2Z-□□□D cable
C200H-ID217 C500-ID114 3G2A5-ID219	64 points	Four XW2C-20GS-IN16 input blocks	Two XW2Z-□□□D cables

Unit: mm (inch)


■ XW2Z-□□□H-□ FOR 96-POINT CS1 PLC I/O MODULES (CONNECTOR TYPE)

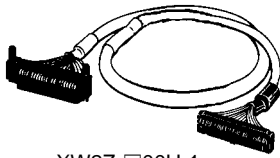




XW2Z-□□□H-1

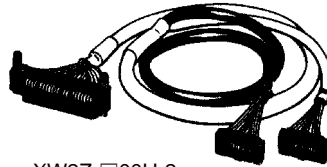

XW2Z-□□□H-2

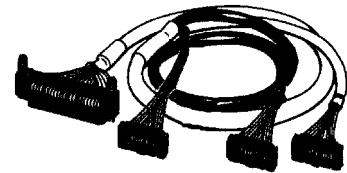

XW2Z-□□□H-3

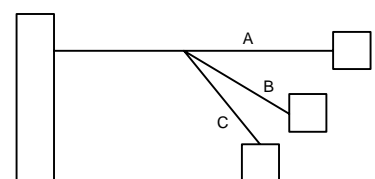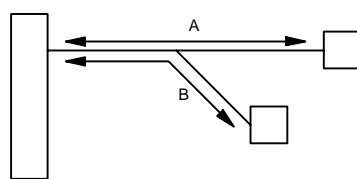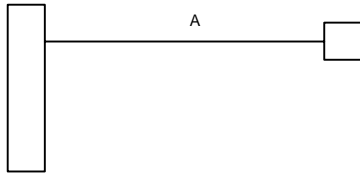

Part number	Cable length A
XW2Z-100H-1	1 m (3.28 ft)
XW2Z-200H-1	2 m (6.56 ft)
XW2Z-300H-1	3 m (9.84 ft)
XW2Z-500H-1	5 m (16.40 ft)

Part number	Cable length		
	A	B	C
XW2Z-100H-3	1 m (3.28 ft)	0.75 ft (2.45 ft)	1 m (3.28 ft)
XW2Z-200H-3	2 m (6.56 ft)	1.75 ft (5.74 ft)	2 m (6.56 ft)
XW2Z-300H-3	3 m (9.84 ft)	2.75 ft (9.02 ft)	3 m (9.84 ft)
XW2Z-500H-3	5 m (16.40 ft)	4.75 ft (15.58 ft)	5 m (16.40 ft)



Part number	Cable length A	Cable length B
XW2Z-100H-2	1 m (3.28 ft)	1 m (3.28 ft)
XW2Z-200H-2	2 m (6.56 ft)	2 m (6.56 ft)
XW2Z-300H-2	3 m (9.84 ft)	3 m (9.84 ft)
XW2Z-500H-2	5 m (16.40 ft)	5 m (16.40 ft)

Combinations of Omron PLC I/O Modules and Screw Terminal Blocks


PLC I/O module	I/O points	Terminal blocks	Dedicated cable
CS1W-ID291, CS1W-OD291, CS1W-OD292 CS1W-MD291, CS1W-MD292	96 points	Two XW2B-60G□ terminal blocks	Two XW2Z-□□□H-1 cables
CS1W-ID291, CS1W-OD291, CS1W-OD292 CS1W-MD291, CS1W-MD292	96 points	Two XW2B-40G4 + XW2B-20G4 or two XW2B-40G5 + XW2B-20G5 terminal blocks	Two XW2Z-□□□H-2 cables
CS1W-ID291, CS1W-OD291, CS1W-OD292 CS1W-MD291, CS1W-MD292	96 points	Six XW2B-20G4 or six XW2B-20G5 terminal blocks	Two XW2Z-□□□H-3 cables

Note: For detailed information about connector pin-outs, refer to CS1 Operation Manual (W339), Appendix A.

■ XW2Z-□□□F CABLE WITH CRIMP TERMINALS (20 POLES)

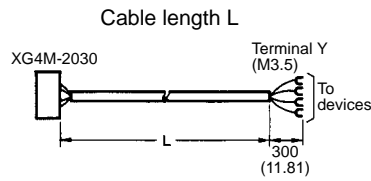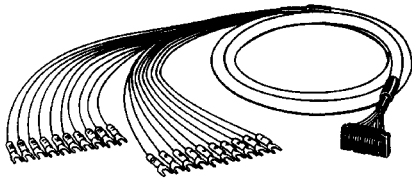

Wiring Diagram

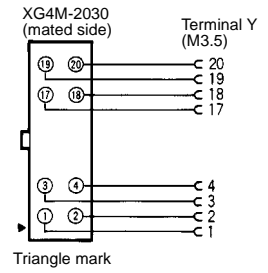










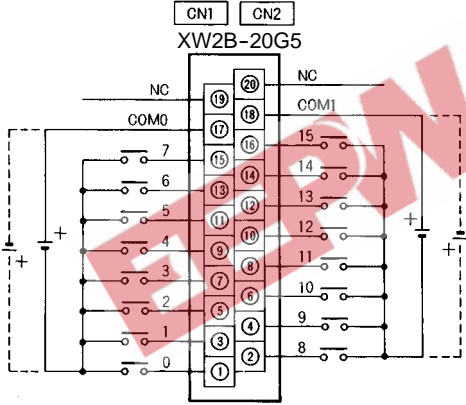
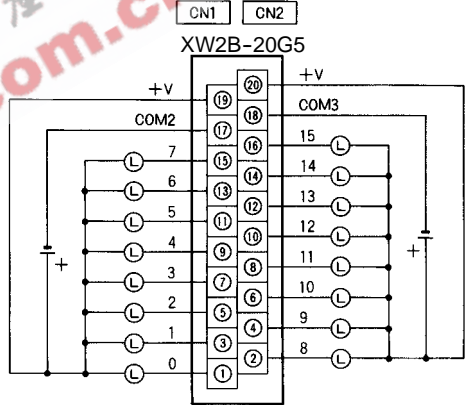
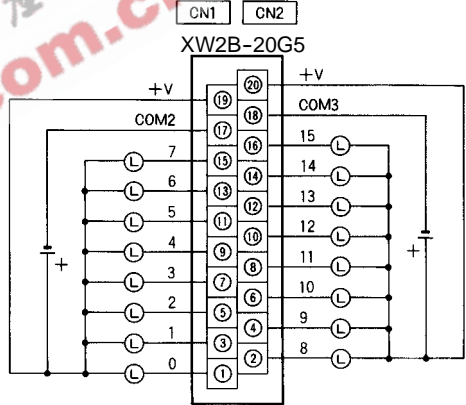
Part number	Cable length L
XW2Z-100F	1 m (3.28 ft)
XW2Z-150F	1.5 m (4.92 ft)
XW2Z-200F	2 m (6.56 ft)
XW2Z-300F	3 m (9.84 ft)
XW2Z-500F	5 m (16.40 ft)

Combinations of Omron PLC I/O Modules and Screw Terminal Blocks





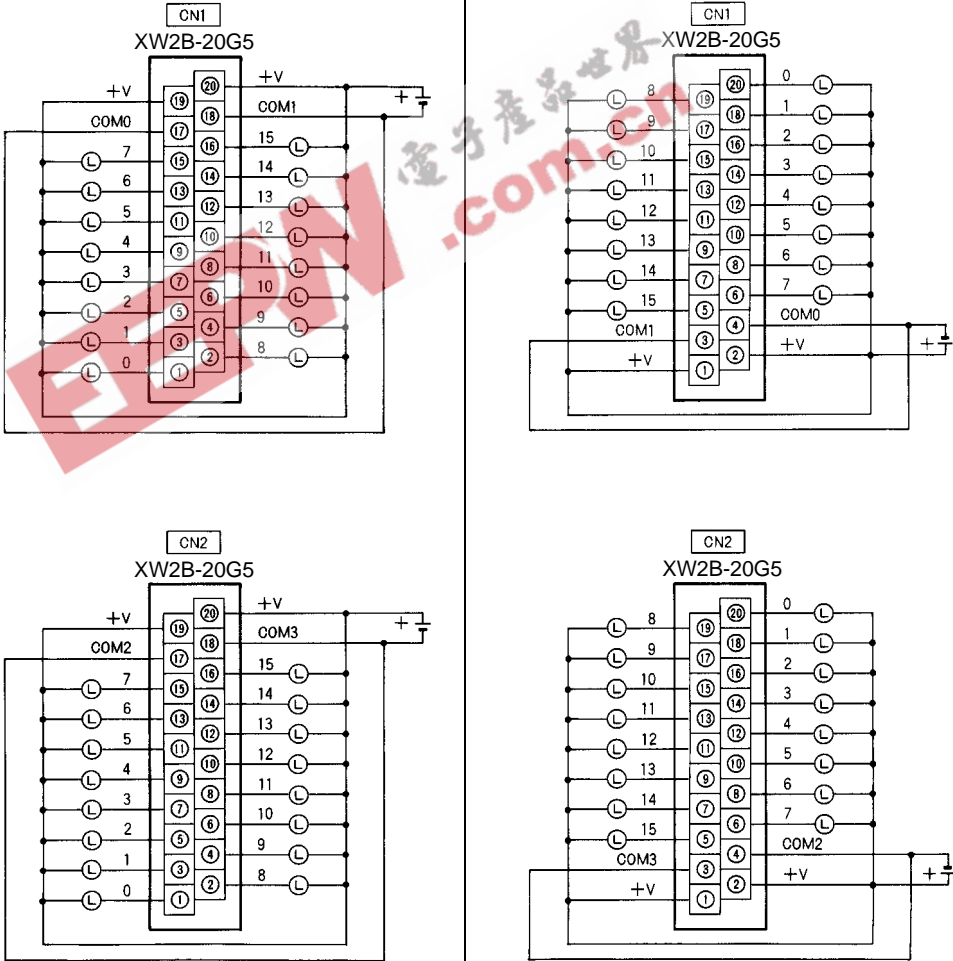
PLC I/O module	Terminal block	Dedicated cable
Use any I/O module with a terminal block from Omron or another manufacturer, or an I/O board for a computer.	XW2B-20G5 XW2B-20G4	XW2Z-□□□F









# Installation





## ■ CONNECTIONS BETWEEN OMRON'S I/O MODULES AND SCREW TERMINAL BLOCKS





Item	Input (ID)	Output (OD)
PLC I/O modules	 <p>                         C200H-ID215                          C200H-ID501                          C500-ID501CN                          C500-ID218CN                     </p> <p>32-point input modules use two blocks and two cables.</p>	 <p>                         C200H-OD215                          C200H-OD501                          C500-OD501CN                     </p> <p>32-point output modules use two blocks and two cables.</p>
Terminal blocks	 <p>                         XW2B-20G5                          XW2B-20G4                     </p>	 <p>                         XW2B-20G5                          XW2B-20G4                     </p>
Cable	 <p>XW2Z-□□□A</p>	 <p>XW2Z-□□□A</p>
Connection diagram	 <p>                         CN1 CN2                          XW2B-20G5                     </p>	 <p>                         CN1 CN2                          XW2B-20G5                     </p>
Cable	 <p>G79-□C</p>	 <p>G79-□C</p>
Connection diagram	 <p>                         CN1 CN2                          XW2B-20G5                     </p>	 <p>                         CN1 CN2                          XW2B-20G5                     </p>






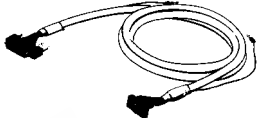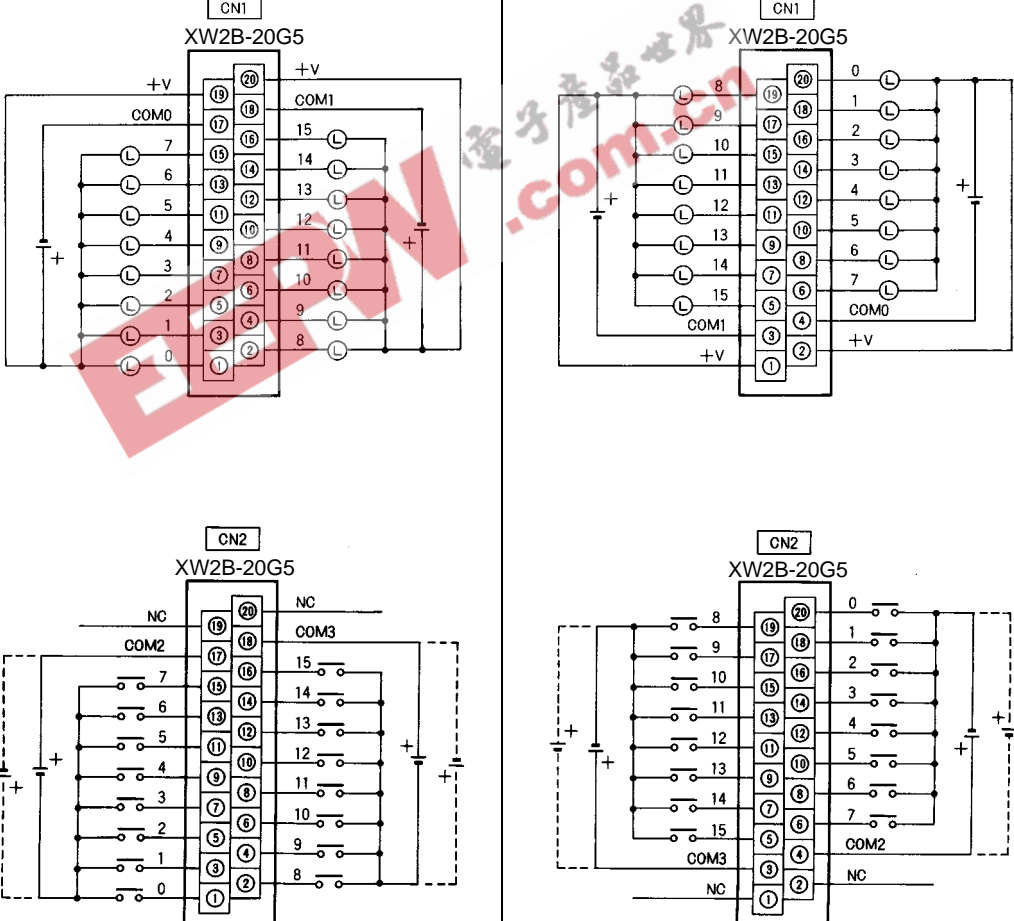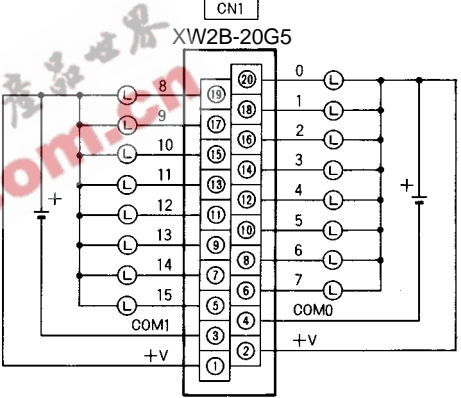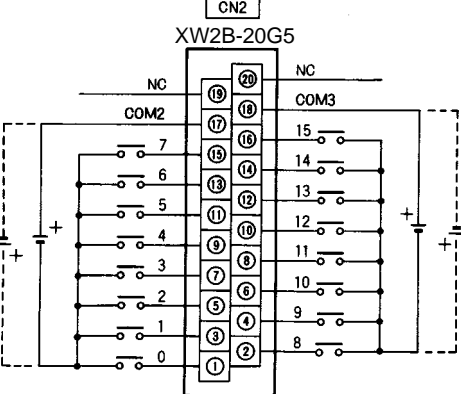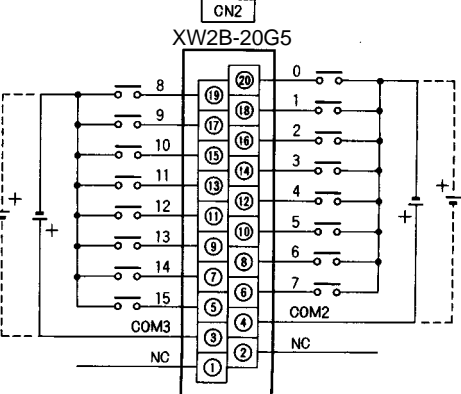

Item	Output (OD)	
PLC I/O module	 <p>C500-OD415CN 32-point output module uses two blocks and two cables.</p>	
Terminal block	 <p>XW2B-20G5 XW2B-20G4</p>	
Cable	 <p>XW2Z-□□□A</p>	 <p>G79-□C</p>
Connection diagram	 <p>The connection diagrams show the wiring for two blocks of the XW2B-20G5 terminal block. The top diagrams use CN1, and the bottom diagrams use CN2. Each diagram shows 16 channels (0-15) with terminals for +V, COM, and L. The wiring patterns are as follows:</p> <ul style="list-style-type: none"> <li><b>Top Left (CN1):</b> COM0 is connected to terminal 19 (+V), COM1 to terminal 20 (+V). Channel 0: L0 to 1, COM0 to 2, +V to 3. Channel 1: L1 to 2, COM0 to 3, +V to 4. Channel 2: L2 to 3, COM0 to 4, +V to 5. Channel 3: L3 to 4, COM0 to 5, +V to 6. Channel 4: L4 to 5, COM0 to 6, +V to 7. Channel 5: L5 to 6, COM0 to 7, +V to 8. Channel 6: L6 to 7, COM0 to 8, +V to 9. Channel 7: L7 to 8, COM0 to 9, +V to 10. Channel 8: L8 to 9, COM0 to 10, +V to 11. Channel 9: L9 to 10, COM0 to 11, +V to 12. Channel 10: L10 to 11, COM0 to 12, +V to 13. Channel 11: L11 to 12, COM0 to 13, +V to 14. Channel 12: L12 to 13, COM0 to 14, +V to 15. Channel 13: L13 to 14, COM0 to 15, +V to 16. Channel 14: L14 to 15, COM0 to 16, +V to 17. Channel 15: L15 to 16, COM0 to 17, +V to 18.</li> <li><b>Top Right (CN1):</b> COM1 is connected to terminal 19 (+V), COM0 to terminal 20 (+V). Channel 0: L0 to 1, COM1 to 2, +V to 3. Channel 1: L1 to 2, COM1 to 3, +V to 4. Channel 2: L2 to 3, COM1 to 4, +V to 5. Channel 3: L3 to 4, COM1 to 5, +V to 6. Channel 4: L4 to 5, COM1 to 6, +V to 7. Channel 5: L5 to 6, COM1 to 7, +V to 8. Channel 6: L6 to 7, COM1 to 8, +V to 9. Channel 7: L7 to 8, COM1 to 9, +V to 10. Channel 8: L8 to 9, COM1 to 10, +V to 11. Channel 9: L9 to 10, COM1 to 11, +V to 12. Channel 10: L10 to 11, COM1 to 12, +V to 13. Channel 11: L11 to 12, COM1 to 13, +V to 14. Channel 12: L12 to 13, COM1 to 14, +V to 15. Channel 13: L13 to 14, COM1 to 15, +V to 16. Channel 14: L14 to 15, COM1 to 16, +V to 17. Channel 15: L15 to 16, COM1 to 17, +V to 18.</li> <li><b>Bottom Left (CN2):</b> COM2 is connected to terminal 19 (+V), COM3 to terminal 20 (+V). Channel 0: L0 to 1, COM2 to 2, +V to 3. Channel 1: L1 to 2, COM2 to 3, +V to 4. Channel 2: L2 to 3, COM2 to 4, +V to 5. Channel 3: L3 to 4, COM2 to 5, +V to 6. Channel 4: L4 to 5, COM2 to 6, +V to 7. Channel 5: L5 to 6, COM2 to 7, +V to 8. Channel 6: L6 to 7, COM2 to 8, +V to 9. Channel 7: L7 to 8, COM2 to 9, +V to 10. Channel 8: L8 to 9, COM2 to 10, +V to 11. Channel 9: L9 to 10, COM2 to 11, +V to 12. Channel 10: L10 to 11, COM2 to 12, +V to 13. Channel 11: L11 to 12, COM2 to 13, +V to 14. Channel 12: L12 to 13, COM2 to 14, +V to 15. Channel 13: L13 to 14, COM2 to 15, +V to 16. Channel 14: L14 to 15, COM2 to 16, +V to 17. Channel 15: L15 to 16, COM2 to 17, +V to 18.</li> <li><b>Bottom Right (CN2):</b> COM3 is connected to terminal 19 (+V), COM2 to terminal 20 (+V). Channel 0: L0 to 1, COM3 to 2, +V to 3. Channel 1: L1 to 2, COM3 to 3, +V to 4. Channel 2: L2 to 3, COM3 to 4, +V to 5. Channel 3: L3 to 4, COM3 to 5, +V to 6. Channel 4: L4 to 5, COM3 to 6, +V to 7. Channel 5: L5 to 6, COM3 to 7, +V to 8. Channel 6: L6 to 7, COM3 to 8, +V to 9. Channel 7: L7 to 8, COM3 to 9, +V to 10. Channel 8: L8 to 9, COM3 to 10, +V to 11. Channel 9: L9 to 10, COM3 to 11, +V to 12. Channel 10: L10 to 11, COM3 to 12, +V to 13. Channel 11: L11 to 12, COM3 to 13, +V to 14. Channel 12: L12 to 13, COM3 to 14, +V to 15. Channel 13: L13 to 14, COM3 to 15, +V to 16. Channel 14: L14 to 15, COM3 to 16, +V to 17. Channel 15: L15 to 16, COM3 to 17, +V to 18.</li> </ul>	

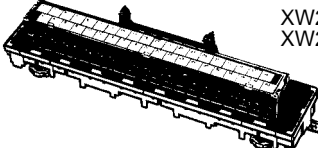
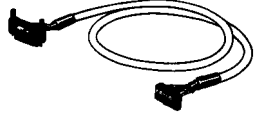
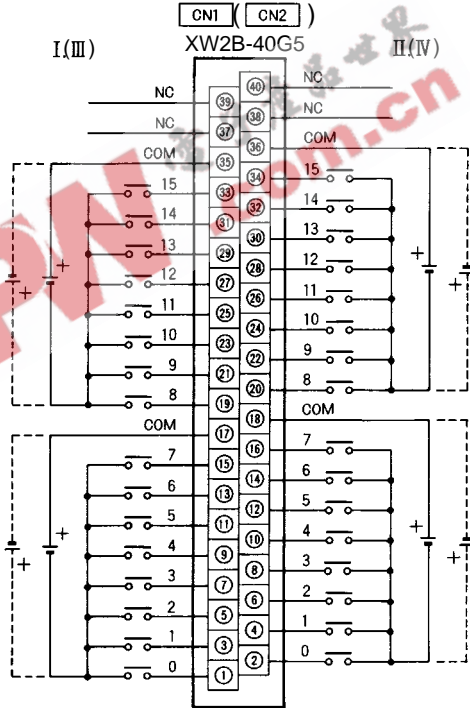

Item	Mixed I/O (MD)	
PLC I/O modules	<div style="display: flex; align-items: center;">  <div> <p>C200H-MD115 C200H-MD215 C200H-MD501 C500-MD211CN</p> <p>16-point input/16-point output mixed I/O modules use two blocks and two cables.</p> </div> </div>	
Terminal blocks	<div style="display: flex; align-items: center;">  <div> <p>XW2B-20G5 XW2B-20G4</p> </div> </div>	
Cable	 <p>XW2Z-□□□A</p>	 <p>G79-□C</p>
Connection diagram	<div style="display: flex; justify-content: space-around;"> <div style="width: 45%;">  </div> <div style="width: 45%;">  </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 20px;"> <div style="width: 45%;">  </div> <div style="width: 45%;">  </div> </div>	

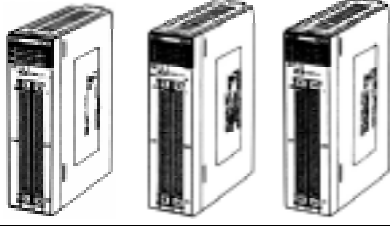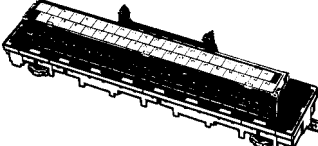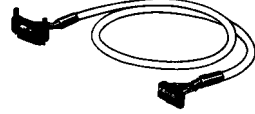Item	Group 2 High-density Input/Output																											
PLC I/O module	 <table border="0"> <tr> <td>CQM1-ID213</td> <td>32-point</td> <td>Use one terminal block and one cable.</td> </tr> <tr> <td>C200H-ID216</td> <td>32-point</td> <td>Use one terminal block and one cable.</td> </tr> <tr> <td>C200H-ID111</td> <td>64-point</td> <td>Use two terminal blocks and two cables.</td> </tr> <tr> <td>C200H-ID217</td> <td>64-point</td> <td>Use two terminal blocks and two cables.</td> </tr> <tr> <td>C500-ID114</td> <td>64-point</td> <td>Use two terminal blocks and two cables.</td> </tr> <tr> <td>3G2A5-ID219</td> <td>64-point</td> <td>Use two terminal blocks and two cables.</td> </tr> <tr> <td>CQM1-OD213</td> <td>32-point</td> <td>Use one terminal block and one cable.</td> </tr> <tr> <td>C200H-OD218</td> <td>32-point</td> <td>Use one terminal block and one cable.</td> </tr> <tr> <td>C200H-OD219</td> <td>64-point</td> <td>Use two terminal blocks and two cables.</td> </tr> </table>	CQM1-ID213	32-point	Use one terminal block and one cable.	C200H-ID216	32-point	Use one terminal block and one cable.	C200H-ID111	64-point	Use two terminal blocks and two cables.	C200H-ID217	64-point	Use two terminal blocks and two cables.	C500-ID114	64-point	Use two terminal blocks and two cables.	3G2A5-ID219	64-point	Use two terminal blocks and two cables.	CQM1-OD213	32-point	Use one terminal block and one cable.	C200H-OD218	32-point	Use one terminal block and one cable.	C200H-OD219	64-point	Use two terminal blocks and two cables.
CQM1-ID213	32-point	Use one terminal block and one cable.																										
C200H-ID216	32-point	Use one terminal block and one cable.																										
C200H-ID111	64-point	Use two terminal blocks and two cables.																										
C200H-ID217	64-point	Use two terminal blocks and two cables.																										
C500-ID114	64-point	Use two terminal blocks and two cables.																										
3G2A5-ID219	64-point	Use two terminal blocks and two cables.																										
CQM1-OD213	32-point	Use one terminal block and one cable.																										
C200H-OD218	32-point	Use one terminal block and one cable.																										
C200H-OD219	64-point	Use two terminal blocks and two cables.																										
Terminal block	 <p>XW2B-40G5 XW2B-40G4</p>																											
Cable	 <p>XW2Z-□□□B</p>																											
Connection diagram	 <p>The diagram shows the XW2B-40G5 terminal block with two connector headers: CN1 (left) and CN2 (right). The terminal numbers are 1 through 40. The connections are as follows:</p> <ul style="list-style-type: none"> <li><b>Terminal 1:</b> COM</li> <li><b>Terminal 2:</b> 1</li> <li><b>Terminal 3:</b> 2</li> <li><b>Terminal 4:</b> 3</li> <li><b>Terminal 5:</b> 4</li> <li><b>Terminal 6:</b> 5</li> <li><b>Terminal 7:</b> 6</li> <li><b>Terminal 8:</b> 8</li> <li><b>Terminal 9:</b> 9</li> <li><b>Terminal 10:</b> 10</li> <li><b>Terminal 11:</b> 11</li> <li><b>Terminal 12:</b> 12</li> <li><b>Terminal 13:</b> 13</li> <li><b>Terminal 14:</b> 14</li> <li><b>Terminal 15:</b> 15</li> <li><b>Terminal 16:</b> COM</li> <li><b>Terminal 17:</b> COM</li> <li><b>Terminal 18:</b> 16</li> <li><b>Terminal 19:</b> 17</li> <li><b>Terminal 20:</b> 18</li> <li><b>Terminal 21:</b> 19</li> <li><b>Terminal 22:</b> 20</li> <li><b>Terminal 23:</b> 21</li> <li><b>Terminal 24:</b> 22</li> <li><b>Terminal 25:</b> 23</li> <li><b>Terminal 26:</b> 24</li> <li><b>Terminal 27:</b> 25</li> <li><b>Terminal 28:</b> 26</li> <li><b>Terminal 29:</b> 27</li> <li><b>Terminal 30:</b> 28</li> <li><b>Terminal 31:</b> 29</li> <li><b>Terminal 32:</b> 30</li> <li><b>Terminal 33:</b> 31</li> <li><b>Terminal 34:</b> 32</li> <li><b>Terminal 35:</b> 33</li> <li><b>Terminal 36:</b> 34</li> <li><b>Terminal 37:</b> 35</li> <li><b>Terminal 38:</b> 36</li> <li><b>Terminal 39:</b> 37</li> <li><b>Terminal 40:</b> 38</li> </ul> <p>Connections I(III) and II(IV) are shown with positive (+) and negative (-) polarity indicators.</p>																											

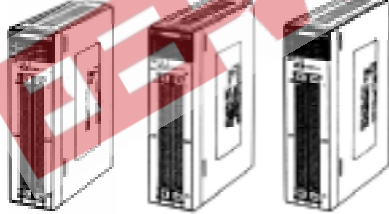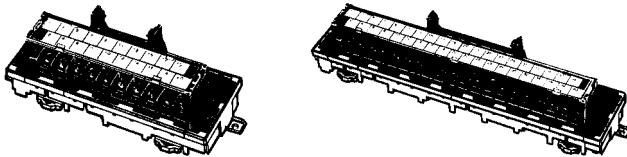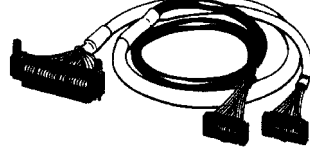Item	High-density I/O 1:1 Connection
PLC I/O module	 <p>CS1W-ID29□ CS1W-OD29□ CS1W-MD29□</p> <p>Use two terminal blocks and two cables.</p>
Terminal block	 <p>One XW2B-60G5 or one XW2B-60G4 per cable</p>
Cable	 <p>XW2Z-□□□H-1</p>
Connection	<p>XW2B-60G□</p> 

Item	High-density I/O 1:2 Connection
PLC I/O module	 <p>CS1W-ID29□ CS1W-OD29□ CS1W-MD29□</p> <p>Use two 40-point and two 20-point terminal blocks and two cables.</p>
Terminal block	 <p>XW2B-40G5 + XW2B-20G5 blocks or XW2B-40G4 + XW2B-20G4 blocks per cable</p>
Cable	 <p>XW2Z-□□□H-2</p>
Connection	<p>XW2B-40G□</p>  <p>XW2B-20G□</p> 

Note: For detailed information about connector pin-outs, refer to CS1 Operation Manual (W339), Appendix A.

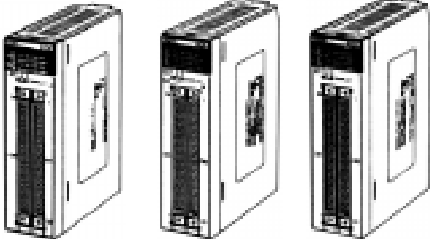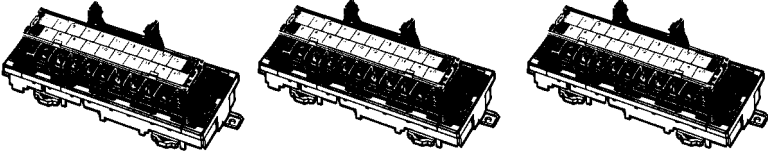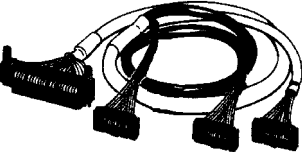Item	High-density I/O 1:3 Connection
PLC I/O module	 <p data-bbox="995 389 1139 454">CS1W-ID29□ CS1W-OD29□ CS1W-MD29□</p> <p data-bbox="995 474 1326 517">Use six 20-point terminal blocks of the same kind and two cables.</p>
Terminal block	 <p data-bbox="1166 595 1445 660">Three XW2B-20G5 blocks or three XW2B-20G4 blocks per cable</p>
Cable	 <p data-bbox="1018 819 1177 842">XW2Z-□□□H-3</p>
Connection	 <p data-bbox="384 936 512 958">XW2B-20G□</p> <p data-bbox="735 936 863 958">XW2B-20G□</p> <p data-bbox="1086 936 1214 958">XW2B-20G□</p>

Note: For detailed information about connector pin-outs, refer to CS1 Operation Manual (W339), Appendix A.

**NOTE: DIMENSIONS SHOWN ARE IN MILLIMETERS. To convert millimeters to inches divide by 25.4.**

**OMRON**<sup>®</sup>  
**OMRON ELECTRONICS, INC.**  
 One East Commerce Drive  
 Schaumburg, IL 60173  
**1-800-55-OMRON**

**OMRON CANADA, INC.**  
 885 Milner Avenue  
 Scarborough, Ontario M1B 5V8  
**416-286-6465**