EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet (Preliminary) 0605 Package Chip LED (0.5mm Height)

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Wide viewing angle.
- Pb-free.
- The product itself will remain within RoHS
 - compliant version.

Descriptions

- frame type components, thus enable smaller board frame type acking density, reduced storage and finally smaller equil • The 10-21 SMD Taping is much smaller than lead
- Besides, lightweight makes them ideal for miniature applications. etc.


Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.
- Indoor signboard use.

Device Selection Guide

	(
Part No.	Material	Emitted Color	Lens Color	
10-21/G7C-BM1N2B/3T	AlGaInP	Brilliant Yellow	Water Clear	
10-21/0/C-DWIIN2D/31	AlGaliii	Green	water Clear	

http://www.everlight.com Prepared date:13-Sep-2005




10-21/G7C-BM1N2B/3T






10-21/G7C-BM1N2B/3T

Package Outline Dimensions

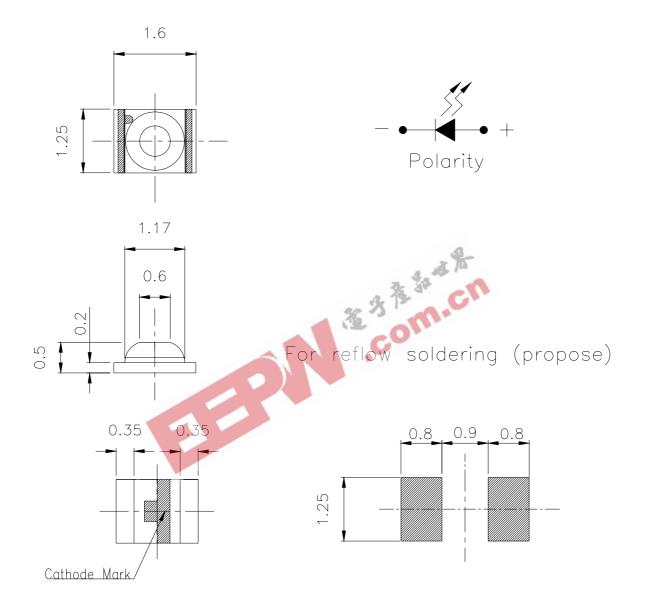



Everlight Electronics Co., Ltd. Device No. : DSE-101-

EVERLIGHT ELECTRONICS CO.,LTD.

10-21/G7C-BM1N2B/3T

Absolute Maximum Ratings (Ta=25°C)

ÆRLIGHT

)			i		
Parameter	Symbol	Rating	Unit		
Reverse Voltage	VR	5	V		
Forward Current	IF	25	mA		
Operating Temperature	Topr	-40 ~ +85	°C		
Storage Temperature	Tstg	-40 ~ +90	°C		
Electrostatic Discharge(HBM)	ESD	2000	V		
Power Dissipation	Pd	60	mW		
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	60	mA		
Soldering Temperature	Tsol	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.			
Electro-Optical Characteristics (Ta=25°C)					

Electro-Optical Characteristics (Ta=25°

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	18		45	mcd	
Peak Wavelength	λρ		575		nm	
Dominant Wavelength	λd	567.5		575.5	nm	
Spectrum Radiation Bandwidth	$ riangle \lambda$		20		nm	IF=20mA
Viewing Angle	2 0 1/2		170		deg	
Forward Voltage	VF	1.75		2.35	V	
Reverse Current	Ir			10	μA	V _R =5V

Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd.

Device No. : DSE-101-

EVERLIGHT ELECTRONICS CO.,LTD.

10-21/G7C-BM1N2B/3T

Bin Range Of Dom. Wavelength

ERLIGHT

Group	Bin	Min	Max	Unit	Condition	
B C15 C16 C17 C18	C15	567.5	569.5			
	C16	569.5	571.5		IF=20mA	
	C17	571.5	573.5	nm		
	C18	573.5	575.5			

Bin Range Of Luminous Intensity

M2	22.5	28.5	mcd	IF=20mA
N1	28.5	36.0	- Incu	
N2	36.0	45.0	2.12	

Bin Range Of Forward Voltage

Group	Bin	Min	Max	Unit	Condition	
	0	1.75	1.95			
В	1	1.95	2.15	V	IF=20mA	
2	2	2.15	2.35			

Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm


3.Tolerance of Forward Voltage ±0.1V

EVERLIGHT ELECTRONICS CO., LTD.

10-21/G7C-BM1N2B/3T

Typical Electro-Optical Characteristics Curves

ÆRLIGHT

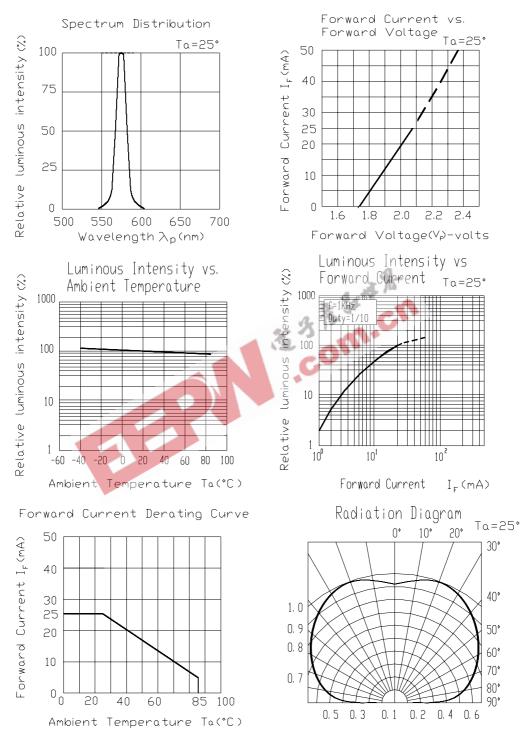

Everlight Electronics Co., Ltd. Device No. : DSE-101-

EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

10-21/G7C-BM1N2B/3T

Label explanation **CAT: Luminous Intensity Rank** HUE: Dom. Wavelength Rank EVERLIGHT **REF: Forward Voltage Rank** CPN: XXXXXX P/N: XXXXXX RoHS XXXXXXXXXXXXXXXXX QTY: XXXX CAT: HUE: REF: NO: XXXXXXXXXXX IN TAIWAN **Reel Dimensions** 2.2±0.5 ¢60.0 ±1.0 Ø178.0 ±1.0 ø13.0±0.5 9.0±1.0 -12.0±1.0


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No. : DSE-101http://www.everlight.com Prepared date:13-Sep-2005 Rev.1 Page: 6 of 10 Prepared by: Alex chen

EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.


10-21/G7C-BM1N2B/3T

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

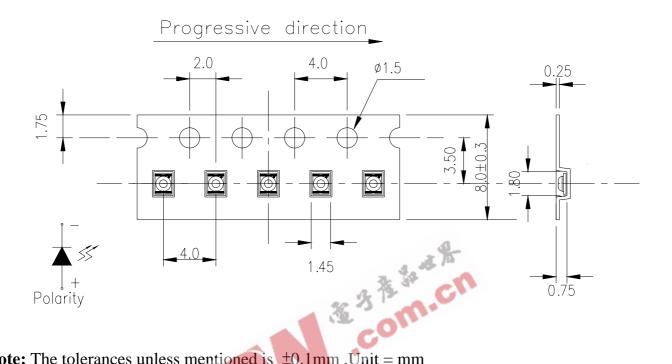

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

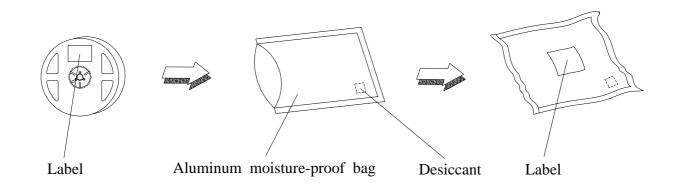

EVERLIGHT EVERLIGHT ELECTRONICS CO.,LTD.

10-21/G7C-BM1N2B/3T

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min $\int 10 \sec$ L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp . : 100℃	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1


10-21/G7C-BM1N2B/3T

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - Do not open moisture proof bag before the products are ready to use. 2.1
- 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90% RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment : $60\pm5^{\circ}$ C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

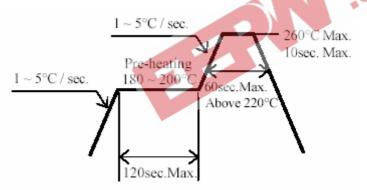

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.


<u>10-21/G7C-BM1N2B/3T</u>

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

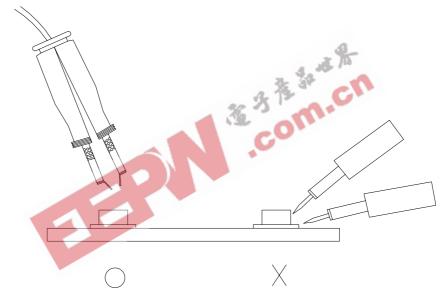

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

Everlight Electronics Co., Ltd. Device No. : DSE-101http://www.everlight.com Prepared date:13-Sep-2005 Rev.1 Page: 10 of 10 Prepared by: Alex chen