

FEATURES


- Specified Break-Before-Make Switching
- Low ON-State Resistance (0.75 Ω Max)
- Control Inputs Referenced to V_{IO}
- Low Charge Injection
- Excellent ON-State Resistance Matching
- Low Total Harmonic Distortion (THD)
- 2.25-V to 5.5-V Power Supply (V_+)
- 1.65-V to 1.95-V Logic Supply (V_{IO})
- Latch-Up Performance Exceeds 100 mA Per JESD 78, Class II
- ESD Performance Tested Per JESD 22
 - 4000-V Human-Body Model (A114-B, Class II)
 - 1000-V Charged-Device Model (C101)
 - 400-V Machine Model (A115-A)

- COM Port to GND
 - 8000-V Human-Body Model (A114-B, Class II)
 - ±15-kV Contact Discharge (IEC 61000-4-2)

APPLICATIONS

- Cell Phones
- PDAs
- Portable Instrumentation

YZT PACKAGE
(BOTTOM VIEW)



DESCRIPTION/ORDERING INFORMATION

The TS5A6542 is a single-pole double-throw (SPDT) analog switch that is designed to operate from 2.25 V to 5.5 V. The device offers a low ON-state resistance with an excellent channel-to-channel ON-state resistance matching, and the break-before-make feature to prevent signal distortion during the transferring of a signal from one path to another. The device has excellent total harmonic distortion (THD) performance and consumes very low power. These features make this device suitable for portable audio applications.

The TS5A6542 has a separate logic supply pin (V_{IO}) operates from 1.65 V to 1.95 V. V_{IO} powers the control circuitry, which allows the TS5A6542 to be controlled by 1.8-V signals.

ORDERING INFORMATION

T_A	PACKAGE ⁽¹⁾		ORDERABLE PART NUMBER	TOP-SIDE MARKING ⁽²⁾
–40°C to 85°C	NanoFree™ – WCSP (DSBGA) 0.23-mm Large Bump – YZT (Pb-free) 0.625-mm max height	Tape and reel	TS5A6542YZTR	— — JH7

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

(2) YZT: The actual top-side marking has three preceding characters to denote year, month, and sequence code, and one following character to designate the assembly/test site. Pin 1 identifier indicates solder-bump composition (1 = SnPb, • = Pb-free).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

NanoFree is a trademark of Texas Instruments.

TS5A6542

0.75-Ω SPDT ANALOG SWITCH WITH INPUT LOGIC TRANSLATION

SCDS230–APRIL 2006



SUMMARY OF CHARACTERISTICS⁽¹⁾

Configuration	2:1 Multiplexer/Demultiplexer (1 × SPDT)
Number of channels	1
ON-state resistance (r_{on})	0.75 Ω max
ON-state resistance match (Δr_{on})	0.1 Ω max
ON-state resistance flatness [$r_{on(Flat)}$]	0.1 Ω max
Turn-on/turn-off time (t_{ON}/t_{OFF})	25 ns/20 ns
Charge injection (Q_C)	15 pC
Bandwidth (BW)	43 MHz
OFF isolation (O_{ISO})	–63 dB at 1 MHz
Crosstalk (X_{TALK})	–63 dB at 1 MHz
Total harmonic distortion (THD)	0.004%
Leakage current [$I_{NO(OFF)}/I_{NC(OFF)}$]	20 nA
Package option	8-pin WCSP

(1) $V_+ = 5\text{ V}$, $T_A = 25^\circ\text{C}$

FUNCTION TABLE

IN	NC TO COM, COM TO NC	NO TO COM, COM TO NO
L	ON	OFF
H	OFF	ON

Absolute Maximum Ratings⁽¹⁾⁽²⁾

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V_+ V_{IO}	Supply voltage range ⁽³⁾		−0.5	6.5	V
V_{NC} V_{NO} V_{COM}	Analog voltage range ⁽³⁾⁽⁴⁾⁽⁵⁾		−0.5	$V_+ + 0.5$	V
$I_{I/OK}$	Analog port diode current ⁽⁶⁾	$V_{NO}, V_{COM} < 0$ or $V_{NO}, V_{COM} > V_+$	−50	50	mA
I_{NC} I_{NO} I_{COM}	On-state switch current	$V_{NO}, V_{COM} = 0$ to V_+	−200	200	mA
	On-state peak switch current ⁽⁷⁾		−400	400	
V_I	Digital input voltage range ⁽³⁾⁽⁴⁾		−0.5	6.5	V
I_{IK}	Digital input clamp current	$V_I < 0$	−50		mA
I_+ I_{GND}	Continuous current through V_+ or GND		−100	100	mA
θ_{JA}	Package thermal impedance ⁽⁸⁾			102	°C/W
T_{stg}	Storage temperature range		−65	150	°C

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum
- (3) All voltages are with respect to ground, unless otherwise specified.
- (4) The input and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
- (5) This value is limited to 5.5 V maximum.
- (6) Requires clamp diodes on analog port to V_+ .
- (7) Pulse at 1-ms duration <10% duty cycle
- (8) The package thermal impedance is calculated in accordance with JESD 51-7.

Electrical Characteristics for 5-V Supply⁽¹⁾

$V_+ = 4.5\text{ V to }5.5\text{ V}$, $V_{IO} = 1.65\text{ V to }1.95\text{ V}$, $T_A = -40^\circ\text{C to }85^\circ\text{C}$ (unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS		T _A	V ₊	MIN	TYP	MAX	UNIT
Analog Switch									
Analog signal range	V _{COM} , V _{NO}					0		V ₊	V
ON-state resistance	r _{on}	V _{NO} or V _{NC} = 2.5 V, I _{COM} = −100 mA,	Switch ON, See Figure 14	25°C Full	4.5 V	0.5	0.75	0.8	Ω
ON-state resistance match between channels	Δr _{on}	V _{NO} or V _{NC} = 2.5 V, I _{COM} = −100 mA,	Switch ON, See Figure 14	25°C Full	4.5 V	0.05	0.1	0.1	Ω
ON-state resistance flatness	r _{on(flat)}	0 ≤ (V _{NO} or V _{NC}) ≤ V ₊ , I _{COM} = −100 mA,	Switch ON, See Figure 14	25°C	4.5 V	0.1			Ω
		V _{NO} or V _{NC} = 1 V, 1.5 V, 2.5 V, I _{COM} = −100 mA,	Switch ON, See Figure 14	25°C		0.1	0.25		
				Full		0.25			
NO, NC OFF leakage current	I _{NO(OFF)} , I _{NC(OFF)}	V _{NO} = 1 V, 4.5 V, V _{COM} = 4.5 V, 1 V, V _{NC} = Open, or V _{NO} = 1 V, 4.5 V, V _{COM} = 4.5 V, 1 V, V _{NO} = Open,	Switch OFF, See Figure 15	25°C Full	5.5 V	−20	2	20	nA
NC, NO ON leakage current	I _{NO(ON)}	V _{NO} = 1 V, 4.5 V, V _{COM} , V _{NC} = Open, or V _{NC} = 1 V, 4.5 V, V _{COM} , V _{NO} = Open,	Switch ON, See Figure 16	25°C Full	5.5 V	−20	2	20	nA
COM ON leakage current	I _{COM(ON)}	V _{COM} = 1 V, 4.5 V, V _{NO} and V _{NC} = Open, or V _{COM} = 1 V, 4.5 V, V _{NO} or V _{NC} = Open,	See Figure 16	25°C Full	5.5 V	−20	2	20	nA
Digital Control Input (IN) ⁽²⁾									
Input logic high	V _{IH}	V _{IO} = 1.65 V to 1.95 V		Full		0.65 × V _{IO}		V _{IO}	V
Input logic low	V _{IL}	V _{IO} = 1.65 V to 1.95 V		Full		0		0.35 × V _{IO}	V
Input leakage current	I _{IH} , I _{IL}	V _I = V _{IO} or 0		25°C Full	5.5 V	−2		2	nA
						−20		20	

(1) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum

(2) All unused digital inputs of the device must be held at V_{IO} or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

TS5A6542
0.75-Ω SPDT ANALOG SWITCH
WITH INPUT LOGIC TRANSLATION



SCDS230–APRIL 2006

Electrical Characteristics for 5-V Supply⁽¹⁾ (continued)

$V_+ = 4.5\text{ V to }5.5\text{ V}$, $V_{IO} = 1.65\text{ V to }1.95\text{ V}$, $T_A = -40^\circ\text{C to }85^\circ\text{C}$ (unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	T_A	V_+	MIN	TYP	MAX	UNIT
Dynamic								
Turn-on time	t_{ON}	$V_{COM} = V_+$, $R_L = 50\ \Omega$, $C_L = 35\text{ pF}$, See Figure 18	25°C	5 V	1	12.5	25	ns
			Full	4.5 V			30	
Turn-off time	t_{OFF}	$V_{COM} = V_+$, $R_L = 50\ \Omega$, $C_L = 35\text{ pF}$, See Figure 18	25°C	5 V	1	9.5	20	ns
			Full	4.5 V			25	
Break-before-make time	t_{BBM}	$V_{NC} = V_{NO} = V_+/2$, $R_L = 50\ \Omega$, $C_L = 35\text{ pF}$, See Figure 19	25°C	5 V	1	5	10	ns
			Full	4.5 V	1		12	
Charge injection	Q_C	$V_{GEN} = 0$, $R_{GEN} = 0$, $C_L = 1\text{ nF}$, See Figure 23	25°C	5 V		15		pC
NO OFF capacitance	$C_{NO(OFF)}$	$V_{NO} = V_+$ or GND, Switch OFF,	25°C	5 V		37		pF
NC, NO ON capacitance	$C_{NC(ON)}$, $C_{NO(ON)}$	V_{NC} or $V_{NO} = V_+$ or GND, Switch ON,	25°C	5 V		130		pF
COM ON capacitance	$C_{COM(ON)}$	$V_{COM} = V_+$ or GND, Switch ON,	25°C	5 V		130		pF
Digital input capacitance	C_I	$V_I = V_{IO}$ or GND,	25°C	5 V		6.5		pF
Bandwidth	BW	$R_L = 50\ \Omega$, Switch ON,	25°C	5 V		43		MHz
OFF isolation	O_{ISO}	$R_L = 50\ \Omega$, $f = 1\text{ MHz}$,	25°C	5 V		–63		dB
Crosstalk	X_{TALK}	$R_L = 50\ \Omega$, $f = 1\text{ MHz}$,	25°C	5 V		–63		dB
Total harmonic distortion	THD	$R_L = 600\ \Omega$, $C_L = 50\text{ pF}$, $f = 20\text{ Hz to }20\text{ kHz}$, See Figure 24	25°C	5 V		0.004		%
Supply								
Positive supply current	I_+	$V_I = V_{IO}$ or GND	25°C	5.5 V		5.5	100	nA
			Full				750	

(1) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum

Electrical Characteristics for 3.3-V Supply⁽¹⁾

$V_+ = 3\text{ V}$ to 3.6 V , $V_{IO} = 1.65\text{ V}$ to 1.95 V , $T_A = -40^\circ\text{C}$ to 85°C (unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	T_A	V_+	MIN	TYP	MAX	UNIT
Analog Switch								
Analog signal range	V_{COM}, V_{NO}				0		V_+	V
ON-state resistance	r_{on}	V_{NO} or $V_{NC} = 2\text{ V}$, $I_{COM} = -100\text{ mA}$, Switch ON, See Figure 14	25°C Full	3 V	0.75	0.9	1.2	Ω
ON-state resistance match between channels	Δr_{on}	V_{NO} or $V_{NC} = 2\text{ V}$, 0.8 V, $I_{COM} = -100\text{ mA}$, Switch ON, See Figure 14	25°C Full	3 V	0.1	0.15	0.15	Ω
ON-state resistance flatness	$r_{on(flat)}$	$0 \leq (V_{NO} \text{ or } V_{NC}) \leq V_+$, $I_{COM} = -100\text{ mA}$, Switch ON, See Figure 14	25°C	3 V	0.2			Ω
		V_{NO} or $V_{NC} = 0.8\text{ V}$, 2 V, $I_{COM} = -100\text{ mA}$, Switch ON, See Figure 14	25°C Full		0.1	0.3	0.3	Ω
NO, NC OFF leakage current	$I_{NO(OFF)}, I_{NC(OFF)}$	$V_{NO} = 1\text{ V}$, 3 V, $V_{COM} = 3\text{ V}$, 1 V, $V_{NC} = \text{Open}$, or $V_{NC} = 1\text{ V}$, 3 V, $V_{COM} = 3\text{ V}$, 1 V, $V_{NO} = \text{Open}$, Switch OFF, See Figure 15	25°C Full	3.6 V	-20	2	20	nA
NC, NO ON leakage current	$I_{NO(ON)}$	$V_{NO} = 1\text{ V}$, 3 V, V_{NC} and $V_{COM} = \text{Open}$, or $V_{NC} = 1\text{ V}$, 3 V, V_{NO} and $V_{COM} = \text{Open}$, Switch ON, See Figure 16	25°C Full	3.6 V	-10	2	10	nA
COM ON leakage current	$I_{COM(ON)}$	$V_{COM} = 1\text{ V}$, V_{NO} and $V_{NC} = \text{Open}$, or $V_{COM} = 3\text{ V}$, V_{NO} and $V_{NC} = \text{Open}$, See Figure 16	25°C Full	3.6 V	-10	2	10	nA
Digital Control Input (IN)⁽²⁾								
Input logic high	V_{IH}	$V_{IO} = 1.65\text{ V}$ to 1.95 V	Full		$0.65 \times V_{IO}$		V_{IO}	V
Input logic low	V_{IL}	$V_{IO} = 1.65\text{ V}$ to 1.95 V	Full		0		$0.35 \times V_{IO}$	V
Input leakage current	I_{IH}, I_{IL}	$V_I = V_{IO}$ or 0	25°C Full	3.6 V	-2		2	nA
					-20		20	

(1) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum

(2) All unused digital inputs of the device must be held at V_{IO} or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

TS5A6542
0.75-Ω SPDT ANALOG SWITCH
WITH INPUT LOGIC TRANSLATION



SCDS230–APRIL 2006

Electrical Characteristics for 3.3-V Supply⁽¹⁾ (continued)

$V_+ = 3\text{ V to }3.6\text{ V}$, $V_{IO} = 1.65\text{ V to }1.95\text{ V}$, $T_A = -40^\circ\text{C to }85^\circ\text{C}$ (unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	T_A	V_+	MIN	TYP	MAX	UNIT
Dynamic								
Turn-on time	t_{ON}	$V_{COM} = V_+$, $R_L = 50\ \Omega$, $C_L = 35\text{ pF}$, See Figure 18	25°C	3.3 V	5	15	30	ns
			Full	3 V	3		35	
Turn-off time	t_{OFF}	$V_{COM} = V_+$, $R_L = 50\ \Omega$, $C_L = 35\text{ pF}$, See Figure 18	25°C	3.3 V	1	9	20	ns
			Full	3 V	1		25	
Break-before-make time	t_{BBM}	$V_{NC} = V_{NO} = V_+/2$, $R_L = 50\ \Omega$, $C_L = 35\text{ pF}$, See Figure 19	25°C	3.3 V	1	8	13	ns
			Full	3 V	1		15	
Charge injection	Q_C	$V_{GEN} = 0$, $R_{GEN} = 0$, $C_L = 1\text{ nF}$, See Figure 23	25°C	3.3V		6.5		pC
NO OFF capacitance	$C_{NO(OFF)}$	$V_{NO} = V_+$ or GND, Switch OFF,	25°C	3.3 V		38		pF
NC, NO ON capacitance	$C_{NC(ON)}$, $C_{NO(ON)}$	V_{NC} or $V_{NO} = V_+$ or GND, Switch ON,	25°C	3.3 V		133		pF
COM ON capacitance	$C_{COM(ON)}$	$V_{COM} = V_+$ or GND, Switch ON,	25°C	3.3 V		133		pF
Digital input capacitance	C_I	$V_I = V_{IO}$ or GND,	25°C	3.3 V		6.5		pF
Bandwidth	BW	$R_L = 50\ \Omega$, Switch ON,	25°C	3.3 V		42		MHz
OFF isolation	O_{ISO}	$R_L = 50\ \Omega$, $f = 1\text{ MHz}$,	25°C	3.3 V		–63		dB
Crosstalk	X_{TALK}	$R_L = 50\ \Omega$, $f = 1\text{ MHz}$,	25°C	3.3 V		–63		dB
Total harmonic distortion	THD	$R_L = 600\ \Omega$, $C_L = 50\text{ pF}$, $f = 20\text{ Hz to }20\text{ kHz}$, See Figure 24	25°C	3.3 V		0.004		%
Supply								
Positive supply current	I_+	$V_I = V_{IO}$ or GND	25°C	3.6 V		10	50	nA
			Full				300	

(1) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum

Electrical Characteristics for 2.5-V Supply⁽¹⁾

$V_+ = 2.25\text{ V to }2.75\text{ V}$, $V_{IO} = 1.65\text{ V to }1.95\text{ V}$, $T_A = -40^\circ\text{C to }85^\circ\text{C}$ (unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	T_A	V_+	MIN	TYP	MAX	UNIT
Analog Switch								
Analog signal range	V_{COM}, V_{NO}				0		V_+	V
ON-state resistance	r_{on}	V_{NO} or $V_{NC} = 1.8\text{ V}$, $I_{COM} = -100\text{ mA}$, Switch ON, See Figure 14	25°C Full	2.25 V		1	1.3 1.6	Ω
ON-state resistance match between channels	Δr_{on}	V_{NO} or $V_{NC} = 1.8\text{ V}$, 0.8 V, $I_{COM} = -100\text{ mA}$, Switch ON, See Figure 14	25°C Full	2.25 V		0.15	0.2 0.2	Ω
ON-state resistance flatness	$r_{on(flat)}$	$0 \leq (V_{NO} \text{ or } V_{NC}) \leq V_+$, $I_{COM} = -100\text{ mA}$, Switch ON, See Figure 14	25°C	2.25 V		0.5		Ω
		V_{NO} or $V_{NC} = 0.8\text{ V}, 1\text{ V}, 1.8\text{ V}$, $I_{COM} = -100\text{ mA}$, Switch ON, See Figure 14	25°C Full			0.25	0.5 0.6	
NO, NC OFF leakage current	$I_{NO(OFF)}, I_{NC(OFF)}$	$V_{NO} = 0.5\text{ V}, 2.2\text{ V}$, $V_{COM} = 2.2\text{ V}, 0.5\text{ V}$, $V_{NC} = \text{Open}$, or $V_{NC} = 0.5\text{ V}, 2.2\text{ V}$, $V_{COM} = 2.2\text{ V}, 0.5\text{ V}$, $V_{NO} = \text{Open}$, Switch OFF, See Figure 15	25°C Full	2.75 V	-20	2	20 50	nA
NC, NO ON leakage current	$I_{NO(ON)}$	$V_{NO} = 0.5\text{ V}, 2.2\text{ V}$, V_{NC} and $V_{COM} = \text{Open}$, or $V_{NC} = 2.2\text{ V}, 0.5\text{ V}$, V_{NO} and $V_{COM} = \text{Open}$, Switch ON, See Figure 16	25°C Full	2.75 V	-10	2	10 20	nA
COM ON leakage current	$I_{COM(ON)}$	$V_{COM} = 0.5\text{ V}$, V_{NO} and $V_{NC} = \text{Open}$, or $V_{COM} = 2.2\text{ V}$, V_{NO} and $V_{NC} = \text{Open}$, Switch ON, See Figure 16	25°C Full	2.75 V	-10	2	10 20	nA
Digital Control Input (IN)⁽²⁾								
Input logic high	V_{IH}	$V_{IO} = 1.65\text{ V to }1.95\text{ V}$	Full		$0.65 \times V_{IO}$		V_{IO}	V
Input logic low	V_{IL}	$V_{IO} = 1.65\text{ V to }1.95\text{ V}$	Full		0		$0.35 \times V_{IO}$	V
Input leakage current	I_{IH}, I_{IL}	$V_I = V_{IO}$ or 0	25°C Full	2.75 V	-2		2 20	nA

(1) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum

(2) All unused digital inputs of the device must be held at V_{IO} or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

TS5A6542
0.75-Ω SPDT ANALOG SWITCH
WITH INPUT LOGIC TRANSLATION



SCDS230–APRIL 2006

Electrical Characteristics for 2.5-V Supply⁽¹⁾ (continued)

$V_+ = 2.25\text{ V to }2.75\text{ V}$, $V_{IO} = 1.65\text{ V to }1.95\text{ V}$, $T_A = -40^\circ\text{C to }85^\circ\text{C}$ (unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	T_A	V_+	MIN	TYP	MAX	UNIT
Dynamic								
Turn-on time	t_{ON}	$V_{COM} = V_+$, $R_L = 50\ \Omega$, $C_L = 35\text{ pF}$, See Figure 18	25°C	2.5 V	5	20	35	ns
			Full	2.25 V	5		40	
Turn-off time	t_{OFF}	$V_{COM} = V_+$, $R_L = 50\ \Omega$, $C_L = 35\text{ pF}$, See Figure 18	25°C	2.5 V	2	10	20	ns
			Full	2.25 V	2		25	
Break-before-make time	t_{BBM}	$V_{NC} = V_{NO} = V_+/2$, $R_L = 50\ \Omega$, $C_L = 35\text{ pF}$, See Figure 19	25°C	2.5 V	1	11	20	ns
			Full	2.25 V	1		25	
Charge injection	Q_C	$V_{GEN} = 0$, $R_{GEN} = 0$, $C_L = 1\text{ nF}$, See Figure 23	25°C	2.5 V		5		pC
NO OFF capacitance	$C_{NO(OFF)}$	$V_{NO} = V_+$ or GND, Switch OFF,	25°C	2.5 V		38		pF
NC, NO ON capacitance	$C_{NC(ON)}$, $C_{NO(ON)}$	V_{NC} or $V_{NO} = V_+$ or GND, Switch ON,	25°C	2.5 V		135		pF
COM ON capacitance	$C_{COM(ON)}$	$V_{COM} = V_+$ or GND, Switch ON,	25°C	2.5 V		135		pF
Digital input capacitance	C_I	$V_I = V_{IO}$ or GND,	25°C	2.5 V		6.5		pF
Bandwidth	BW	$R_L = 50\ \Omega$, Switch ON,	25°C	2.5 V		40		MHz
OFF isolation	O_{ISO}	$R_L = 50\ \Omega$, $f = 1\text{ MHz}$,	25°C	2.5 V		–63		dB
Crosstalk	X_{TALK}	$R_L = 50\ \Omega$, $f = 1\text{ MHz}$,	25°C	2.5 V		–63		dB
Total harmonic distortion	THD	$R_L = 600\ \Omega$, $C_L = 50\text{ pF}$, $f = 20\text{ Hz to }20\text{ kHz}$, See Figure 24	25°C	2.5 V		0.008		%
Supply								
Positive supply current	I_+	$V_I = V_{IO}$ or GND	25°C	2.75 V		10	25	nA
			Full				100	

(1) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum

TYPICAL PERFORMANCE

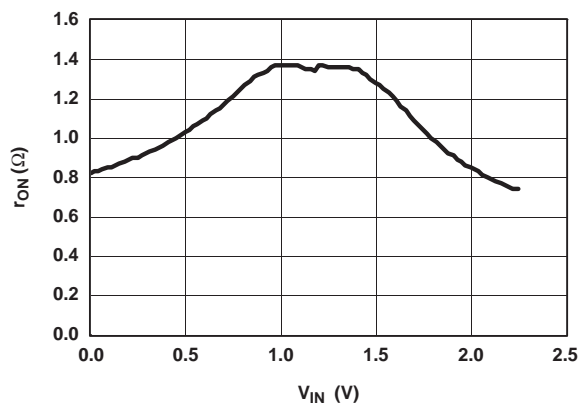


Figure 1. r_{ON} vs V_{COM} ($V_+ = 2.5$ V)

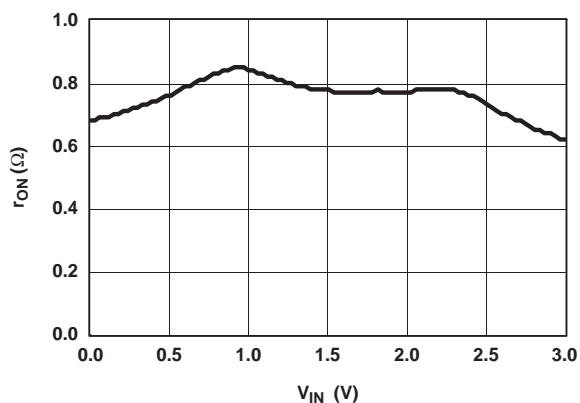


Figure 2. r_{ON} vs V_{COM} ($V_+ = 3.3$ V)

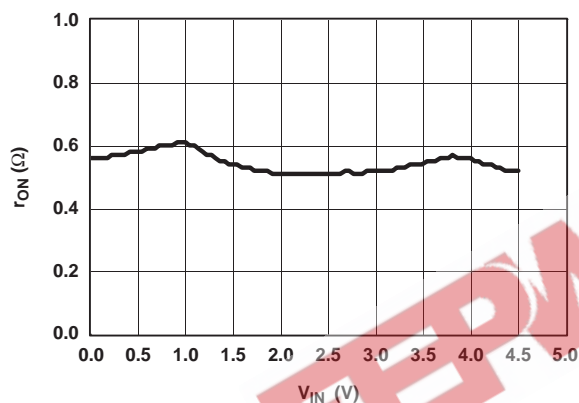


Figure 3. r_{ON} vs V_{COM} ($V_+ = 5$ V)

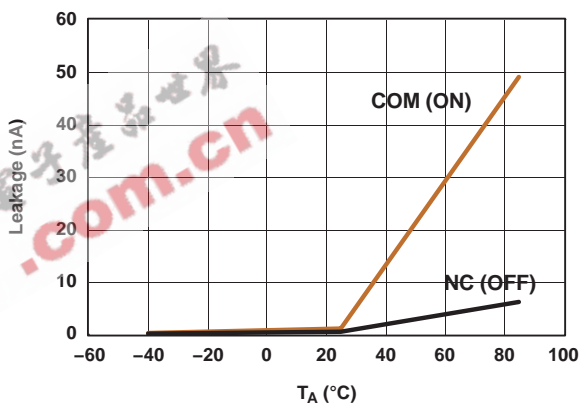


Figure 4. Leakage Current vs Temperature ($V_+ = 5$ V)

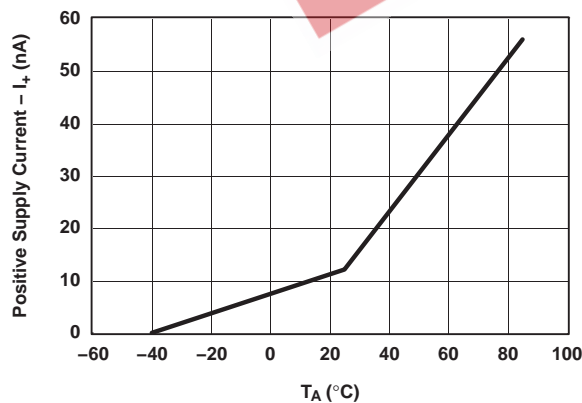


Figure 5. I_+ vs Temperature ($V_+ = 5$ V)

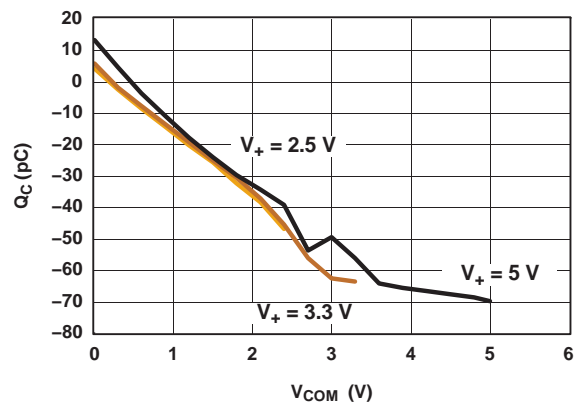


Figure 6. Charge Injection (Q_C) vs V_{COM}

TS5A6542
0.75-Ω SPDT ANALOG SWITCH
WITH INPUT LOGIC TRANSLATION

SCDS230–APRIL 2006

TYPICAL PERFORMANCE (continued)

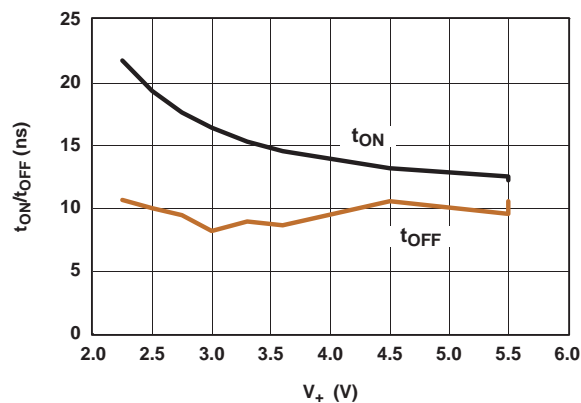


Figure 7. t_{ON}/t_{OFF} vs Supply Voltage

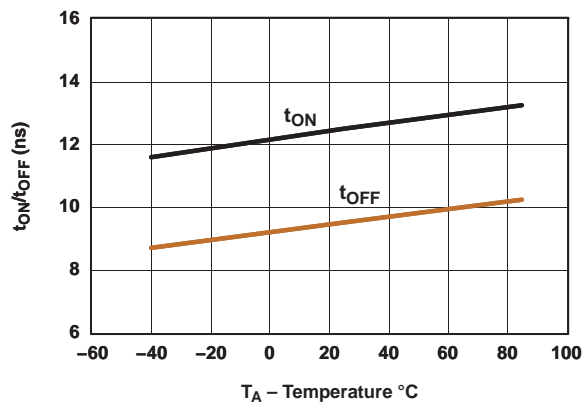


Figure 8. t_{ON}/t_{OFF} vs Temperature ($V_+ = 5\text{ V}$)

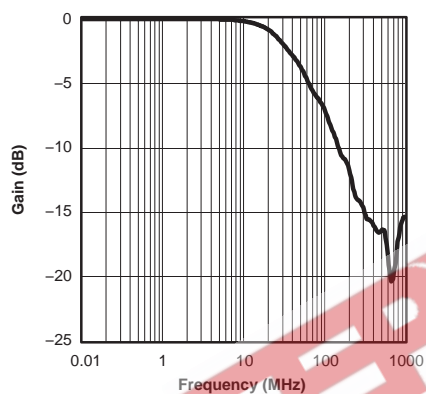


Figure 9. Gain vs Frequency ($V_+ = 5\text{ V}$)

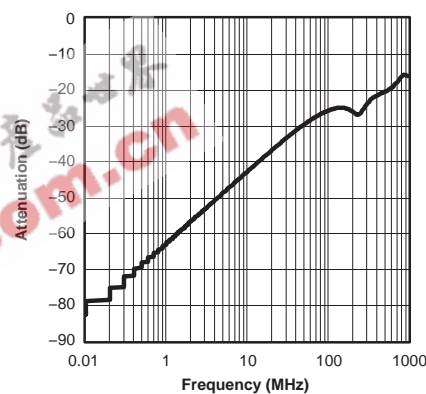


Figure 10. Crosstalk vs Frequency ($V_+ = 5\text{ V}$)

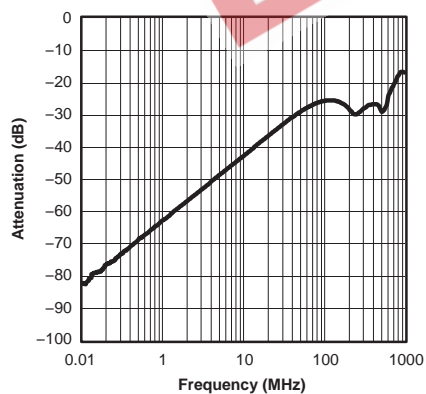


Figure 11. OFF Isolation vs Frequency ($V_+ = 5\text{ V}$)

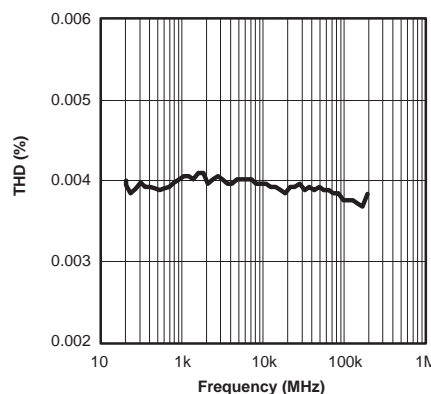


Figure 12. Total Harmonic Distortion vs Frequency ($V_+ = 2.5\text{ V}$)

TYPICAL PERFORMANCE (continued)

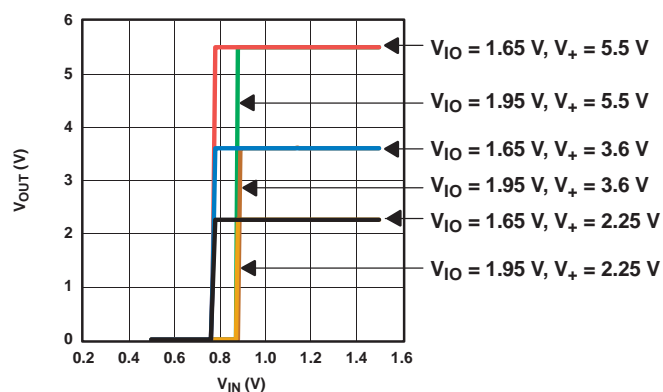


Figure 13. V_{IO} Thresholds



PARAMETER MEASUREMENT INFORMATION

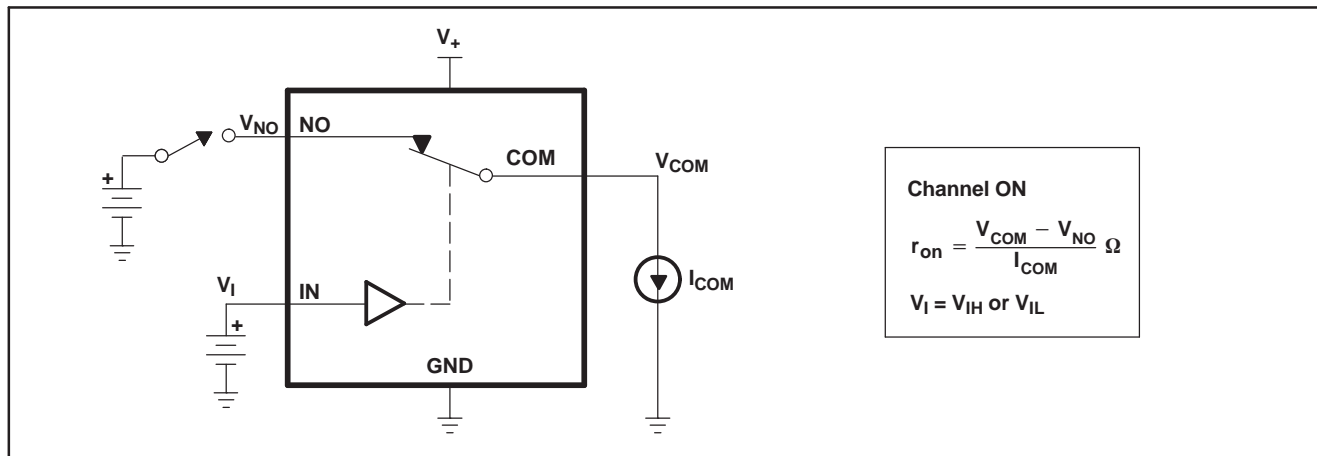


Figure 14. ON-State Resistance (r_{on})

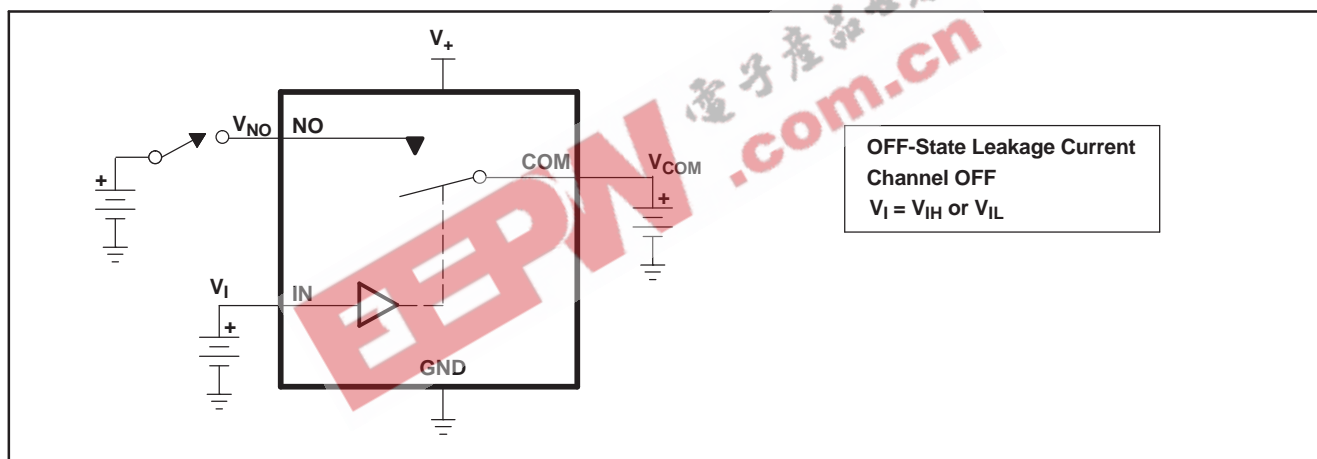


Figure 15. OFF-State Leakage Current ($I_{COM(OFF)}$, $I_{NC(OFF)}$, $I_{COM(PWROFF)}$, $I_{NC(PWROFF)}$)

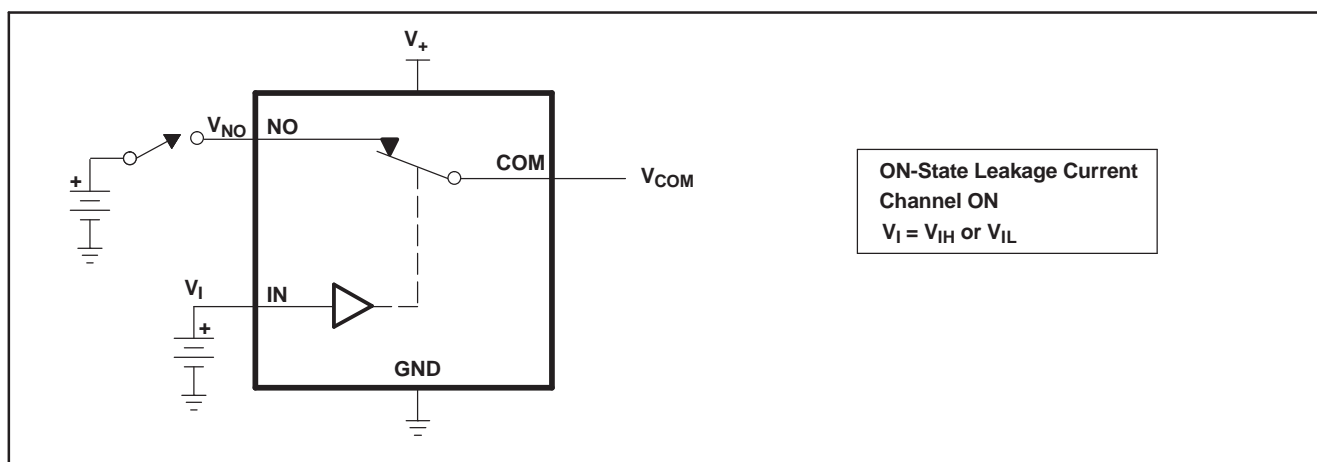


Figure 16. ON-State Leakage Current ($I_{COM(ON)}$, $I_{NC(ON)}$)

PARAMETER MEASUREMENT INFORMATION (continued)


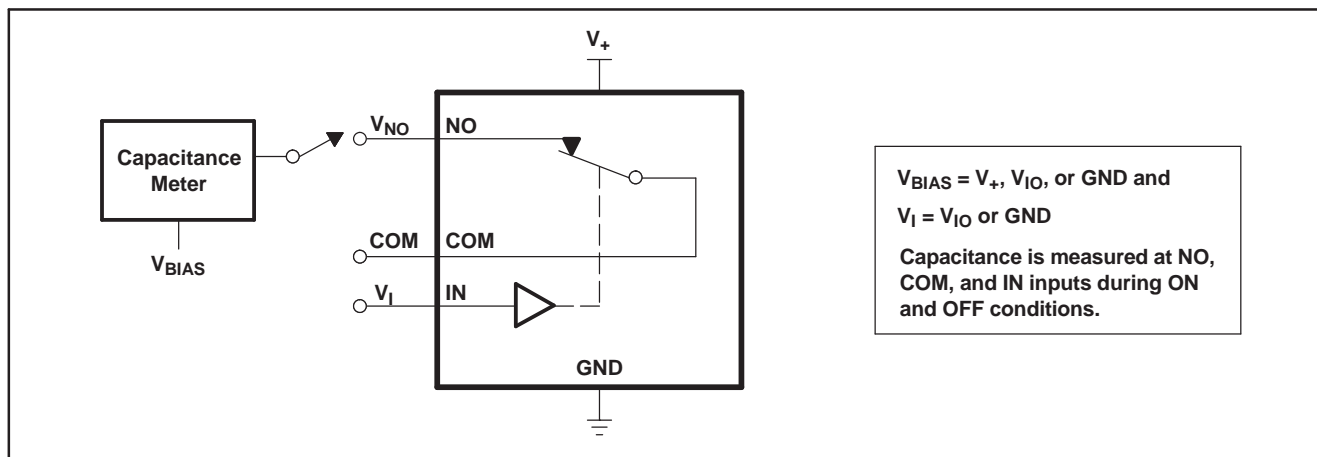


Figure 17. Capacitance (C_I , $C_{COM(OFF)}$, $C_{COM(ON)}$, $C_{NC(OFF)}$, $C_{NC(ON)}$)

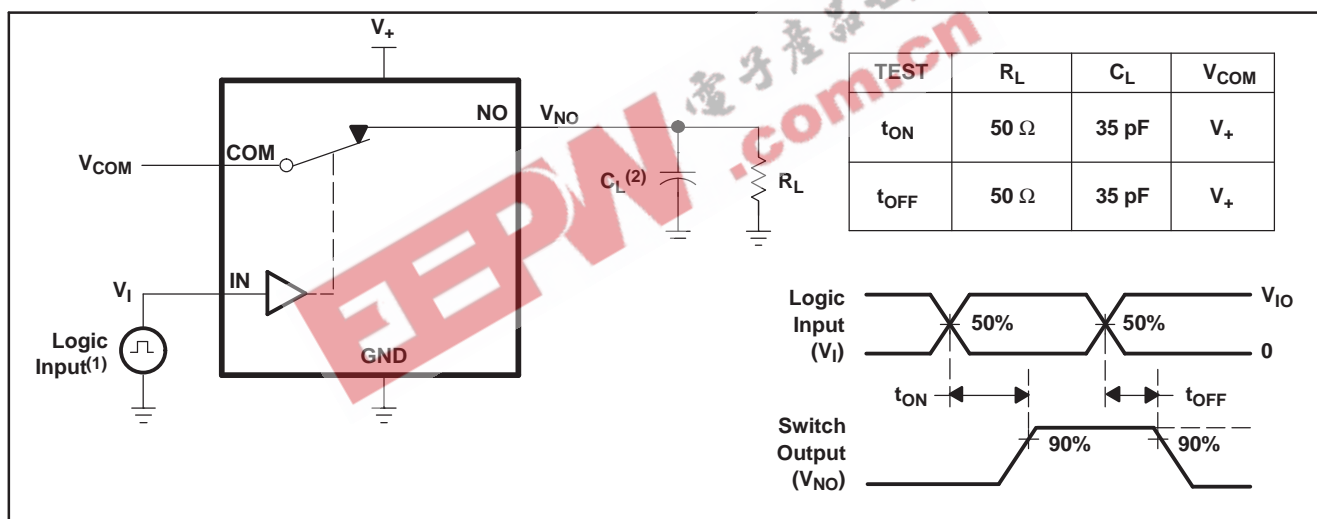

⁽¹⁾ All input pulses are supplied by generators having the following characteristics: PRR \leq 10 MHz, $Z_O = 50 \Omega$, $t_r < 5 \text{ ns}$, $t_f < 5 \text{ ns}$.

⁽²⁾ C_L includes probe and jig capacitance.

Figure 18. Turn-On (t_{ON}) and Turn-Off Time (t_{OFF})


TS5A6542

0.75-Ω SPDT ANALOG SWITCH

WITH INPUT LOGIC TRANSLATION

SCDS230–APRIL 2006

PARAMETER MEASUREMENT INFORMATION (continued)

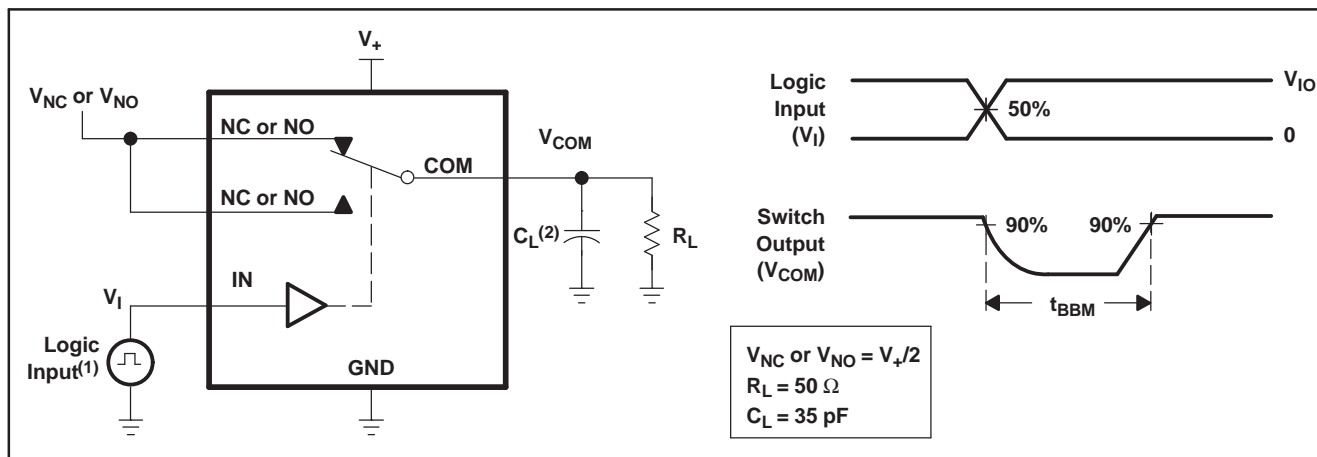

- (1) All input pulses are supplied by generators having the following characteristics: PRR $\leq 10\ \text{MHz}$, $Z_O = 50\ \Omega$, $t_r < 5\ \text{ns}$, $t_f < 5\ \text{ns}$.
 (2) C_L includes probe and jig capacitance.

Figure 19. Break-Before-Make Time (t_{BBM})

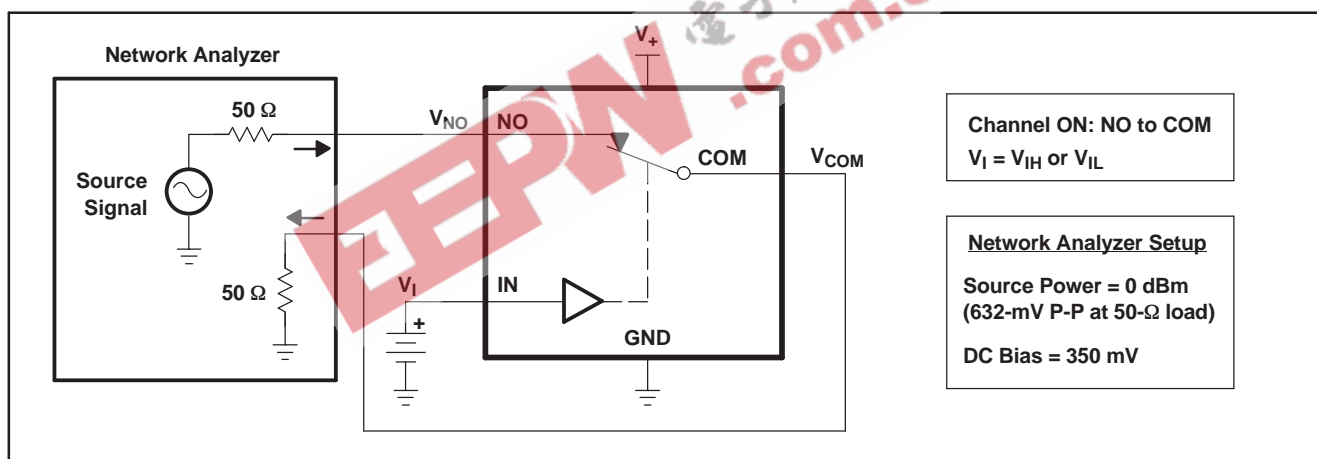


Figure 20. Bandwidth (BW)

PARAMETER MEASUREMENT INFORMATION (continued)

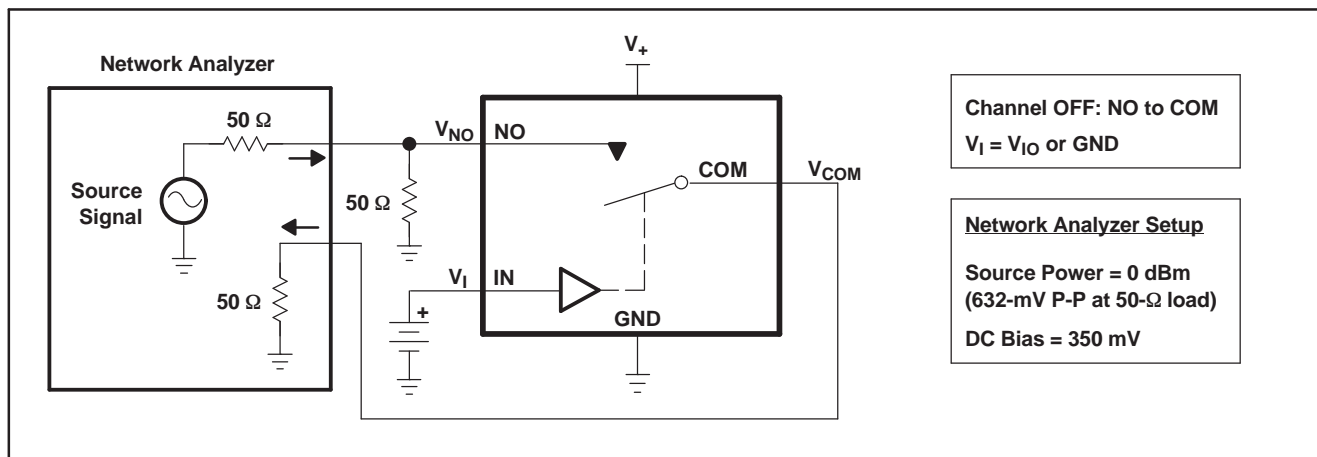


Figure 21. OFF Isolation (O_{ISO})


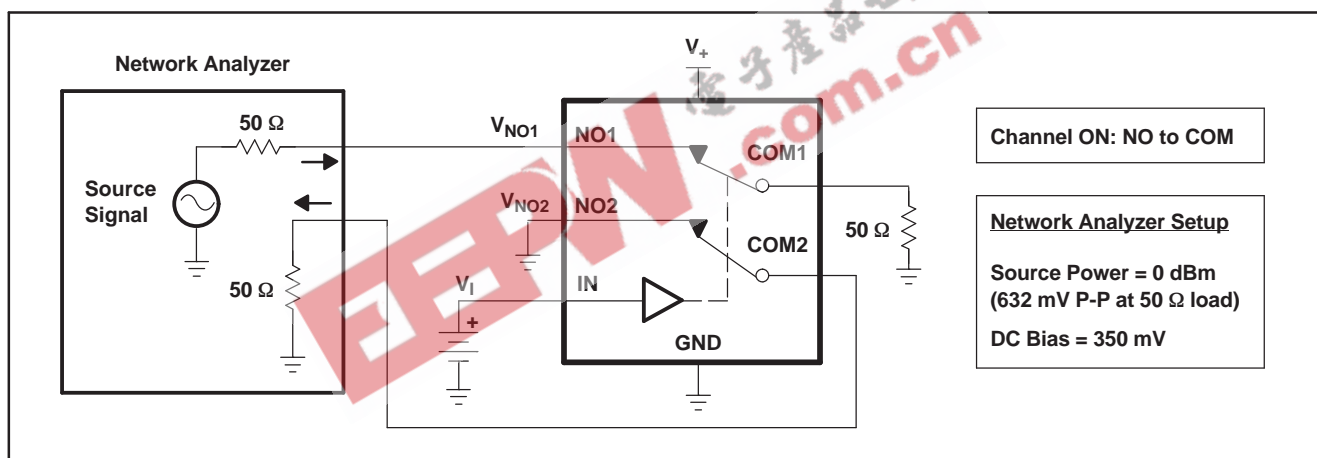


Figure 22. Crosstalk (X_{TALK})

TS5A6542
0.75-Ω SPDT ANALOG SWITCH
WITH INPUT LOGIC TRANSLATION

SCDS230–APRIL 2006


PARAMETER MEASUREMENT INFORMATION (continued)

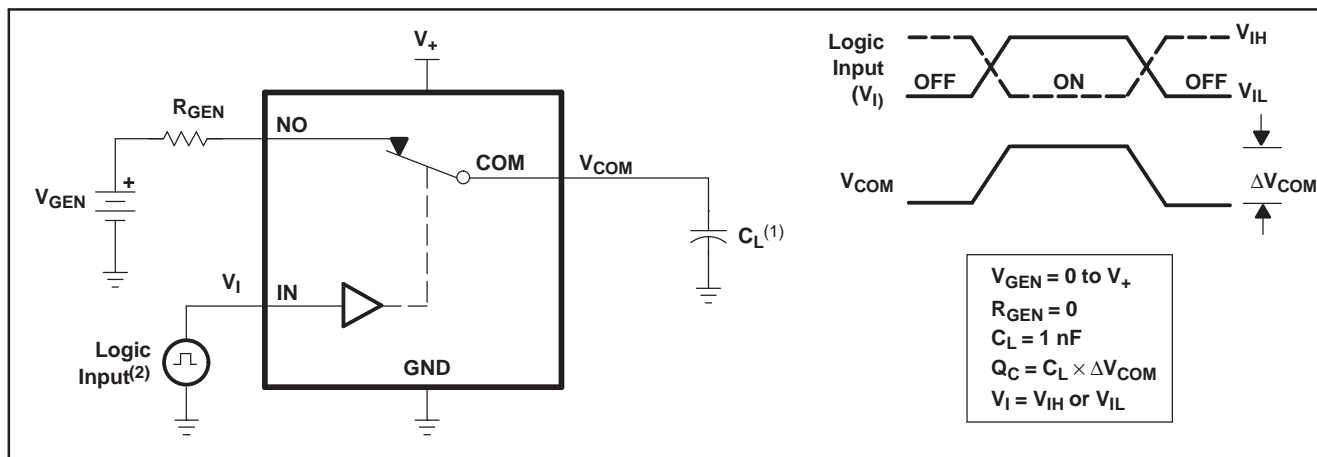

(1) C_L includes probe and jig capacitance.

(2) All input pulses are supplied by generators having the following characteristics: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r < 5 \text{ ns}$, $t_f < 5 \text{ ns}$.

Figure 23. Charge Injection (Q_C)

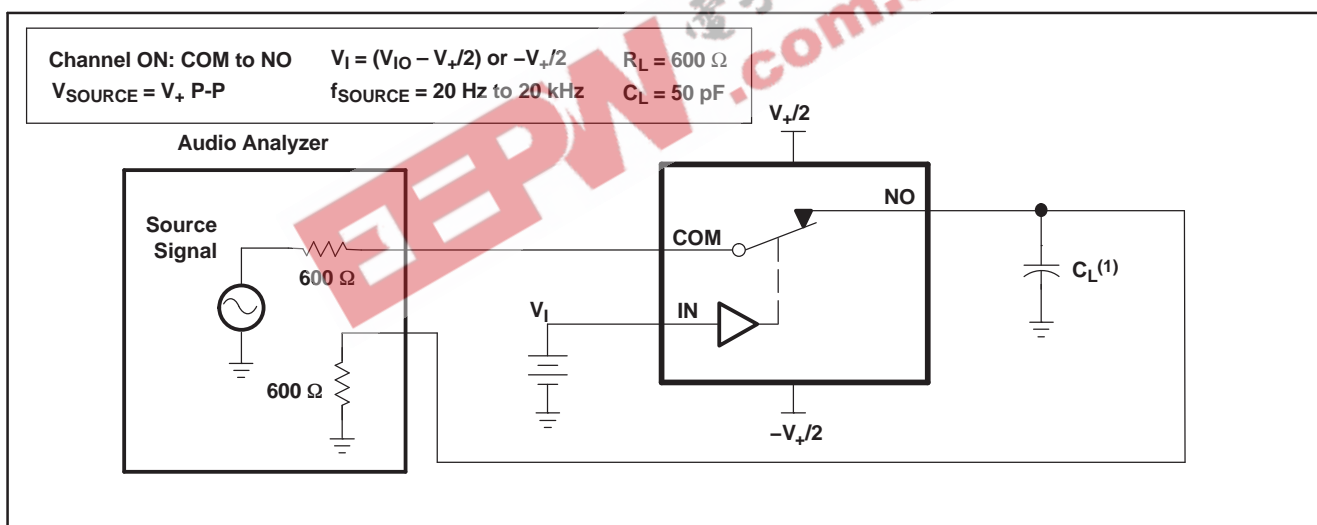

(1) C_L includes probe and jig capacitance.

Figure 24. Total Harmonic Distortion (THD)

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
TS5A6542YZPR	ACTIVE	WCSP	YZP	8	3000	Green (RoHS & no Sb/Br)	SNAGCU	Level-1-260C-UNLIM

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSELETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.


Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

MECHANICAL DATA

YZP (R-XBGA-N8)

DIE-SIZE BALL GRID ARRAY

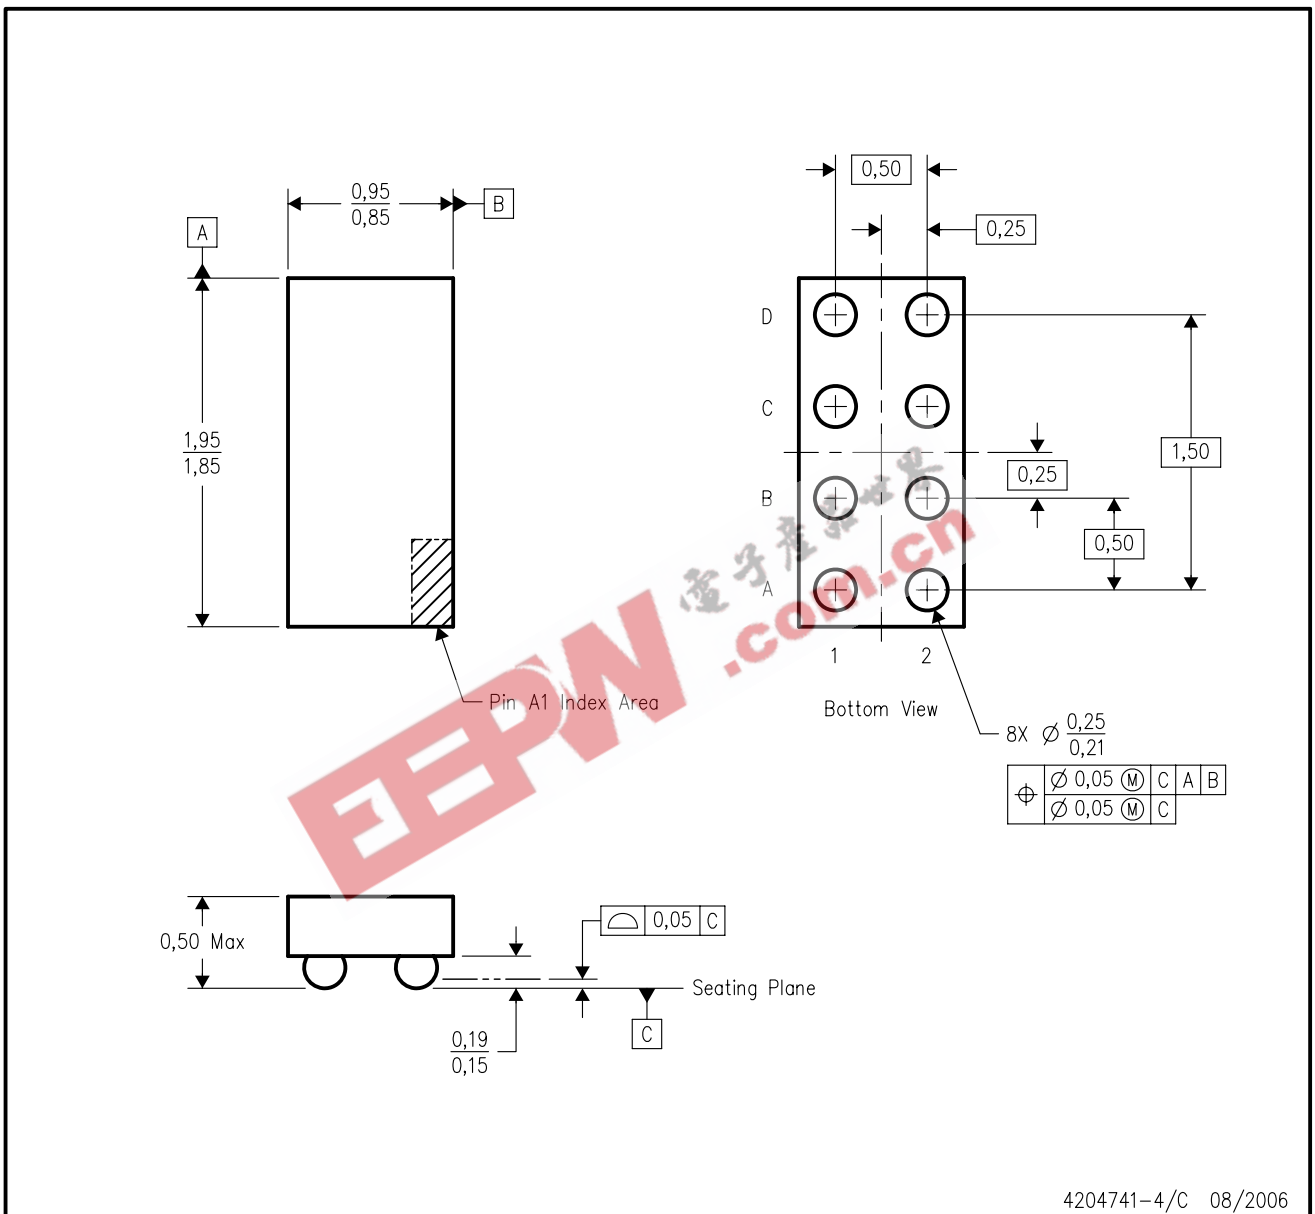

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. NanoFree™ package configuration.
 - D. This package is lead-free. Refer to the 8 YEP package (drawing 4204725) for tin-lead (SnPb).

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DSP	dsp.ti.com
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
Low Power Wireless	www.ti.com/lpw

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265