Quad 2-Channel Multiplexer

The MC74VHC157 is an advanced high speed CMOS quad 2–channel multiplexer fabricated with silicon gate CMOS technology. It achieves high speed operation similar to equivalent Bipolar Schottky TTL while maintaining CMOS low power dissipation.


It consists of four 2-input digital multiplexers with common select (S) and enable (E) inputs. When E is held High, selection of data is inhibited and all the outputs go Low.

The select decoding determines whether the A or B inputs get routed to the corresponding Y outputs.

The internal circuit is composed of three stages, including a buffer output which provides high noise immunity and stable output. The inputs tolerate voltages up to 7V, allowing the interface of 5V systems to 3V systems.

- High Speed: tpD = 4.1ns (Typ) at VCC = 5V
- Low Power Dissipation: $I_{CC} = 4\mu A$ (Max) at $T_A = 25^{\circ}C$
- High Noise Immunity: VNIH = VNIL = 28% VCC
- Power Down Protection Provided on Inputs
- · Balanced Propagation Delays
- Designed for 2V to 5.5V Operating Range
- Low Noise: Volp = 0.8V (Max)
- Pin and Function Compatible with Other Standard Logic Families
- Latchup Performance Exceeds 300mA
- ESD Performance: HBM > 2000V; Machine Model > 200V
- Chip Complexity: 82 FETs or 20 Equivalent Gates

EXPANDED LOGIC DIAGRAM

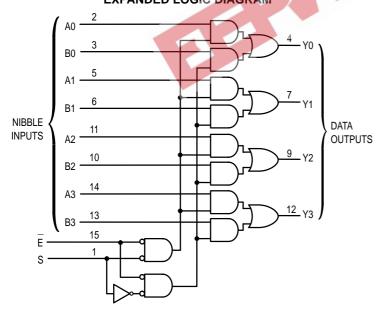

FUNCTION TABLE

Inp	outs	Outputs
E	S	Y0 – Y3
Н	Х	L
L	L	A0-A3
L	Н	B0-B3

A0 - A3, B0 - B3 = the levels of the respective Data–Word Inputs.

MC74VHC157



D SUFFIX 16–LEAD SOIC PACKAGE CASE 751B–05



16-LEAD TSSOP PACKAGE CASE 948F-01



M SUFFIX -LEAD SOIC EIAJ PACKAGE CASE 966-01

ORDERING INFORMATION

MC74VHCXXXD	SOIC
MC74VHCXXXDT	TSSOP
MC74VHCXXXM	SOIC EIAJ

MC74VHC157

MAXIMUM RATINGS*

Symbol	Parameter		Value	Unit
VCC	DC Supply Voltage	- 0.5 to + 7.0	V	
V _{in}	DC Input Voltage	- 0.5 to + 7.0	V	
V _{out}	DC Output Voltage		-0.5 to V _{CC} + 0.5	V
ΙK	Input Diode Current		- 20	mA
lok	Output Diode Current		± 20	mA
l _{out}	DC Output Current, per Pin		± 25	mA
Icc	DC Supply Current, V _{CC} and GND Pins		± 50	mA
PD	Power Dissipation in Still Air, SOIC Package TSSOP Package		500 450	mW
T _{stg}	Storage Temperature		- 65 to + 150	°C

due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation, Vin and Vout should be constrained to the range GND \leq (V_{in} or V_{out}) \leq V_{CC}. Unused inputs must always be tied to an appropriate logic voltage

level (e.g., either GND or V_{CC}). Unused outputs must be left open.

This device contains protection circuitry to guard against damage

RECOMMENDED OPERATING CONDITIONS

, 0	 SOIC Packages: – 7 mW/°C from 65° to 125°C TSSOP Package: – 6.1 mW/°C from 65° to 125°C ENDED OPERATING CONDITIONS 		27	44	en cn
Symbol	Parameter	Min	Max	Unit	
VCC	DC Supply Voltage	2.0	5.5	V	
V _{in}	DC Input Voltage	0	5.5	V	
V _{out}	DC Output Voltage	0	Vcc	V	
TA	Operating Temperature	- 40	+ 85	°C	
t _r , t _f	Input Rise and Fall Time $V_{CC} = 3.3V$ $V_{CC} = 5.0V$	0 0	100 20	ns/V	

DC ELECTRICAL CHARACTERISTICS

			VCC		T _A = 25°C		$T_A = -40$	0 to 85°C	
Symbol	Parameter	Test Conditions	v	Min	Тур	Max	Min	Max	Unit
VIH	Minimum High-Level Input Voltage		2.0 3.0 to 5.5	1.50 V _{CC} x 0.7			1.50 V _{CC} x 0.7		V
VIL	Maximum Low-Level Input Voltage		2.0 3.0 to 5.5			0.50 V _{CC} x 0.3		0.50 V _{CC} x 0.3	V
VOH	Minimum High-Level Output Voltage	V _{in} = V _{IH} or V _{IL} I _{OH} = – 50μΑ	2.0 3.0 4.5	1.9 2.9 4.4	2.0 3.0 4.5		1.9 2.9 4.4		V
		$V_{in} = V_{IH} \text{ or } V_{IL}$ $I_{OH} = -4\text{mA}$ $I_{OH} = -8\text{mA}$	3.0 4.5	2.58 3.94			2.48 3.80		
VOL	Maximum Low–Level Output Voltage	$V_{in} = V_{IH} \text{ or } V_{IL}$ $I_{OL} = 50 \mu A$	2.0 3.0 4.5		0.0 0.0 0.0	0.1 0.1 0.1		0.1 0.1 0.1	V
		$V_{in} = V_{IH}$ or V_{IL} $I_{OL} = 4mA$ $I_{OL} = 8mA$	3.0 4.5			0.36 0.36		0.44 0.44	

MOTOROLA 2

Absolute maximum continuous ratings are those values beyond which damage to the device may occur. Exposure to these conditions or conditions beyond those indicated may adversely affect device reliability. Functional operation under absolute-maximum-rated conditions is not

DC ELECTRICAL CHARACTERISTICS

			vcc	VCC T			T _A = - 40) to 85°C	
Symbol	Parameter	Test Conditions	v	Min	Тур	Max	Min	Max	Unit
l _{in}	Maximum Input Leakage Current	V _{in} = 5.5 V or GND	0 to 5.5			± 0.1		± 1.0	μΑ
ICC	Maximum Quiescent Supply Current	V _{in} = V _{CC} or GND	5.5			4.0		40.0	μА

AC ELECTRICAL CHARACTERISTICS (Input $t_f = t_f = 3.0 \text{ns}$)

					T _A = 25°C		T _A = -40) to 85°C	
Symbol	Parameter	Test Condit	ions	Min	Тур	Max	Min	Max	Unit
t _{PLH} , t _{PHL}	Maximum Propagation Delay, A or B to Y	V _{CC} = 3.3 ± 0.3 V	C _L = 15pF C _L = 50pF		6.2 8.7	9.7 13.2	1.0 1.0	11.5 15.0	ns
		V _{CC} = 5.0 ± 0.5 V	C _L = 15pF C _L = 50pF		4.1 5.6	6.4 8.4	1.0 1.0	7.5 9.5	
tPLH, tPHL	Maximum Propagation Delay, S to Y	V _{CC} = 3.3 ± 0.3 V	C _L = 15pF C _L = 50pF		8.4 10.9	13.2 16.7	1.0 1.0	15.5 19.0	ns
		$V_{CC} = 5.0 \pm 0.5 \text{ V}$	C _L = 15pF C _L = 50pF	- 4 - 30c - 3	5. 3 6.8	8.1 10.1	1.0 1.0	9.5 11.5	
tPLH, tPHL	Maximum Propagation Delay, E to Y	$V_{CC} = 3.3 \pm 0.3 \text{ V}$	C _L = 15pF C _L = 50pF	37	8. 7 11.2	13.6 17.1	1.0 1.0	16.0 19.5	ns
		V _{CC} = 5.0 ± 0.5 V	C _L = 15pF C _L = 50pF	Co.	5.6 7.1	8.6 10.6	1.0 1.0	10.0 12.0	
C _{in}	Maximum Input Capacitance				4	10		10	pF

ſ			Typical @ 25°C, V _{CC} = 5.0V	
	C_{PD}	Power Dissipation Capacitance (Note 1.)	20	pF

^{1.} C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation: I_{CC(OPR)} = C_{PD} • V_{CC} • f_{in} + I_{CC}. C_{PD} is used to determine the no–load dynamic power consumption; P_D = C_{PD} • V_{CC} • f_{in} + I_{CC} • V_{CC}.

NOISE CHARACTERISTICS (Input $t_f = t_f = 3.0 \text{ns}$, $C_L = 50 \text{pF}$, $V_{CC} = 5.0 \text{V}$)

		T _A = 25°C		
Symbol	Characteristic	Тур	Max	Unit
V _{OLP}	Quiet Output Maximum Dynamic V _{OL}	0.3	0.8	٧
V _{OLV}	Quiet Output Minimum Dynamic V _{OL}	- 0.3	- 0.8	V
VIHD	Minimum High Level Dynamic Input Voltage		3.5	V
VILD	Maximum Low Level Dynamic Input Voltage		1.5	V

3


MOTOROLA

SWITCHING WAVEFORMS



Figure 1. Switching Waveform

Figure 2. Inverting Switching



* Includes all probe and jig capacitance

Figure 3. Test Circuit

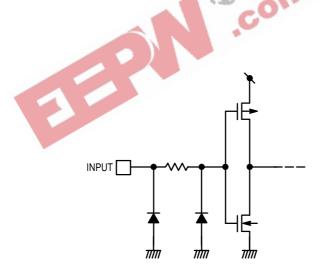


Figure 4. Input Equivalent Circuit

MOTOROLA 4

INCHES

0.054 0.068

0.008 0.009

0.004 0.009

 MAX
 MIN
 MAX

 10.00
 0.386
 0.393

 4.00
 0.150
 0.157

0.016


0°


0.25

0.25

6.20


OUTLINE DIMENSIONS

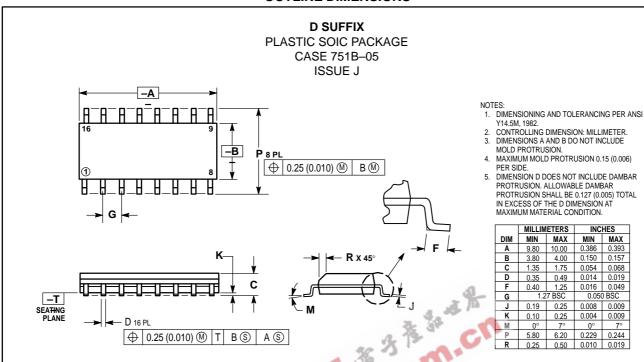

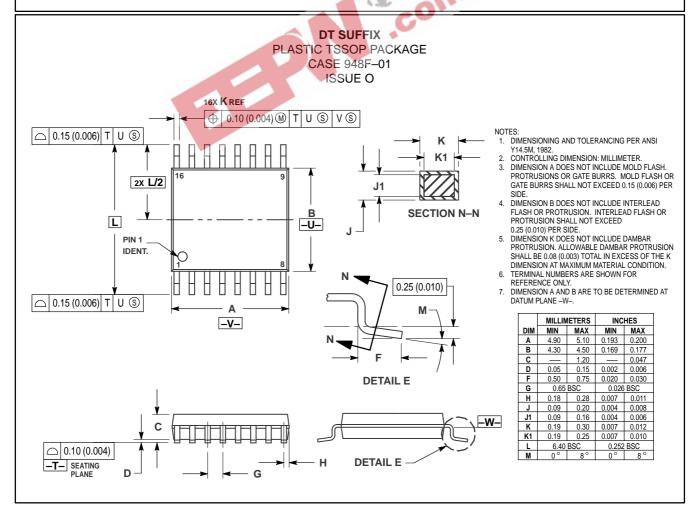

5

OUTLINE DIMENSIONS

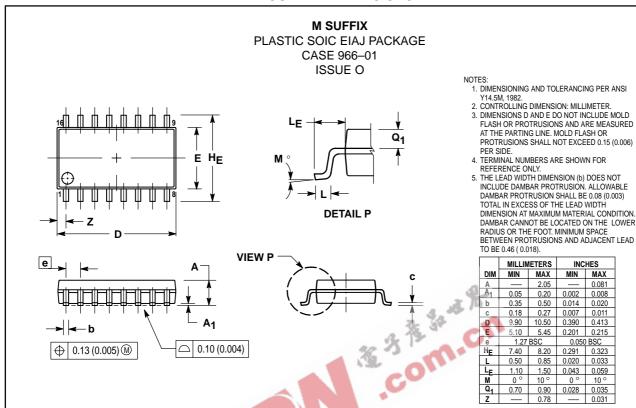

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury $or death\,may\,occur.\,Should\,Buyer\,pur chase\,or\,use\,Motorola\,products\,for\,any\,such\,unintended\,or\,unauthorized\,application,\,Buyer\,shall\,indemnify\,and\,hold\,Motorola\,pulling\,application,\,Buyer\,shall\,indemnify\,and\,hold\,Motorola\,pulling\,application,\,Buyer\,shall\,indemnify\,and\,hold\,Motorola\,pulling\,application,\,Buyer\,shall\,indemnify\,and\,hold\,Motorola\,pulling\,application,\,Buyer\,shall\,indemnify\,and\,hold\,Motorola\,pulling\,application,\,Buyer\,shall\,indemnify\,and\,hold\,Motorola\,pulling\,application,\,Buyer\,shall\,indemnify\,and\,hold\,Motorola\,pulling\,application,\,Buyer\,shall\,indemnify\,and\,hold\,Motorola\,pulling\,application,\,Buyer\,shall\,indemnify\,and\,hold\,Motorola\,pulling\,application,\,Buyer\,shall\,indemnify\,and\,hold\,Motorola\,pulling\,application,\,Buyer\,shall\,indemnify\,and\,hold\,Motorola\,pulling\,application,\,Buyer\,shall\,indemnify\,and\,hold\,Motorola\,pulling\,application,\,Buyer\,shall\,indemnify\,and\,hold\,Motorola\,pulling\,application,\,Buyer\,shall\,indemnify\,application,\,Buyer\,shal$ and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

INCHES

MIN MAX 0.081 0.008

0.014 0.020

0.201 0.215

0.291 0.323

0.390

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 5405, Denver, Colorado 80217. 303-675-2140 or 1-800-441-2447 JAPAN: Nippon Motorola Ltd.: SPD, Strategic Planning Office, 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan. 81-3-5487-8488

Mfax™: RMFAX0@email.sps.mot.com - TOUCHTONE 602-244-6609 - US & Canada ONLY 1-800-774-1848

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

INTERNET: http://motorola.com/sps



MC74VHC157/D