


THIS DOCUMENT AND THE DATA DISCLOSED
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,
USED, OR DISCLOSED IN WHOLE OR IN PART
TO ANYONE WITHOUT PERMISSION OF VICO CORP.

ELECTRICAL CHARACTERISTICS

RATED VOLTAGE:	250 VAC, 50/60 HZ
CAPACITANCE:	1500 pF ± 20%
DISSIPATION FACTOR:	≤ 1.3 MEASURED AT 1 KHZ
MAXIMUM PULSE RISE TIME:	du/dt 2000V / μSEC
DIELECTRIC:	METALLIZED PAPER
TEST VDLTAGE:	(ELECTRODE/ELECTRODE) 2700 VDC 1 SEC
INSULATION RESISTANCE:	120000 MΩ 500 VDC 1 MIN.
COATING:	PLASTIC CAN, EPOXY RESIN SEALED, FLAME RETARDANT

NOTES:
1. APPROVALS INCLUDE VDE, SEV, DEMKO, SEMKO, NEMKO,
UL, IMQ, DVE, DEMKO, EL, CSA.

LTR.	DESCRIPTION	DATE	APP'D.
1	RELEASED PER ECO #2212	JTW 10/11/90	BJR
2	REVISED PER E910258	JTW 5/14/91	BJR

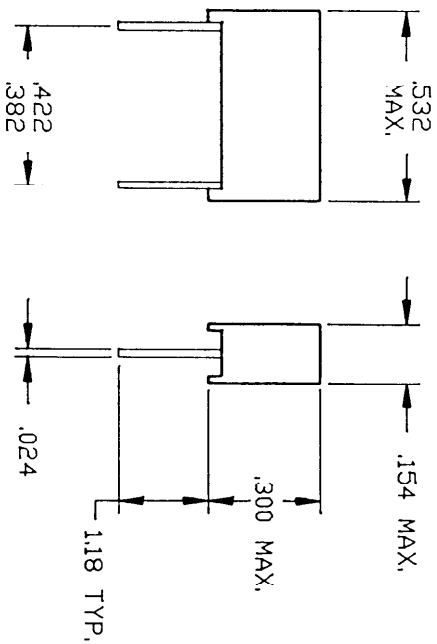

COPY

VICO CORP.
ONE VICO STATION
VICTOR, MA 01909

DRAWN J. WITTEK		9/90	
CHECKED			
APPR		5/91	
ALL DIMENSIONS ARE IN INCHES (MILLIMETERS)			
DO NOT SCALE DRAWING			
NEXT ASSY:		SCALE 2X	
VICO R ANDOVER, MA, U.S.A.		AG-PAPER-CAPACITOR	
		1500pF, 250 VAC, (Y)	
TOLERANCES (UNLESS AS NOTED)		DRAWING NO.	
.XX ± .01		00770	
.XXX ± .005		REV.	
FRACT ± 1/100		2	
ANGLES ± 10		SHEET 1 OF 1	