



**POWER MATE
TECHNOLOGY CO.,LTD.**

FDC10-SERIES



UL E193009
TUV R2054609
CB JPTUV-001422
CE MARK

- 10 WATTS OUTPUT POWER
- 2:1 AND 4:1 WIDE INPUT VOLTAGE RANGE
- INTERNATIONAL SAFETY STANDARD APPROVAL
- SIX-SIDED CONTINUOUS SHIELD
- HIGH EFFICIENCY UP TO 86%
- STANDARD 2" X 1" X 0.4" PACKAGE
- FIXED SWITCHING FREQUENCY

The FDC10 and FDC10-W series offer 10 watts of output power from a 2 x 1 x 0.4 inch package. FDC10 series have 2 : 1 wide input voltage of 9-18, 18-36 and 36-75VDC. FDC10-W series have 4:1 ultra wide input voltage of 9-36 and 18-75VDC. The FDC10 and FDC10-W features 1600VDC of isolation, short-circuit and over-voltage protection, as well as six sided shielding. The safety approval of EN60950 and UL1950. All models are particularly suited to telecommunications, industrial, mobile telecom and test equipment applications. According the extended operation temperature range, there are "M1" and "M2" version for special application.

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted.

OUTPUT SPECIFICATIONS			
Output power		10 Watts max	
Voltage accuracy	Full load and nominal Vin	± 2%	
Minimum load (Note 1)		10% of FL	
Line regulation	LL to HL at Full Load	± 1%	
Load regulation	10% to 100% FL	Single	± 1%
		Dual	± 2%
Cross regulation	Asymmetrical load 25% / 100% FL	± 5%	
Ripple and noise	20MHz bandwidth	Single	50mVp-p
		Dual	75mVp-p
Temperature coefficient		±0.02% / °C, max	
Transient response recovery time 25% load step change		500uS	
Over voltage protection	3.3V output	3.9V	
	5V output	6.2V	
	Zener diode clamp	12V output	15V
	15V output	18V	
Over load protection	% of FL at nominal input	150% typ	
Short circuit protection		Hiccup, automatics recovery	
INPUT SPECIFICATIONS			
Input voltage range	FDC10	12V nominal input	9 – 18VDC
		24V nominal input	18 – 36VDC
		48V nominal input	36 – 75VDC
	FDC10-W	24V nominal input	9 – 36VDC
		48V nominal input	18 – 75VDC
Input filter		Pi type	
Input surge voltage 100mS max	12V input	36VDC	
	24V input	50VDC	
	48V input	100VDC	
Input reflected ripple (Note 2) Nominal Vin and full load		30mA _{p-p}	
Start up time	Nominal Vin and constant resistor load		20mS typ
Remote ON/OFF (Note 3)			
(Positive logic)	DC-DC ON	Open or 3.5V < Vr < 12V	
	DC-DC OFF	Short or 0V < Vr < 1.2V	
(Negative logic)	DC-DC ON	Short or 0V < Vr < 1.2V	
	DC-DC OFF	Open or 3.5V < Vr < 12V	
Remote off input current	Nominal Vin		2.5mA

GENERAL SPECIFICATIONS			
Efficiency	See table		
Isolation voltage	1600VDC, min		
Isolation resistance	10 ⁹ ohms, min		
Isolation capacitance	300pF, max		
Switching frequency	300KHz, typ		
Approvals and standard	IEC60950, UL1950, EN60950		
Case material	Nickel-coated copper		
Base material	Non-conductive black plastic		
Potting material	Epoxy (UL94-V0)		
Dimensions	2.00 X 1.00 X 0.40 Inch (50.8 X 25.4 X 10.2 mm)		
Weight	27g (0.95oz)		
MTBF (Note 4)	1.976 x 10 ⁶ hrs		
ENVIRONMENTAL SPECIFICATIONS			
Operating temperature range (Reference derating curve)	Standard	-25°C ~ +85°C (with derating)	
	M1 (Note 5)	-40°C ~ +85°C (non-derating)	
	M2 (W series)	-40°C ~ +85°C (with derating)	
Maximum case temperature	+100°C		
Storage temperature range	-55°C ~ +105°C		
Thermal impedance (Note 6)	Nature convection	12°C/watt	
	Nature convection with heat-sink	10°C/watt	
Thermal shock	MIL-STD-810D		
Vibration	10~55Hz, 2G, 30minutes along X,Y and Z		
Relative humidity	5% to 95% RH		
EMC CHARACTERISTICS			
Conducted emissions	EN55022	Level A	
Radiated emissions	EN55022	Level A	
ESD	EN61000-4-2	Perf. Criteria2	
Radiated immunity	EN61000-4-3	Perf. Criteria2	
Fast transient	EN61000-4-4	Perf. Criteria2	
Surge	EN61000-4-5	Perf. Criteria2	
Conducted immunity	EN61000-4-6	Perf. Criteria2	



**POWER MATE
TECHNOLOGY CO.,LTD.**

10 WATTS DC-DC CONVERTER






Model Number	Input Range	Output Voltage	Output Current	Input Current ⁽⁷⁾	Eff ⁽⁸⁾ (%)	Capacitor Load max ⁽⁹⁾
FDC10-12S33	9 – 18 VDC	3.3 VDC	2000mA	724mA	80	6800uF
FDC10-12S05	9 – 18 VDC	5 VDC	2000mA	1082mA	81	4700uF
FDC10-12S12	9 – 18 VDC	12 VDC	830mA	1064mA	82	690uF
FDC10-12S15	9 – 18 VDC	15 VDC	670mA	1088mA	81	470uF
FDC10-12D05	9 – 18 VDC	± 5 VDC	± 1000mA	1068mA	82	± 680uF
FDC10-12D12	9 – 18 VDC	± 12 VDC	± 416mA	1053mA	83	± 330uF
FDC10-12D15	9 – 18 VDC	± 15 VDC	± 333mA	1041mA	84	± 110uF
FDC10-24S33	18 – 36 VDC	3.3 VDC	2000mA	362mA	80	6800uF
FDC10-24S05 (W)	18 – 36 (9 – 36) VDC	5 VDC	2000mA	534 (548mA)	82 (80)	4700uF
FDC10-24S12 (W)	18 – 36 (9 – 36) VDC	12 VDC	830mA	519 (532mA)	84 (82)	690uF
FDC10-24S15 (W)	18 – 36 (9 – 36) VDC	15 VDC	670mA	523 (551mA)	84 (80)	470uF
FDC10-24D05 (W)	18 – 36 (9 – 36) VDC	± 5 VDC	± 1000mA	548 (548mA)	80 (80)	± 680uF
FDC10-24D12 (W)	18 – 36 (9 – 36) VDC	± 12 VDC	± 416mA	520 (547mA)	84 (80)	± 330uF
FDC10-24D15 (W)	18 – 36 (9 – 36) VDC	± 15 VDC	± 333mA	520 (548mA)	84 (80)	± 110uF
FDC10-48S33	36 – 75 VDC	3.3 VDC	2000mA	183mA	79	6800uF
FDC10-48S05 (W)	36 – 75 (18 – 75) VDC	5 VDC	2000mA	260 (274mA)	84 (80)	4700uF
FDC10-48S12 (W)	36 – 75 (18 – 75) VDC	12 VDC	830mA	253 (259mA)	86 (84)	690uF
FDC10-48S15 (W)	36 – 75 (18 – 75) VDC	15 VDC	670mA	258 (262mA)	85 (84)	470uF
FDC10-48D05 (W)	36 – 75 (18 – 75) VDC	± 5 VDC	± 1000mA	267 (271mA)	82 (81)	± 680uF
FDC10-48D12 (W)	36 – 75 (18 – 75) VDC	± 12 VDC	± 416mA	254 (281mA)	86 (78)	± 330uF
FDC10-48D15 (W)	36 – 75 (18 – 75) VDC	± 15 VDC	± 333mA	260 (270mA)	84 (81)	± 110uF

Note

- The FDC10 (W) series required a minimum 10% loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification
- Simulated source impedance of 12uH. 12uH inductor in series with +Vin.
- The ON/OFF control is option function. There are positive logic and negative logic. The pin voltage is referenced to negative input
To order positive logic ON-OFF control add the suffix-P (Ex: FDC10-24S05-P)
To order negative logic ON-OFF control add the suffix-N (Ex: FDC10-24S05-N)
- BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40°C. (Ground fixed and controlled environment)
- M1 version is more efficient, therefore, it can be operated in a more extensive temperature range than standard and M2 version.
- Heat sink is optional and P/N: 7G-0020A.
- Maximum value at nominal input voltage and full load of standard type.
- Typical value at nominal input voltage and full load.
- Test by minimum Vin and constant resistor load.

PIN CONNECTION

PIN	SINGLE	DUAL
1	+ INPUT	+ INPUT
2	- INPUT	- INPUT
3	+ OUTPUT	+ OUTPUT
4	NO PIN	COMMON
5	- OUTPUT	- OUTPUT
6	CTRL (Option)	CTRL (Option)

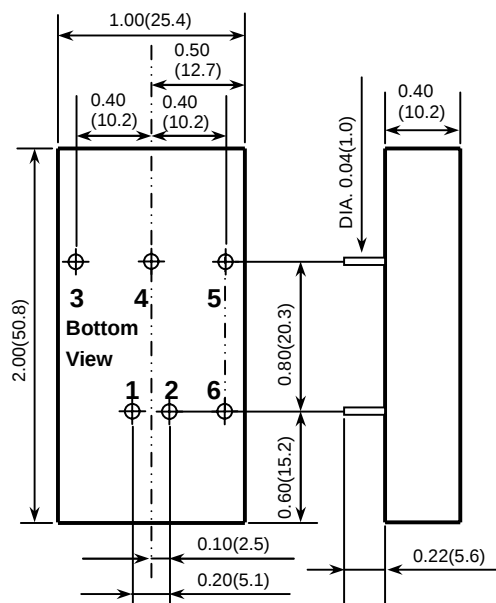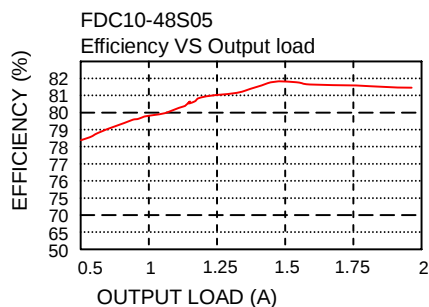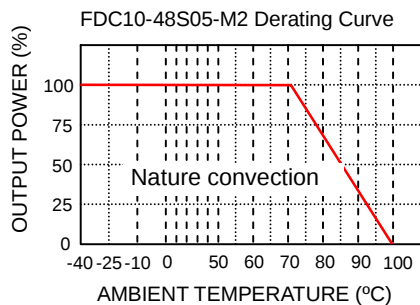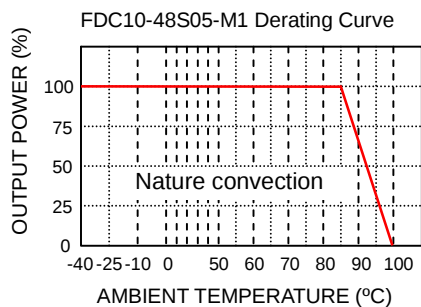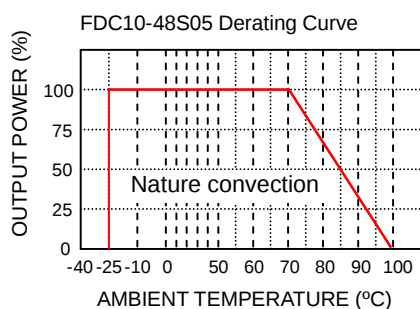

- All dimensions in Inches (mm)
- Pin Pitch tolerance $\pm 0.014(0.35)$