



March 1998  
Revised October 2004

## 74VCX16501

# Low Voltage 18-Bit Universal Bus Transceivers with 3.6V Tolerant Inputs and Outputs

### General Description

The VCX16501 is an 18-bit universal bus transceiver which combines D-type latches and D-type flip-flops to allow data flow in transparent, latched, and clocked modes.

Data flow in each direction is controlled by output-enable (OEAB and OEBA), latch-enable (LEAB and LEBA), and clock (CLKAB and CLKBA) inputs. For A-to-B data flow, the device operates in the transparent mode when LEAB is HIGH. When LEAB is LOW, the A data is latched if CLKAB is held at a HIGH or LOW logic level. If LEAB is LOW, the A bus data is stored in the latch/flip-flop on the LOW-to-HIGH transition of CLKAB. When OEAB is HIGH, the outputs are active. When OEAB is LOW, the outputs are in a high-impedance state.

Data flow for B to A is similar to that of A to B but uses OEBA, LEBA, and CLKBA. The output enables are complementary (OEAB is active HIGH and OEBA is active LOW).

The VCX16501 is designed for low voltage (1.4V to 3.6V) V<sub>CC</sub> applications with I/O capability up to 3.6V.

The VCX16501 is fabricated with an advanced CMOS technology to achieve high speed operation while maintaining low CMOS power dissipation.

### Features

- 1.4V to 3.6V V<sub>CC</sub> supply operation
- 3.6V tolerant inputs and outputs
- t<sub>PD</sub> (A to B, B to A)  
2.9 ns max for 3.0V to 3.6V V<sub>CC</sub>
- Power-down high impedance inputs and outputs
- Supports live insertion/withdrawal (Note 1)
- Static Drive (I<sub>OH</sub>/I<sub>OL</sub>)  
±24 mA @ 3.0V V<sub>CC</sub>
- Uses patented noise/EMI reduction circuitry
- Latchup performance exceeds 300 mA
- ESD performance:  
Human body model > 2000V  
Machine model >200V


**Note 1:** To ensure the high-impedance state during power up or power down, OEBA should be tied to V<sub>CC</sub> through a pull-up resistor and OEAB should be tied to GND through a pull-down resistor; the minimum value of the resistors is determined by the current-sourcing capability of the driver.

### Ordering Code:

Order Number	Package Number	Package Description
74VCX16501MTD	MTD56	56-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide

Devices also available on Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

## Connection Diagram

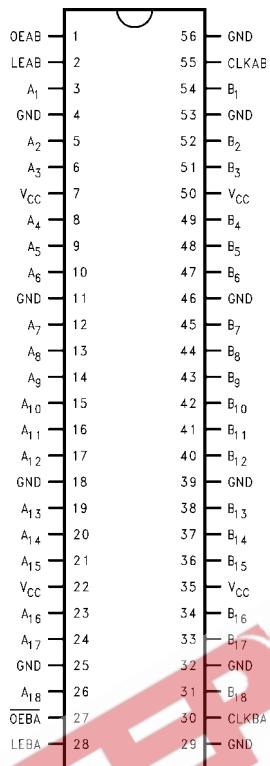

## Pin Descriptions

Pin Names	Description
OEAB	Output Enable Input for A to B Direction (Active HIGH)
OEBA	Output Enable Input for B to A Direction (Active LOW)
LEAB, LEBA	Latch Enable Inputs
CLKAB, CLKBA	Clock Inputs
A <sub>1</sub> -A <sub>18</sub>	Side A Inputs or 3-STATE Outputs
B <sub>1</sub> -B <sub>18</sub>	Side B Inputs or 3-STATE Outputs

## Function Table (Note 2)

Inputs				Outputs
OEAB	LEAB	CLKAB	A <sub>n</sub>	B <sub>n</sub>
L	X	X	X	Z
H	H	X	L	L
H	H	X	H	H
H	L	↑	L	L
H	L	↑	H	H
H	L	H	X	B <sub>0</sub> (Note 3)
H	L	L	X	B <sub>0</sub> (Note 4)

H = HIGH Voltage Level

L = LOW Voltage Level


X = Immaterial (HIGH or LOW, inputs may not float)

Z = High Impedance

**Note 2:** A-to-B data flow is shown; B-to-A flow is similar but uses  $\overline{OEBA}$ , LEBA and CLKBA. OEBA is active LOW.

**Note 3:** Output level before the indicated steady-state input conditions were established.

**Note 4:** Output level before the indicated steady-state input conditions were established, provided that CLKAB was HIGH before LEAB went LOW.

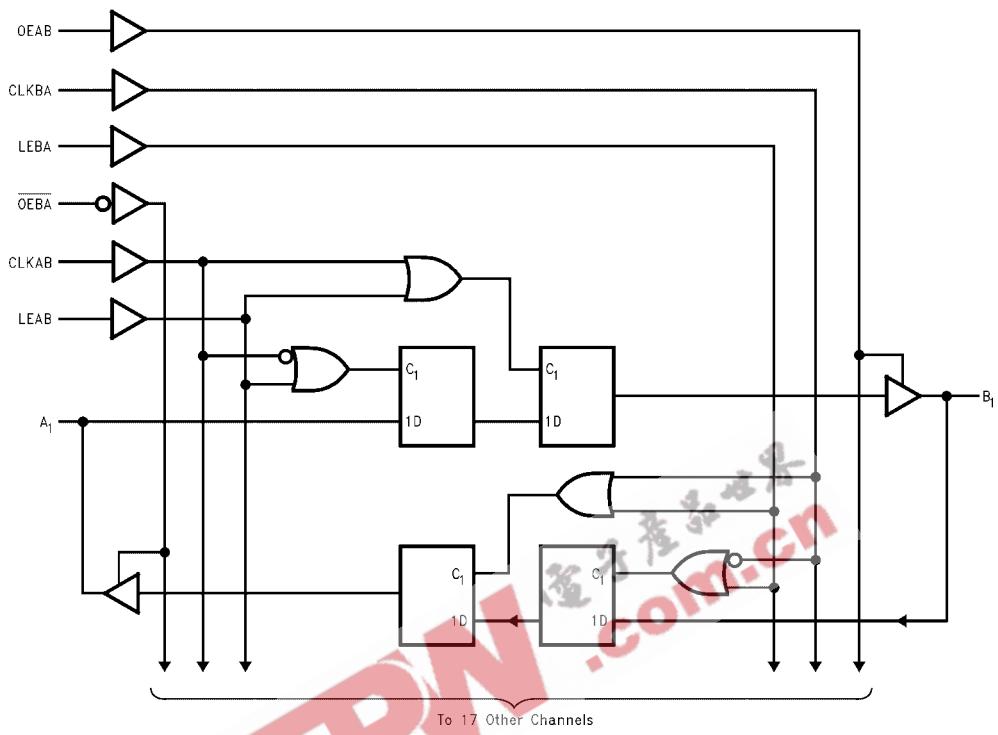**Logic Diagram**

<b>Absolute Maximum Ratings</b> <sup>(Note 5)</sup>		<b>Recommended Operating Conditions</b> <sup>(Note 7)</sup>				
Supply Voltage ( $V_{CC}$ )	-0.5V to +4.6V	Power Supply				
DC Input Voltage ( $V_I$ )	-0.5V to +4.6V	Operating	1.4V to 3.6V			
Output Voltage ( $V_O$ )		Input Voltage	-0.3V to 3.6V			
Outputs 3-STATED	-0.5V to +4.6V	Output Voltage ( $V_O$ )				
Outputs Active (Note 6)	-0.5 to $V_{CC} + 0.5V$	Output in Active States	0V to $V_{CC}$			
DC Input Diode Current ( $I_{IK}$ ) $V_I < 0V$	-50 mA	Output in 3-STATE	0.0V to 3.6V			
DC Output Diode Current ( $I_{OK}$ )		Output Current in $I_{OH}/I_{OL}$				
$V_O < 0V$	-50 mA	$V_{CC} = 3.0V$ to 3.6V	$\pm 24$ mA			
$V_O > V_{CC}$	+50 mA	$V_{CC} = 2.3V$ to 2.7V	$\pm 18$ mA			
DC Output Source/Sink Current ( $I_{OH}/I_{OL}$ )	$\pm 50$ mA	$V_{CC} = 1.65V$ to 2.3V	$\pm 6$ mA			
DC $V_{CC}$ or Ground Current per Supply Pin ( $I_{CC}$ or Ground)	$\pm 100$ mA	$V_{CC} = 1.4V$ to 1.6V	$\pm 2$ mA			
Storage Temperature Range ( $T_{STG}$ )	-65°C to +150°C	Free Air Operating Temperature ( $T_A$ )	-40°C to +85°C			
		Minimum Input Edge Rate ( $\Delta t/\Delta V$ )				
		$V_{IN} = 0.8V$ to 2.0V, $V_{CC} = 3.0V$	10 ns/V			
<b>Note 5:</b> The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the Absolute Maximum Ratings. The Recommended Operating Conditions tables will define the conditions for actual device operation.						
<b>Note 6:</b> $I_0$ Absolute Maximum Rating must be observed.						
<b>Note 7:</b> Floating or unused pin (inputs or I/O's) must be held HIGH or LOW.						
<b>DC Electrical Characteristics</b>						
Symbol	Parameter	Conditions	$V_{CC}$ (V)	Min	Max	Units
$V_{IH}$	HIGH Level Input Voltage		2.7 - 3.6 2.3 - 2.7 1.65 - 2.3 1.4 - 1.6	2.0 1.6 0.65 x $V_{CC}$ 0.65 x $V_{CC}$		V
$V_{IL}$	LOW Level Input Voltage		2.7 - 3.6 2.3 - 2.7 1.65 - 2.3 1.4 - 1.6		0.8 0.7 0.35 x $V_{CC}$ 0.35 x $V_{CC}$	V
$V_{OH}$	HIGH Level Output Voltage	$I_{OH} = -100 \mu A$	2.7 - 3.6	$V_{CC} - 0.2$		V
		$I_{OH} = -12 mA$	2.7	2.2		
		$I_{OH} = -18 mA$	3.0	2.4		
		$I_{OH} = -24 mA$	3.0	2.2		
		$I_{OH} = -100 \mu A$	2.3 - 2.7	$V_{CC} - 0.2$		
		$I_{OH} = -6 mA$	2.3	2.0		V
		$I_{OH} = -12 mA$	2.3	1.8		
		$I_{OH} = -18 mA$	2.3	1.7		
		$I_{OH} = -100 \mu A$	1.65 - 2.3	$V_{CC} - 0.2$		
		$I_{OH} = -6 mA$	1.65	1.25		V
		$I_{OH} = -100 \mu A$	1.4 - 1.6	$V_{CC} - 0.2$		
		$I_{OH} = -12 mA$	1.4	1.05		V

**DC Electrical Characteristics** (Continued)

Symbol	Parameter	Conditions	V <sub>CC</sub> (V)	Min	Max	Units
V <sub>OL</sub>	LOW Level Output Voltage	I <sub>OL</sub> = 100 µA	2.7 - 3.6		0.2	V
		I <sub>OL</sub> = 12 mA	2.7		0.4	
		I <sub>OL</sub> = 18 mA	3.0		0.4	
		I <sub>OL</sub> = 24 mA	3.0		0.55	
	I <sub>OL</sub> = 100 µA	I <sub>OL</sub> = 100 µA	2.3 - 2.7		0.2	
		I <sub>OL</sub> = 12 mA	2.3		0.4	
		I <sub>OL</sub> = 18 mA	2.3		0.6	
	I <sub>OL</sub> = 100 µA	I <sub>OL</sub> = 100 µA	1.65 - 2.3		0.2	
		I <sub>OL</sub> = 6 mA	1.65		0.3	
	I <sub>OL</sub> = 100 µA	I <sub>OL</sub> = 100 µA	1.4 - 1.6		0.2	
		I <sub>OL</sub> = 2 mA	1.4		0.35	
I <sub>I</sub>	Input Leakage Current	0V ≤ V <sub>I</sub> ≤ 3.6V	1.4 - 3.6		±5.0	µA
I <sub>OZ</sub>	3-STATE Output Leakage	0V ≤ V <sub>O</sub> ≤ 3.6V V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>	1.4 - 3.6		±10.0	µA
I <sub>OFF</sub>	Power Off Leakage Current	0V ≤ (V <sub>I</sub> , V <sub>O</sub> ) ≤ 3.6V	0		10.0	µA
I <sub>CC</sub>	Quiescent Supply Current	V <sub>I</sub> = V <sub>CC</sub> or GND V <sub>CC</sub> ≤ (V <sub>I</sub> , V <sub>O</sub> ) ≤ 3.6V (Note 8)	1.4 - 3.6 1.4 - 3.6		20.0 ±20.0	µA
ΔI <sub>CC</sub>	Increase in I <sub>CC</sub> per Input	V <sub>IH</sub> = V <sub>CC</sub> - 0.6V	2.7 - 3.6		750	µA

Note 8: Outputs disabled or 3-STATE only.

### AC Electrical Characteristics (Note 9)

Symbol	Parameter	Conditions	$V_{CC}$ (V)	$T_A = -40^\circ C$ to $+85^\circ C$		Units	Figure Number
				Min	Max		
$f_{MAX}$	Maximum Clock Frequency	$C_L = 30 \text{ pF}$	$3.3 \pm 0.3$	250		MHz	
			$2.5 \pm 0.2$	200			
			$1.8 \pm 0.15$	100			
		$C_L = 15 \text{ pF}$	$1.5 \pm 0.1$	80.0			
$t_{PHL}$ $t_{PLH}$	Propagation Delay	$C_L = 30 \text{ pF}, R_L = 500\Omega$	$3.3 \pm 0.3$	0.6	2.9	ns	Figures 1, 2
			$2.5 \pm 0.2$	0.8	3.5		Figures 7, 8
			$1.8 \pm 0.15$	1.5	7.0		Figures 1, 2
		$C_L = 15 \text{ pF}, R_L = 2\text{k}\Omega$	$1.5 \pm 0.1$	1.0	14.0		Figures 7, 8
$t_{PHL}$ $t_{PLH}$	Propagation Delay Clock-to-Bus	$C_L = 15 \text{ pF}, R_L = 500\Omega$	$3.3 \pm 0.3$	0.6	3.5	ns	Figures 1, 2
			$2.5 \pm 0.2$	0.8	4.4		Figures 7, 8
			$1.8 \pm 0.15$	1.5	8.8		Figures 1, 2
		$C_L = 15 \text{ pF}, R_L = 500\Omega$	$1.5 \pm 0.1$	1.0	17.6		Figures 7, 8
$t_{PHL}$ $t_{PLH}$	Propagation Delay LE-to-Bus	$C_L = 30 \text{ pF}, R_L = 500\Omega$	$3.3 \pm 0.3$	0.6	3.8	ns	Figures 1, 2
			$2.5 \pm 0.2$	0.8	4.9		Figures 7, 8
			$1.8 \pm 0.15$	1.5	9.8		Figures 1, 2
		$C_L = 15 \text{ pF}, R_L = 500\Omega$	$1.5 \pm 0.1$	1.0	19.6		Figures 7, 8
$t_{PZL}$ $t_{PZH}$	Output Enable Time	$C_L = 30 \text{ pF}, R_L = 500\Omega$	$3.3 \pm 0.3$	0.6	3.8	ns	Figures 1, 3, 4
			$2.5 \pm 0.2$	0.8	4.9		Figures 7, 9, 10
			$1.8 \pm 0.15$	1.5	9.8		Figures 1, 3, 4
		$C_L = 15 \text{ pF}, R_L = 2\text{k}\Omega$	$1.5 \pm 0.1$	1.0	19.6		Figures 7, 9, 10
$t_{PLZ}$ $t_{PHZ}$	Output Disable Time	$C_L = 30 \text{ pF}, R_L = 500\Omega$	$3.3 \pm 0.3$	0.8	3.7	ns	Figures 1, 3, 4
			$2.5 \pm 0.2$	0.8	4.2		Figures 7, 9, 10
			$1.8 \pm 0.15$	0.8	7.6		Figures 1, 3, 4
		$C_L = 15 \text{ pF}, R_L = 2\text{k}\Omega$	$1.5 \pm 0.1$	1.0	15.2		Figures 7, 9, 10
$t_S$	Setup Time	$C_L = 30 \text{ pF}, R_L = 500\Omega$	$3.3 \pm 0.3$	1.5		ns	Figures 1, 6
			$2.5 \pm 0.2$	1.5			Figures 6, 7
			$1.8 \pm 0.15$	2.5			Figures 6, 7
		$C_L = 15 \text{ pF}, R_L = 500\Omega$	$1.5 \pm 0.1$	3.0			Figures 6, 7
$t_H$	Hold Time	$C_L = 30 \text{ pF}, R_L = 500\Omega$	$3.3 \pm 0.3$	1.0		ns	Figures 1, 6
			$2.5 \pm 0.2$	1.0			Figures 6, 7
			$1.8 \pm 0.15$	1.0			Figures 6, 7
		$C_L = 15 \text{ pF}, R_L = 500\Omega$	$1.5 \pm 0.1$	2.0			Figures 6, 7
$t_W$	Pulse Width	$C_L = 30 \text{ pF}, R_L = 500\Omega$	$3.3 \pm 0.3$	1.5		ns	Figures 1, 5
			$2.5 \pm 0.2$	1.5			Figures 5, 7
			$1.8 \pm 0.15$	4.0			Figures 5, 7
		$C_L = 15 \text{ pF}, R_L = 500\Omega$	$1.5 \pm 0.1$	4.0			Figures 5, 7
$t_{OSHL}$ $t_{OSLH}$	Output-to-Output Skew (Note 10)	$C_L = 30 \text{ pF}, R_L = 500\Omega$	$3.3 \pm 0.3$		0.5	ns	
			$2.5 \pm 0.2$		0.5		
			$1.8 \pm 0.15$		0.75		
		$C_L = 15 \text{ pF}, R_L = 2\text{k}\Omega$	$1.5 \pm 0.1$		1.5		

Note 9: For  $C_L = 50\text{pF}$ , add approximately 300ps to the AC maximum specification.

Note 10: Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW ( $t_{OSHL}$ ) or LOW-to-HIGH ( $t_{OSLH}$ ).


### Dynamic Switching Characteristics

Symbol	Parameter	Conditions	V <sub>CC</sub> (V)	T <sub>A</sub> = +25°C	Units
				Typical	
V <sub>OLP</sub>	Quiet Output Dynamic Peak V <sub>OL</sub>	C <sub>L</sub> = 30 pF, V <sub>IH</sub> = V <sub>CC</sub> , V <sub>IL</sub> = 0V	1.8	0.25	V
			2.5	0.6	
			3.3	0.8	
V <sub>OLV</sub>	Quiet Output Dynamic Valley V <sub>OL</sub>	C <sub>L</sub> = 30 pF, V <sub>IH</sub> = V <sub>CC</sub> , V <sub>IL</sub> = 0V	1.8	-0.25	V
			2.5	-0.6	
			3.3	-0.8	
V <sub>OHV</sub>	Quiet Output Dynamic Valley V <sub>OH</sub>	C <sub>L</sub> = 30 pF, V <sub>IH</sub> = V <sub>CC</sub> , V <sub>IL</sub> = 0V	1.8	1.5	V
			2.5	1.9	
			3.3	2.2	

### Capacitance

Symbol	Parameter	Conditions	T <sub>A</sub> = +25°C	Units
C <sub>IN</sub>	Input Capacitance	V <sub>CC</sub> = 1.8V, 2.5V, or 3.3V, V <sub>I</sub> = 0V or V <sub>CC</sub>	6.0	pF
C <sub>I/O</sub>	Output Capacitance	V <sub>I</sub> = 0V, or V <sub>CC</sub> , V <sub>CC</sub> = 1.8V, 2.5V or 3.3V	7.0	pF
C <sub>PD</sub>	Power Dissipation Capacitance	V <sub>I</sub> = 0V or V <sub>CC</sub> , f = 10 MHz, V <sub>CC</sub> = 1.8V, 2.5V or 3.3V	20.0	pF

### AC Loading and Waveforms ( $V_{CC} 3.3V \pm 0.3V$ to $1.8V \pm 0.15V$ )

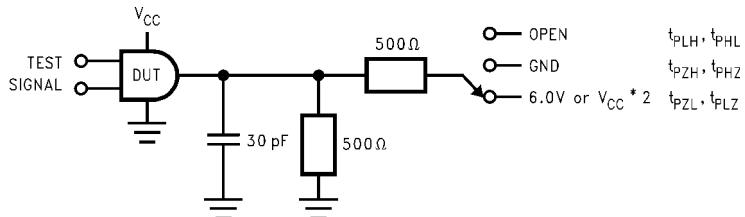

TEST	SWITCH
$t_{PLH}, t_{PHL}$	Open
$t_{PZL}, t_{PLZ}$	$6V$ at $V_{CC} = 3.3V \pm 0.3V$ ; $V_{CC} \times 2$ at $V_{CC} = 2.5V \pm 0.2V; 1.8V \pm 0.15V$
$t_{PZH}, t_{PHZ}$	GND

FIGURE 1. AC Test Circuit



FIGURE 2. Waveform for Inverting and Non-inverting Functions

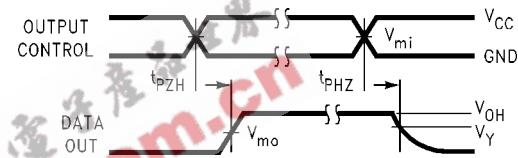


FIGURE 3. 3-STATE Output High Enable and Disable Times for Low Voltage Logic

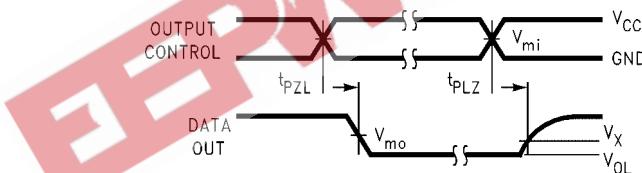


FIGURE 4. 3-STATE Output Low Enable and Disable Times for Low Voltage Logic



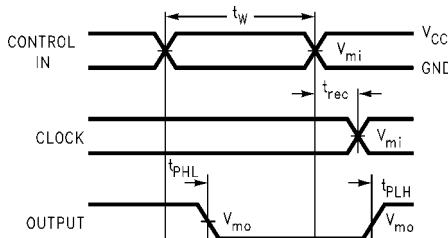
FIGURE 5. Propagation Delay, Pulse Width and  $t_{rec}$  Waveforms

FIGURE 6. Setup Time, Hold Time and Recovery Time for Low Voltage Logic

Symbol	$V_{CC}$		
	$3.3V \pm 0.3V$	$2.5V \pm 0.2V$	$1.8 \pm 0.15V$
$V_{mi}$	$1.5V$	$V_{CC}/2$	$V_{CC}/2$
$V_{mo}$	$1.5V$	$V_{CC}/2$	$V_{CC}/2$
$V_X$	$V_{OL} + 0.3V$	$V_{OL} + 0.15V$	$V_{OL} + 0.15V$
$V_Y$	$V_{OH} - 0.3V$	$V_{OH} - 0.15V$	$V_{OH} - 0.15V$

### AC Loading and Waveforms ( $V_{CC} 1.5V \pm 0.1V$ )

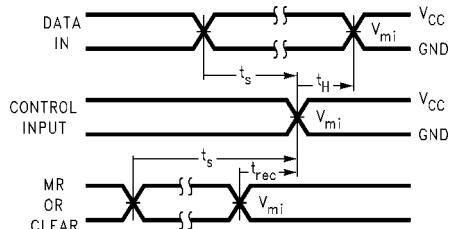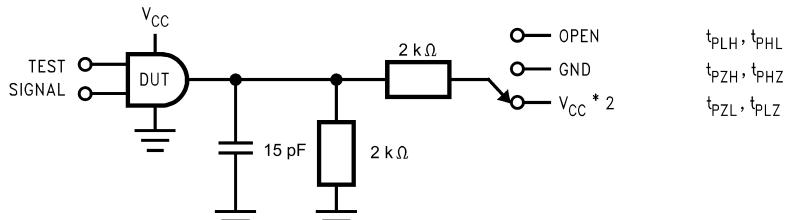

TEST	SWITCH
$t_{PLH}, t_{PHL}$	Open
$t_{PZH}, t_{PHZ}$	$V_{CC} \times 2$ at $V_{CC} = 1.5V \pm 0.1V$
$t_{PZL}, t_{PLZ}$	GND

FIGURE 7. AC Test Circuit

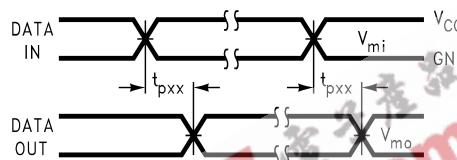


FIGURE 8. Waveform for Inverting and Non-inverting Functions

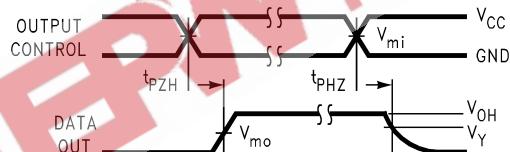


FIGURE 9. 3-STATE Output High Enable and Disable Times for Low Voltage Logic


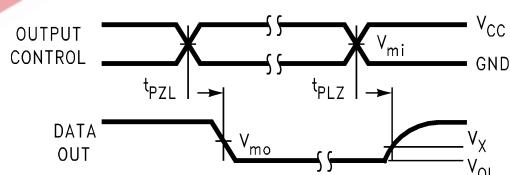


FIGURE 10. 3-STATE Output Low Enable and Disable Times for Low Voltage Logic

Symbol	$V_{CC}$
	$1.5V \pm 0.1V$
$V_{mi}$	$V_{CC}/2$
$V_{mo}$	$V_{CC}/2$
$V_X$	$V_{OL} + 0.1V$
$V_Y$	$V_{OH} - 0.1V$

## 74VCX16501 Low Voltage 18-Bit Universal Bus Transceivers with 3.6V Tolerant Inputs and Outputs

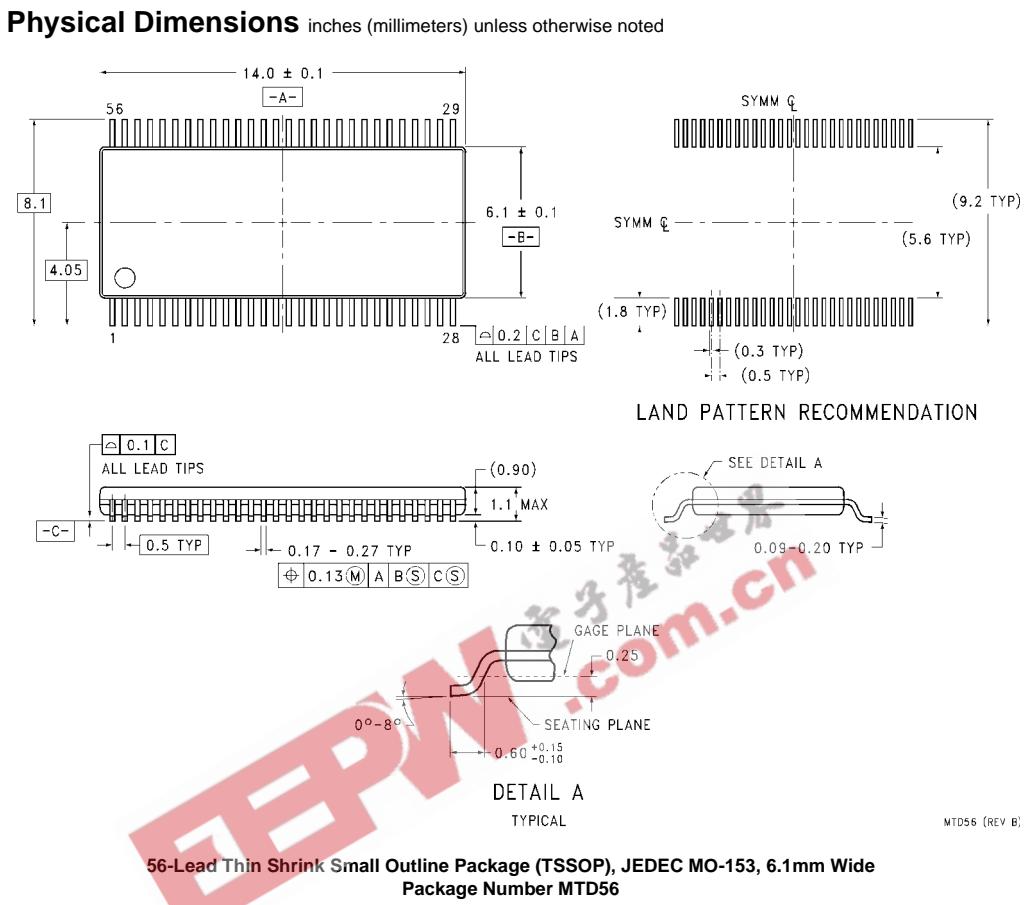

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)