


THIS DOCUMENT AND THE DATA DISCLOSED
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,
USED, OR DISCLOSED IN WHOLE OR IN PART
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

LTR.	DESCRIPTION	DATE	APP'D.
3	RELEASED PER ECO #2212	JW 10/11/90	BSP

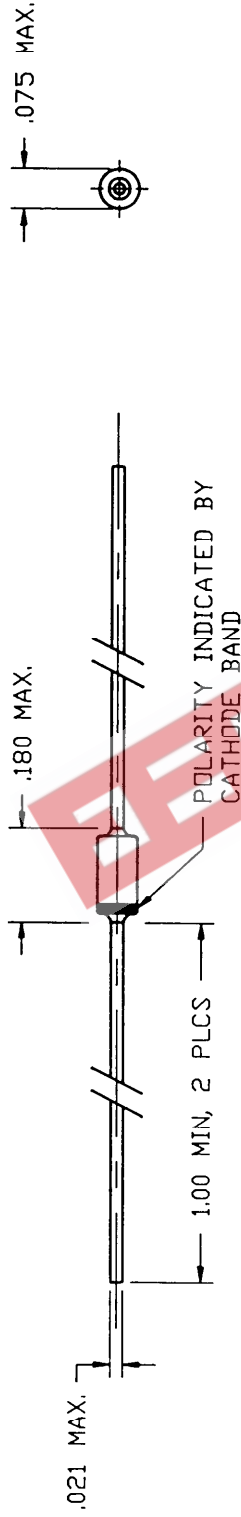

ELECTRICAL SPECIFICATIONS

PKG TYPE	V_{RRM} (V)	I_R (nA) @ V_R (V)	V_F (V) @ I_F (mA)	t_{rr} (ns)	TEST CONDITIONS
DO-35	100 MIN	25 20	1.0 MAX 10	4	$I_F=10mA, I_R=10mA, R_L=100\Omega, I_{rr}=1.0mA$

COPY

VICOR ANDOVER, MA. U.S.A.

DRAWN: 4/90	SWITCHING	DRAWING NO.	REV.
CHECKED:	DIODE, DO-35	02550	3
APP'D:	TOLERANCES (EXCEPT AS NOTED)	ANGLE ± 1°	SCALE 4:1
ALL DIMENSIONS ARE IN INCHES (MILLIMETERS)		DO NOT SCALE DRAWING	
NEXT ASSY:		SHEET 1 OF 1	