




MICRO FOOT® 3x2: 0.5-mm PITCH, 0.165-mm BUMP HEIGHT

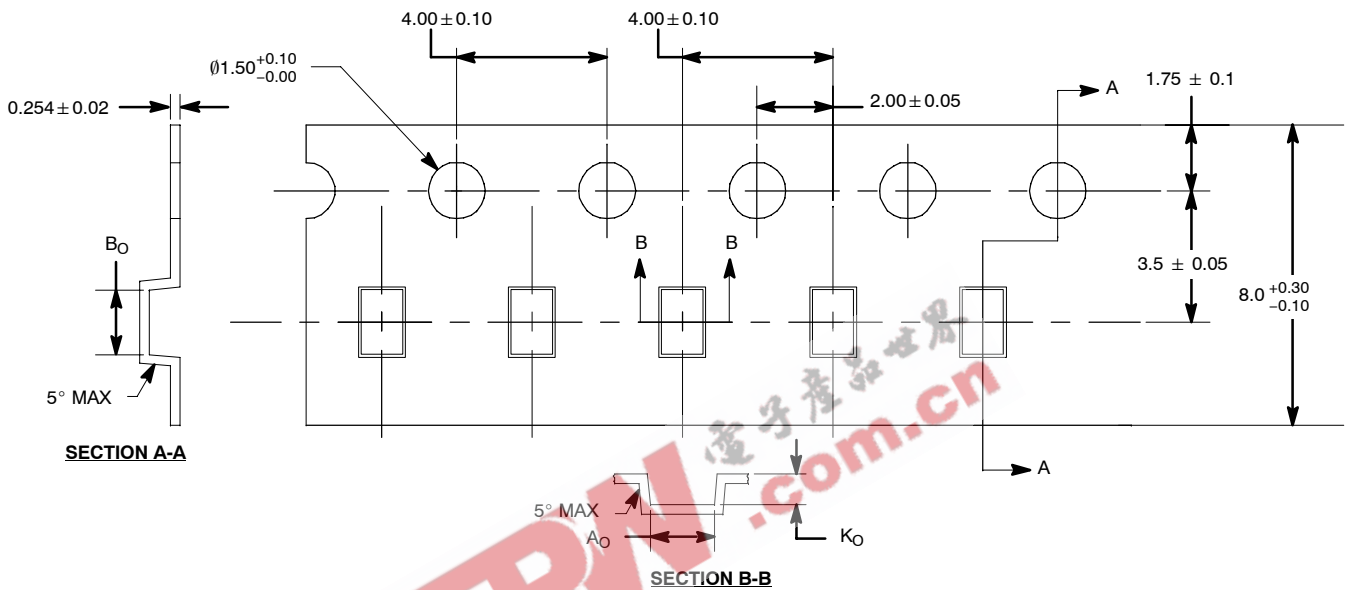

NOTES:

- 10-sprocket hole pitch cumulative tolerance ± 0.2 .
- Camber not to exceed 1 mm in 100 mm.
- Material: Black Conductive Polycarbonate.
- Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.
- All sizes in mm unless specified.
- Use 7" Lok reel with 8.4 mm width, (see row 3 of drawing of 93-5211-x).
- Use seal tape with 5.4 mm width, (see row 8 of drawing of 92-5210-x).

| PART # | VER | A ₀ | B ₀ | K ₀ | REEL DIA. | LENGTH |
|-----------|-----|----------------|----------------|----------------|-----------|--------------|
| DG3000-T1 | -1 | 1.23 ± 0.05 | 1.73 ± 0.05 | 0.83 ± 0.05 | 178 mm | 14 m approx. |
| DG3001-T1 | -2 | 1.19 ± 0.05 | 1.65 ± 0.05 | 0.86 ± 0.05 | | |
| DG3002-T1 | | | | | | |
| DG3003-T1 | | | | | | |

| QUANTITY PER REEL | |
|--|------|
| T1 | 3000 |
| ECN: S-32141—Rev. C, 10-Nov-03 DWG: 93-5221-x | |