

**CNX35U CNX36U CNX38U CNX39U**

## DESCRIPTION



The CNX35U, CNX36U, CNX38U and CNX39U are optically coupled isolators consisting of an infrared emitting GaAs diode and a silicon NPN phototransistor with accessible base. These devices are housed in 6-pin dual-in-line packages (DIP).

## FEATURES

- High output/input DC current transfer ratio
- Low saturation voltage
- UL recognized (File # E90700)
- VDE recognized (File # 94766)
- Ordering option '300' (e.g. CNX35U.300)

## APPLICATIONS

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs
- Appliance sensor systems
- Industrial controls



Parameters	Symbol	Device	Value	Units
<b>TOTAL DEVICE</b>				
Storage Temperature	$T_{STG}$	All	-55 to +150	°C
Operating Temperature	$T_{OPR}$	All	-40 to +100	°C
Lead Solder Temperature	$T_{SOL}$	All	260 for 10 sec	°C
<b>EMITTER</b>				
Continuous Reverse Voltage	$V_R$	All	5	V
Continuous Forward Current	$I_F$	All	100	mA
Forward Current - Peak (10 $\mu$ s pulse, $\delta = 0.01$ )	$I_F(pk)$	All	3.0	A
Total Power Dissipation up to 25°C Ambient	$P_D$	All	200	mW
Derate Linearly from 25°C		All	2.0	mW/°C
<b>DETECTOR</b>				
Collector to Emitter Voltage (open base)	$V_{CEO}$	CNX38U	80	V
		CNX35U, CNX36U, CNX39U	30	
Collector to Base Voltage (open emitter)	$V_{CBO}$	CNX38U	120	V
		CNX35U, CNX36U, CNX39U	70	
Emitter to Collector Voltage (open base)	$V_{ECO}$	All	7	V
DC Collector Current	$I_C$	All	100	mA
Detector Power Dissipation up to 25°C Ambient	$P_D$	All	200	mW
Derate Linearly from 25°C		All	2.0	mW/°C

CNX35U CNX36U CNX38U CNX39U

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  Unless otherwise specified.)

**INDIVIDUAL COMPONENT CHARACTERISTICS**

Parameters	Test Conditions	Symbol	Device	Min	Typ	Max	Units
<b>EMITTER</b>							
Input Forward Voltage	$I_F = 10 \text{ mA}$	$V_F$	All		1.15	1.5	V
Reverse Current	$V_R = 5 \text{ V}$	$I_R$	All			10	$\mu\text{A}$
<b>DETECTOR</b>							
	$V_{CE} = 10 \text{ V}$	$I_{CEO}$	CNX35U,CNX36U,CNX39U		2	50	nA
	$V_{CE} = 50 \text{ V}$		CNX38U		2	50	nA
Leakage Current Collector to Emitter	$V_{CE} = 10 \text{ V}, T_A = 70^\circ\text{C}$		CNX35U,CNX36U,CNX39U			10	$\mu\text{A}$
	$V_{CE} = 50 \text{ V}, T_A = 70^\circ\text{C}$		CNX38U			10	$\mu\text{A}$
	$V_{CE} = 10 \text{ V}$	$I_{CBO}$	All			20	nA
Breakdown Voltage							
Collector to Emitter	$I_C = 1 \text{ mA}, I_F = 0$	$BV_{CEO}$	CNX35U,CNX36U,CNX39U	30			V
			CNX38U	80			
Collector to Base	$I_C = 0.1 \text{ mA}, I_F = 0$	$BV_{CBO}$	CNX35U,CNX36U,CNX39U	70			V
			CNX38U	120			
Emitter to Collector	$I_E = 0.1 \text{ mA}, I_F = 0$	$BV_{ECO}$	All	7			V

**ISOLATION CHARACTERISTICS**

Characteristic	Test Conditions	Symbol	Min	Typ	Max	Units
Input-Output Isolation Voltage	$t = 1 \text{ min.}$	$V_{ISO}$	5,300			$V_{RMS}$
Isolation Resistance	$V_{I-O} = 500 \text{ VDC}$	$R_{ISO}$	1	10		$\text{T}\Omega$
Isolation Capacitance	$ IF =0, V=0\text{V}, f=1 \text{ MHz}$	$C_{ISO}$		0.6	1.3	pF

CNX35U CNX36U CNX38U CNX39U

TRANSFER CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ Unless otherwise specified.)							
DC Characteristics	Test Conditions	Symbol	Device	Min	Typ	Max	Units
Output/Input Current Transfer Ratio	$I_F = 10 \text{ mA}, V_{CE} = 0.4 \text{ V}$	CTR	CNX35U	40		160	%
	$I_F = 10 \text{ mA}, V_{CE} = 10 \text{ V}$		CNX39U	60		100	
	$I_F = 16 \text{ mA}, V_{CE} = 0.4 \text{ V}$		CNX36U	80		200	
	$I_F = 2 \text{ mA}, V_{CE} = 5 \text{ V}$		CNX38U	70		210	
	$I_F = 16 \text{ mA}, V_{CE} = 0.4 \text{ V}$			50			
	$I_F = 2 \text{ mA}, V_{CE} = 5 \text{ V}$		All	15			
Collector-Emitter Saturation Voltage	$I_F = 10 \text{ mA}, I_C = 2 \text{ mA}$	$V_{CE(\text{SAT})}$	CNX35U, CNX39U		0.15	0.4	V
	$I_F = 10 \text{ mA}, I_C = 4 \text{ mA}$		CNX36U		0.19	0.4	
	$I_F = 16 \text{ mA}, I_C = 2 \text{ mA}$		CNX38U		0.2	0.4	
AC Characteristics	Test Conditions	Symbol	Device	Min	Typ	Max	Units
Non-Saturated Switching Times Turn-On Time See Fig. 1 and Fig. 2	$R_L = 100 \Omega, I_C = 2 \text{ mA}, V_{CC} = 5 \text{ V}$	$t_{on}$	CNX35U			20	$\mu\text{s}$
			CNX39U			20	
			CNX36U			20	
			CNX38U			20	
Turn-Off Time See Fig. 1 and Fig. 2	$R_L = 100 \Omega, I_C = 2 \text{ mA}, V_{CC} = 5 \text{ V}$	$t_{off}$	CNX35U			20	$\mu\text{s}$
			CNX39U			20	
			CNX36U			20	
			CNX38U			20	
Saturated Switching Times Turn-On Time See Fig. 1 and Fig. 2	$R_L = 1 \text{ k}\Omega, I_C = 2 \text{ mA}, V_{CC} = 5 \text{ V}$	$t_{on}$	CNX35U			50	$\mu\text{s}$
			CNX39U			50	
			CNX36U			50	
			CNX38U			50	
Turn-Off Time See Fig. 1 and Fig. 2	$R_L = 1 \text{ k}\Omega, I_C = 2 \text{ mA}, V_{CC} = 5 \text{ V}$	$t_{off}$	CNX35U			50	$\mu\text{s}$
			CNX39U			50	
			CNX36U			50	
			CNX38U			50	

CNX35U CNX36U CNX38U CNX39U




Fig. 1 Switching Test Circuit

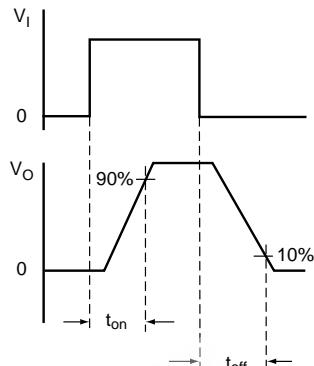


Fig. 2 Switching Test Waveforms

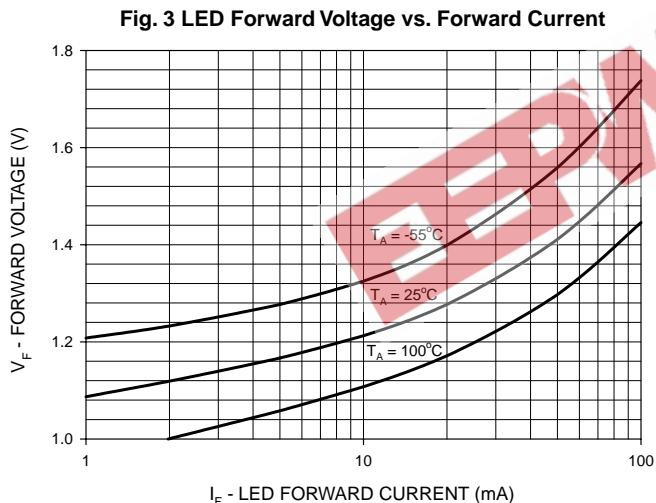


Fig. 3 LED Forward Voltage vs. Forward Current

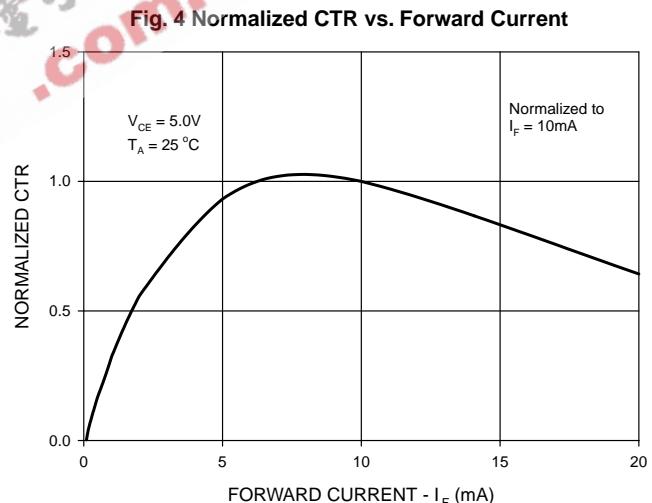


Fig. 4 Normalized CTR vs. Forward Current

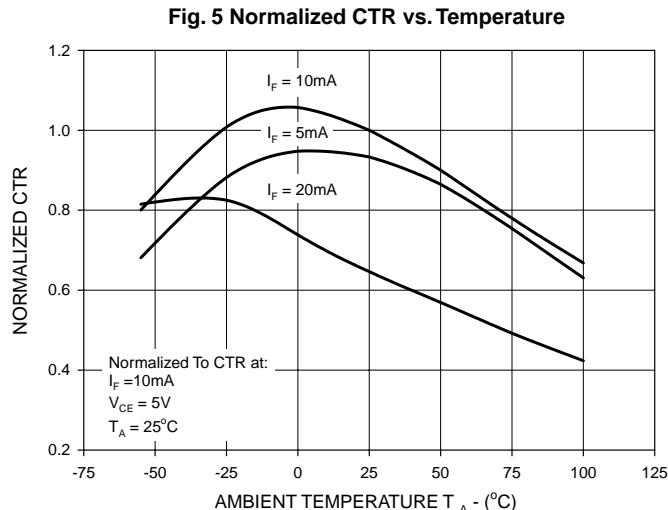


Fig. 5 Normalized CTR vs. Temperature

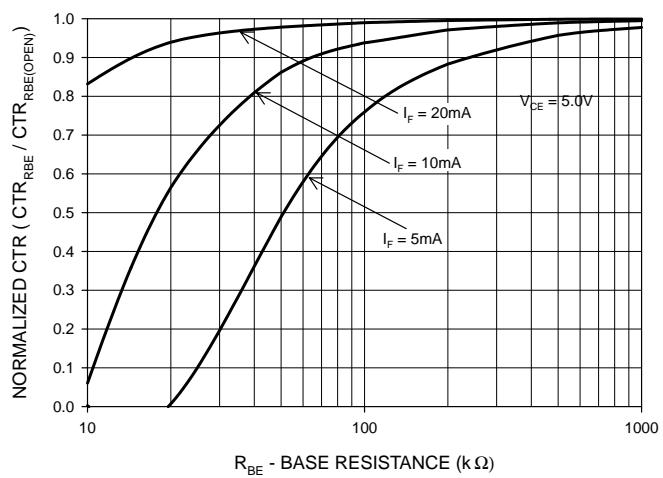


Fig. 6 CTR vs. RBE (Unsaturated)

CNX35U CNX36U CNX38U CNX39U

Fig. 7 CTR vs. R<sub>BE</sub> (Saturated)

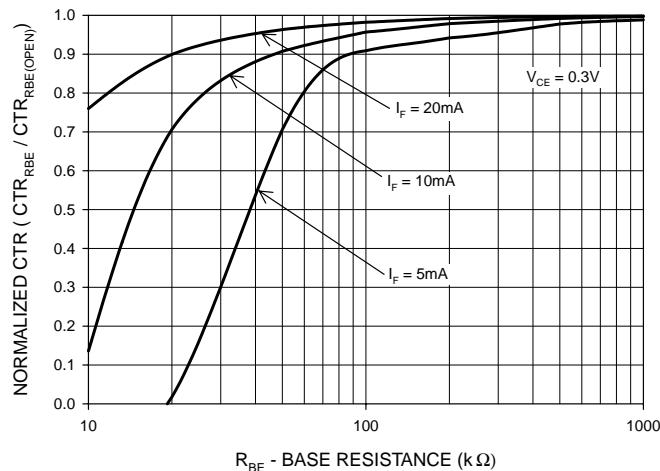


Fig. 8 Normalized t<sub>on</sub> vs. R<sub>BE</sub>

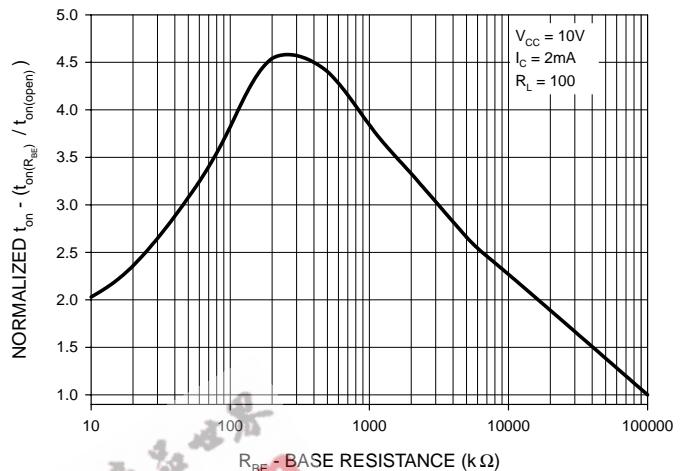


Fig. 9 Normalized t<sub>off</sub> vs. R<sub>BE</sub>

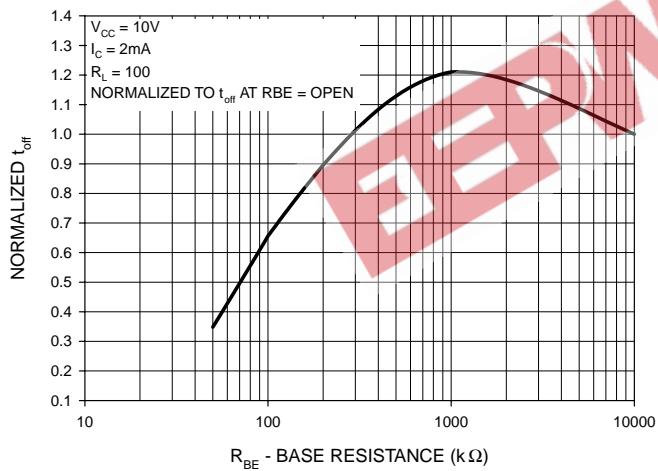


Fig. 10 Switching Speed vs. Load Resistor



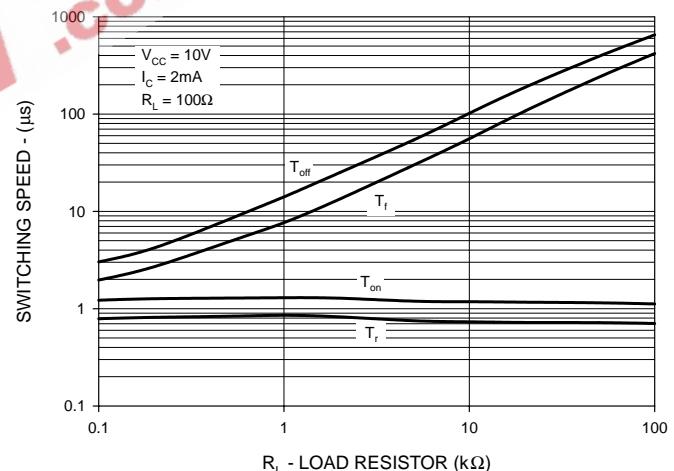


Fig. 11 Collector-Emitter Saturation Voltage  
as a Function of Collector Current

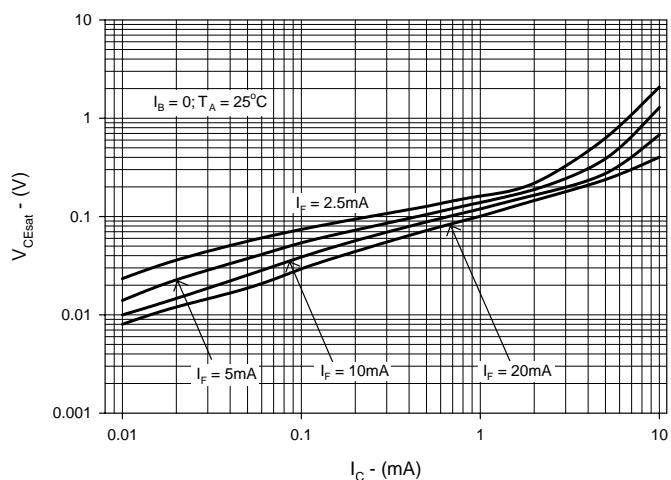


**CNX35U CNX36U CNX38U CNX39U**


**Package Dimensions (Through Hole)**

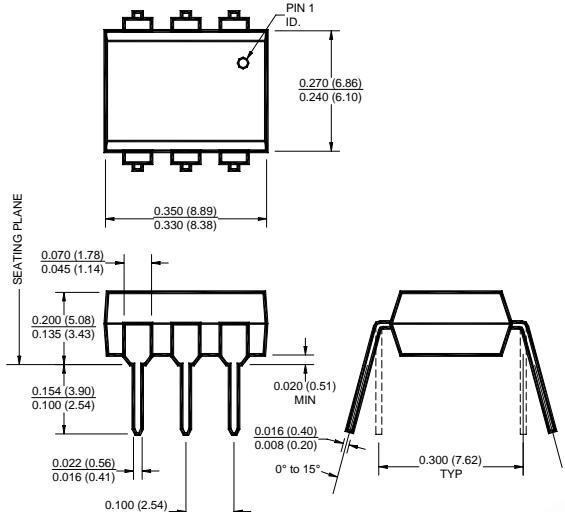


**Package Dimensions (Surface Mount)**

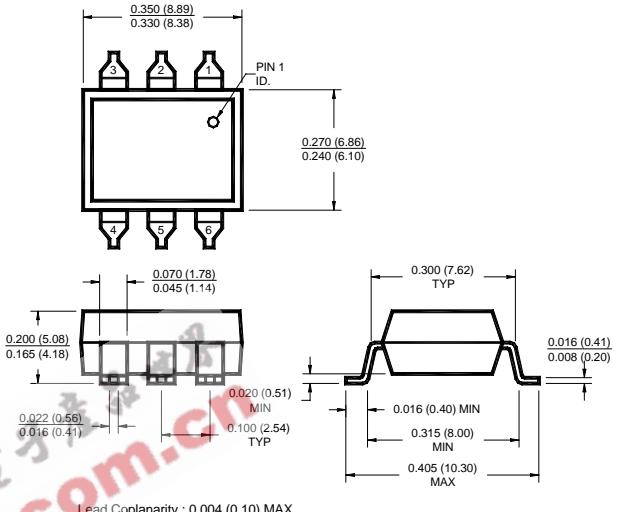

**Package Dimensions (0.4" Lead Spacing)**

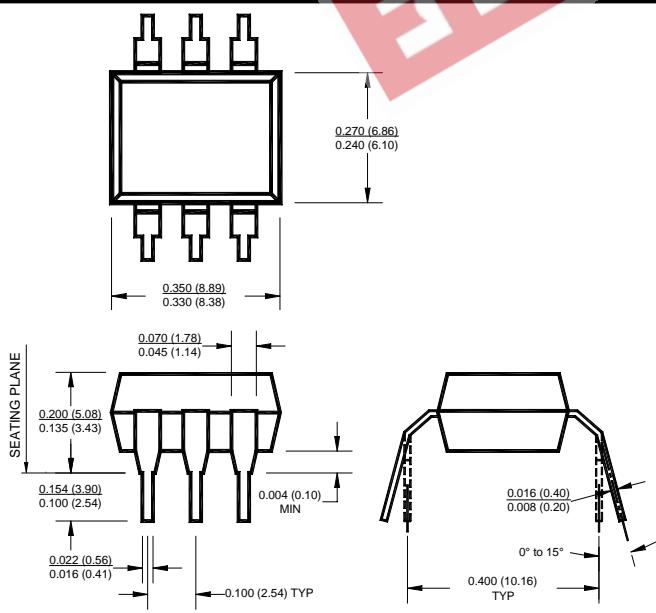

**Recommended Pad Layout for Surface Mount Leadform**

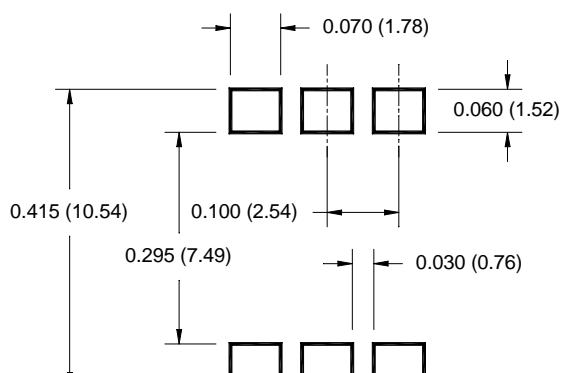

**NOTE**


All dimensions are in inches (millimeters)

CNX35U CNX36U CNX38U CNX39U

**ORDERING INFORMATION**

Option	Order Entry Identifier	Description
S	.S	Surface Mount Lead Bend
SD	.SD	Surface Mount; Tape and reel
W	.W	0.4" Lead Spacing
300	.300	VDE 0884
300W	.300W	VDE 0884, 0.4" Lead Spacing
3S	.3S	VDE 0884, Surface Mount
3SD	.3SD	VDE 0884, Surface Mount, Tape & Reel

**Carrier Tape Specifications ("D" Taping Orientation)**

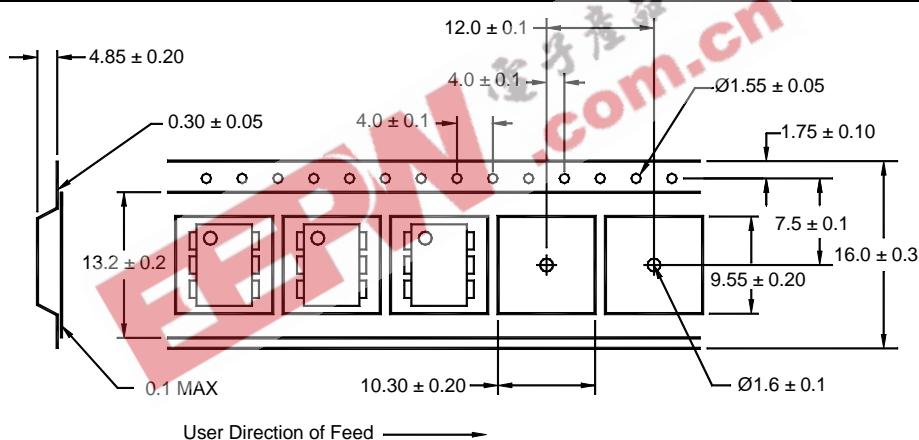

**NOTE**

All dimensions are in inches (millimeters)



## 6-PIN PHOTOTRANSISTOR OPTOCOUPLEDERS

CNX35U CNX36U CNX38U CNX39U

### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.