


Features

- Expands to add POTS lines, DSL or both
- Manufactured from high-impact resistant, ultraviolet-desensitized, flame retardant, UL Recognized plastic
- Optional sealed switching jacks with Insulation Displacement Connectors (IDCs)
- Subscriber lockable with Telco override
- Convenient ground attachment
-  Listed per UL 497 (File: E53117)

7090 Series – Network Interface Device

Bourns® 7090 NID provides a secure and weather resistant enclosure for Telco service for residential or commercial installations. The 7090 supplies station protection and test access points and can be configured for a maximum of six POTS lines or three lines with DSL. The 7090 features plenty of working space for wire management.

How To Order

7090 - 0X - X X - XX - XX

Model Number Designator _____

Number of Twisted Pairs _____

1 = One 3 = Three 5 = Five
2 = Two 4 = Four 6 = Six

Station Protector Options _____

D¹ = 455HS-MSP (2377-45-HS) Voice / DSL / Data (UL, cUL)
Z¹ = 455HS-BC* (2377-45-BC) Balance-Sensitive DSL (UL, cUL)
E² = 155HS-MSP (2378-35-HS) Voice / DSL / Data (UL, cUL)
Y² = 155HS-BC* (2378-35-BC) Balance-Sensitive DSL (UL, cUL)

B = 125EW (2374-01) Dual Gas Tube (UL, cUL, Telcordia)
C = 125EW-R (2375-01) Dual Gas Tube (UL, cUL, RUS)
L = 356M (2377-01) Balanced Gas Tube (UL, cUL, RUS)
M = J130S (2380-27-01) Solid State Protector (UL, cUL)
T = Tii355M
O = No Station Protectors (Not available with DSL Configurations)

*For DSL systems requiring capacitive balance within 1 pF.
Note 1 = Digi.Guard - 356 size, RUS Maximum Duty
Note 2 = Digi.Guard II - 125 size, RUS Heavy Duty

Special Options _____

G = Security Screw in Telco Cover
H = Security Screw in security plate
S = Sealed Switching Jack w/IDC (85122-T-IDC)
F = Sealed Switching Jack 4-Post (85122-T4)
B = Expansion Bridge w/Binding Posts (85122-B)
I = Expansion Bridge w/IDC (85122-IDC)
O = No options (standard 85122 jack)

DSL Options[†] _____

| | | |
|------------------------------------|---------------------------------------|------------------------------------|
| A1 = (1) 3610A ADSL POTS Splitter | P1 = (1) 3610A2 DSL 2+ POTS Splitter | V1 = (1) 3630A VDSL POTS Splitter |
| A2 = (2) 3610A ADSL POTS Splitters | P2 = (2) 3610A2 DSL 2+ POTS Splitters | V2 = (2) 3630A VDSL POTS Splitters |
| A3 = (3) 3610A ADSL POTS Splitters | P3 = (3) 3610A2 DSL 2+ POTS Splitters | V3 = (3) 3630A VDSL POTS Splitters |

† DSL Configuration Note:
The **3610A**, **3610A2** and **3630A** must be ordered with options **D**, **Z**, **E** or **Y** Station Protectors. 7090 NIDs ordered with DSL units will include **Special Option F** (4-post sealed switching jacks). Example: 7090-01-EF-A1

DSL Equalization Option _____

R1 = (1) 3660 Equalization Module



To add lines, use station protector +

- 85122 Standard Jack (Not available with DSL configurations)
85122-T4 Sealed Switching Jack, 4-post
85122-T-IDC Sealed Switching Jack w/IDC

7090 Series – Network Interface Device

BOURNS®

POTS Splitter Installation

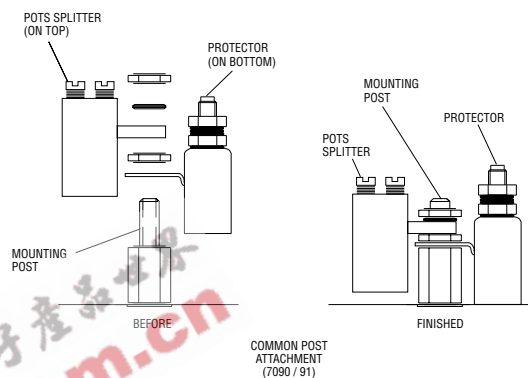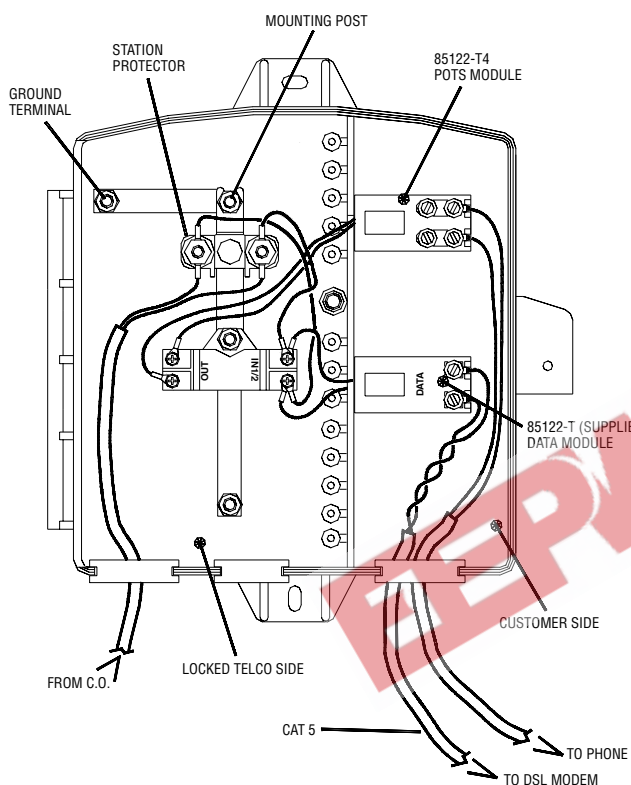


Product Dimensions

| High | Wide | Deep |
|-------|-------|-------|
| 229 | 216 | 69 |
| (9.0) | (8.5) | (2.7) |


DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

RJ11 Subscriber Bridges


**85122
Standard Loop**



**85122-T4*
Internal Switch - 4 Lugs**




**85122-T-IDC*
Sealed Switch Jack w/IDC**




Expansion Bridges

**85122-IDC
Insulation Displacement
Connectors**



**85122-B
Binding Post**



*Includes environmental sealant and closed-cell foam gasket.

REV. K 06/06

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.