

# Low-Voltage CMOS Octal D-Type Flip-Flop With 5V-Tolerant Inputs and Outputs (3-State, Non-Inverting)

The MC74LCX374 is a high performance, non–inverting octal D–type flip–flop operating from a 2.7 to 3.6V supply. High impedance TTL compatible inputs significantly reduce current loading to input drivers while TTL compatible outputs offer improved switching noise performance. A V<sub>I</sub> specification of 5.5V allows MC74LCX374 inputs to be safely driven from 5V devices.

The MC74LCX374 consists of 8 edge-triggered flip-flops with individual D-type inputs an<u>d 3</u>-state true outputs. The buffered clock and buffered Output Enable (OE) are common to all flip-flops. The eight flip-flops will store the state of individual D inputs that meet the setup and hold<u>time</u> requirements on the LOW-to-HIGH Clock (CP) transition. With the OE LOW, the <u>contents</u> of the eight flip-flops are available at the outputs. When the OE is HIGH, the outputs go to the high impedance state. The OE input level does not affect the operation of the flip-flops.

- Designed for 2.7 to 3.6V V<sub>CC</sub> Operation
- 5V Tolerant Interface Capability With 5V TTL Logic
- Supports Live Insertion and Withdrawal
- IOFF Specification Guarantees High Impedance When V<sub>CC</sub> = 0V
- LVTTL Compatible
- LVCMOS Compatible
- 24mA Balanced Output Sink and Source Capability
- Near Zero Static Supply Current in All Three Logic States (10μA) Substantially Reduces System Power Requirements
- Latchup Performance Exceeds 500mA
- ESD Performance: Human Body Model >2000V; Machine Model >200V

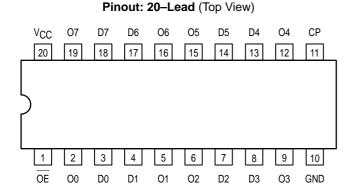

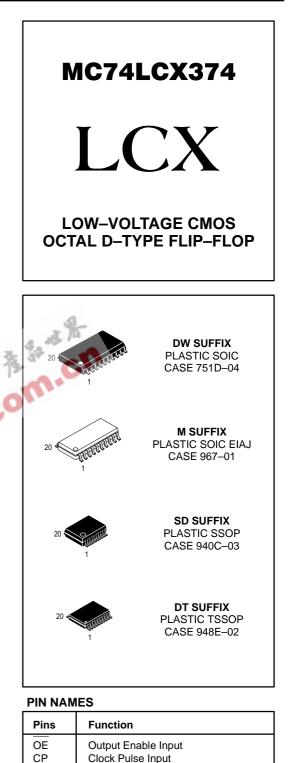


11/96

D0-D7

00-07

Data Inputs 3–State Outputs

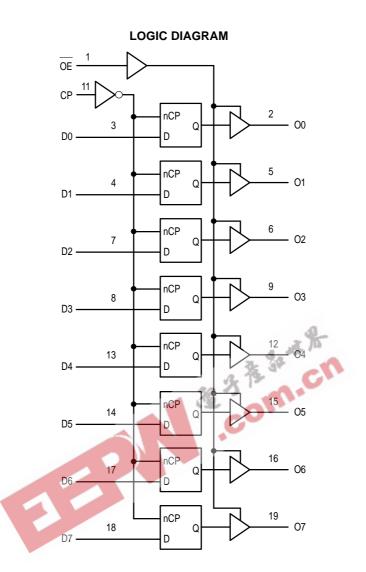

INPUTS OE CP Dn		OUTPUTS On	OPERATING MODE	
L	$\uparrow \\ \uparrow$	l h	L	Load and Read Register
L	1	Х	NC	Hold and Read Register
Н	\$	Х	Z	Hold and Disable Outputs
H H	$\uparrow \uparrow$	l h	Z Z	Load Internal Register and Disable Outputs

H = High Voltage Level; h = High Voltage Level One Setup Time Prior to the Low-to-High Clock Transition; L = Low Voltage Level; I = Low Voltage Level One Setup Time Prior to the Low-to-High Clock Transition; NC = No Change, State Prior to Low-to-High Clock Transition; X = High or Low Voltage Level and Transitions are Acceptable; Z = High Impedance State;  $\uparrow$  = Low-to-High Transition;  $\uparrow$  = Not a Low-to-High Transition; For I<sub>CC</sub> Reasons DO NOT FLOAT Inputs

#### Parameter Symbol Value Condition Unit -0.5 to +7.0 V VCC DC Supply Voltage $-0.5 \le V_{I} \le +7.0$ V ٧ı DC Input Voltage ٧o DC Output Voltage $-0.5 \le V_{O} \le +7.0$ Output in 3-State V $-0.5 \le V_{O} \le V_{CC} + 0.5$ Note 1. V DC Input Diode Current -50 $V_I < GND$ mΑ IIK IOK DC Output Diode Current -50 VO < GND mΑ +50 $V_{O} > V_{CC}$ mΑ DC Output Source/Sink Current ±50 IО mΑ DC Supply Current Per Supply Pin ±100 ICC mΑ DC Ground Current Per Ground Pin ±100 mΑ IGND -65 to +150 Storage Temperature Range °C TSTG

#### **ABSOLUTE MAXIMUM RATINGS\***

Absolute maximum continuous ratings are those values beyond which damage to the device may occur. Exposure to these conditions or conditions beyond those indicated may adversely affect device reliability. Functional operation under absolute-maximum-rated conditions is not implied. The state of the

1. Output in HIGH or LOW State. IO absolute maximum rating must be observed.

#### **RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter	36 3	Min	Тур	Max	Unit
V <sub>CC</sub>	Supply Voltage	Operating Data Retention Only	2.0 1.5	3.3 3.3	3.6 3.6	V
VI	Input Voltage		0		5.5	V
VO	Output Voltage (H	IGH or LOW State) (3–State)	0 0		V <sub>CC</sub> 5.5	V
IOH	HIGH Level Output Current, $V_{CC} = 3.0V - 3.0V$	3.6V			-24	mA
I <sub>OL</sub>	LOW Level Output Current, V <sub>CC</sub> = 3.0V – 3.6V				24	mA
ЮН	HIGH Level Output Current, V <sub>CC</sub> = 2.7V – 3.0V				-12	mA
I <sub>OL</sub>	LOW Level Output Current, V <sub>CC</sub> = 2.7V – 3.0V				12	mA
T <sub>A</sub>	Operating Free–Air Temperature		-40		+85	°C
$\Delta t/\Delta V$	Input Transition Rise or Fall Rate, $V_{IN}$ from $V_{CC} = 3.0V$	0.8V to 2.0V,	0		10	ns/V

#### DC ELECTRICAL CHARACTERISTICS

			T <sub>A</sub> = −40°C to +85°C		
Symbol	Characteristic	Condition	Min	Max	Unit
VIH	HIGH Level Input Voltage (Note 2.)	$2.7V \le V_{CC} \le 3.6V$	2.0		V
VIL	LOW Level Input Voltage (Note 2.)	$2.7V \le V_{CC} \le 3.6V$		0.8	V
VOH	HIGH Level Output Voltage	$2.7V \le V_{CC} \le 3.6V; \ I_{OH} = -100 \mu A$	V <sub>CC</sub> – 0.2		V
		$V_{CC} = 2.7V; I_{OH} = -12mA$	2.2		
		$V_{CC} = 3.0V; I_{OH} = -18mA$	2.4		
		$V_{CC} = 3.0V; I_{OH} = -24mA$	2.2		
VOL	LOW Level Output Voltage	$2.7V \leq V_{CC} \leq 3.6V; \ I_{OL} = 100 \mu A$		0.2	V
		$V_{CC} = 2.7V; I_{OL} = 12mA$		0.4	
		$V_{CC} = 3.0V; I_{OL} = 16mA$		0.4	
		$V_{CC} = 3.0V; I_{OL} = 24mA$		0.55	

2. These values of V<sub>I</sub> are used to test DC electrical characteristics only.

### DC ELECTRICAL CHARACTERISTICS (continued)

			T <sub>A</sub> = −40°C to +85°C		
Symbol	Characteristic	Condition	Min Max		Unit
Ц	Input Leakage Current	$2.7 \text{V} \le \text{V}_{CC} \le 3.6 \text{V}; \ 0 \text{V} \le \text{V}_{I} \le 5.5 \text{V}$		±5.0	μΑ
loz	3-State Output Current	$2.7 \leq V_{CC} \leq 3.6 \text{V}; \ 0 \text{V} \leq \text{V}_{O} \leq 5.5 \text{V}; \\ \text{V}_{I} = \text{V}_{IH} \text{ or } \text{V} \text{ IL}$		±5.0	μA
IOFF	Power-Off Leakage Current	$V_{CC} = 0V; V_{I} \text{ or } V_{O} = 5.5V$		10	μΑ
ICC	Quiescent Supply Current	$2.7 \le V_{CC} \le 3.6V; V_I = GND \text{ or } V_{CC}$		10	μΑ
		$2.7 \le V_{CC} \le 3.6V; \ 3.6 \le V_I \text{ or } V_O \le 5.5V$		±10	μΑ
ΔlCC	Increase in I <sub>CC</sub> per Input	$2.7 \leq V_{CC} \leq 3.6 \text{V}; \text{ V}_{IH} = V_{CC} - 0.6 \text{V}$		500	μΑ

### AC CHARACTERISTICS ( $t_R = t_F = 2.5ns$ ; $C_L = 50pF$ ; $R_L = 500\Omega$ )

				$T_A = -40^{\circ}C$	to +85°C		
			V <sub>CC</sub> = 3.0	0V to 3.6V	V <sub>CC</sub> :	= 2.7V	
Symbol	Parameter	Waveform	Min	Max 🔥	Min	Max	Unit
fmax	Clock Pulse Frequency	1	150	C'			MHz
<sup>t</sup> PLH <sup>t</sup> PHL	Propagation Delay CP to O <sub>N</sub>	1 3	1.5 1.5	8.5 8.5	1.5 1.5	9.5 9.5	ns
<sup>t</sup> PZH <sup>t</sup> PZL	Output Enable Time to HIGH and LOW Levels	2	1.5 1.5	8.5 8.5	1.5 1.5	9.5 9.5	ns
<sup>t</sup> PHZ <sup>t</sup> PLZ	Output Disable Time from HIGH and LOW Levels	2	1.5 1.5	7.5 7.5	1.5 1.5	8.5 8.5	ns
t <sub>S</sub>	Setup Time, HIGH or LOW Dn to CP	1	2.5		2.5		ns
t <sub>h</sub>	Hold Time, HIGH or LOW Dn to CP	1	1.5		1.5		ns
tw	CP Pulse Width, HIGH or LOW	3	3.3		3.3		ns
<sup>t</sup> OSHL <sup>t</sup> OSLH	Output-to-Output Skew (Note 3.)			1.0 1.0			ns

 Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (tOSHL) or LOW-to-HIGH (tOSLH); parameter guaranteed by design.


### DYNAMIC SWITCHING CHARACTERISTICS

			T <sub>A</sub> = +25°C			
Symbol	Characteristic	Condition	Min	Тур	Max	Unit
V <sub>OLP</sub>	Dynamic LOW Peak Voltage (Note 4.)	$V_{\mbox{\scriptsize CC}}$ = 3.3V, $C_{\mbox{\scriptsize L}}$ = 50pF, $V_{\mbox{\scriptsize IH}}$ = 3.3V, $V_{\mbox{\scriptsize IL}}$ = 0V		0.8		V
VOLV	Dynamic LOW Valley Voltage (Note 4.)	$V_{\mbox{\scriptsize CC}}$ = 3.3V, $\mbox{\scriptsize C}_{\mbox{\scriptsize L}}$ = 50pF, $\mbox{\scriptsize V}_{\mbox{\scriptsize IH}}$ = 3.3V, $\mbox{\scriptsize V}_{\mbox{\scriptsize IL}}$ = 0V		0.8		V

4. Number of outputs defined as "n". Measured with "n-1" outputs switching from HIGH-to-LOW or LOW-to-HIGH. The remaining output is measured in the LOW state.

## CAPACITIVE CHARACTERISTICS


Symbol	Parameter	Condition	Typical	Unit
C <sub>IN</sub>	Input Capacitance	$V_{CC} = 3.3V$ , $V_I = 0V$ or $V_{CC}$	7	pF
COUT	Output Capacitance	$V_{CC} = 3.3V$ , $V_I = 0V$ or $V_{CC}$	8	pF
C <sub>PD</sub>	Power Dissipation Capacitance	10MHz, $V_{CC}$ = 3.3V, $V_I$ = 0V or $V_{CC}$	25	pF

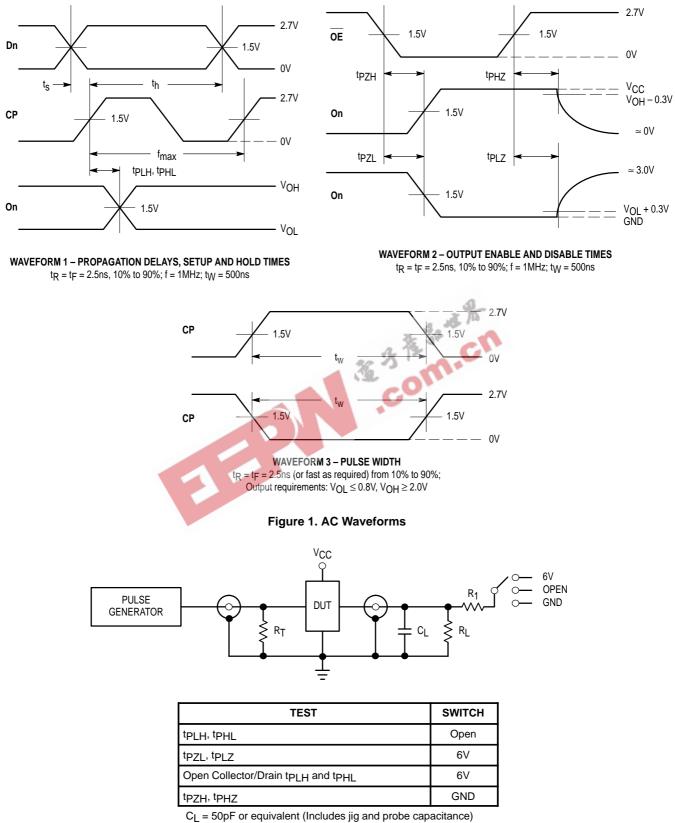

 $R_{L}^{-} = R_{1} = 500\Omega$  or equivalent


 $R_T = Z_{OUT}$  of pulse generator (typically 50 $\Omega$ )

Figure 2. Test Circuit

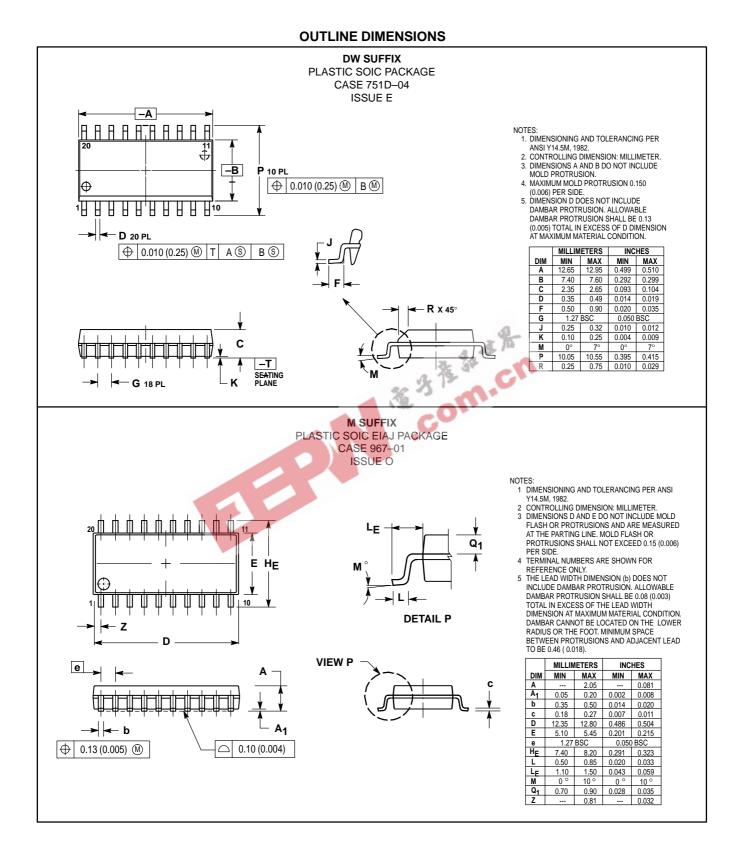

#### MOTOROLA

#### OUTLINE DIMENSIONS

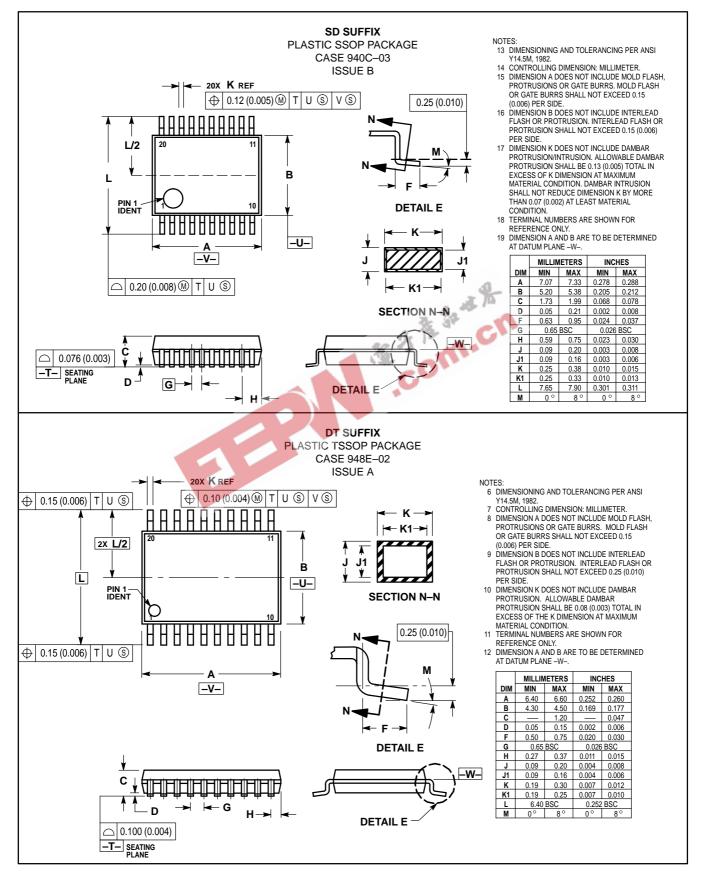



Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and **(Motorola**, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

#### How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 5405; Denver, Colorado 80217. 1–800–441–2447

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE 602-244-6609 INTERNET: http://Design-NET.com

0

JAPAN: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, 6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 81–3–3521–8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298

