

# **DATA SHEET**

For a complete data sheet, please also download:

- The IC06 74HC/HCT/HCU/HCMOS Logic Family Specifications
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Information
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Outlines

EEBN 爱好者社区  
.com.cn

## **74HC/HCT4316** **Quad bilateral switches**

Product specification  
File under Integrated Circuits, IC06

September 1993

**Quad bilateral switches****74HC/HCT4316****FEATURES**

- Low "ON" resistance:
  - 160 Ω (typ.) at  $V_{CC} - V_{EE} = 4.5$  V
  - 120 Ω (typ.) at  $V_{CC} - V_{EE} = 6.0$  V
  - 80 Ω (typ.) at  $V_{CC} - V_{EE} = 9.0$  V
- Logic level translation:  
to enable 5 V logic to communicate with  $\pm 5$  V analog signals
- Typical "break before make" built in
- Output capability: non-standard
- $I_{CC}$  category: MSI

**GENERAL DESCRIPTION**

The 74HC/HCT4316 are high-speed Si-gate CMOS devices. They are specified in compliance with JEDEC standard no. 7A.

**QUICK REFERENCE DATA**

$V_{EE} = GND = 0$  V;  $T_{amb} = 25$  °C;  $t_r = t_f = 6$  ns

SYMBOL	PARAMETER	CONDITIONS	TYPICAL		UNIT
			HC	HCT	
$t_{PZH}$	turn "ON" time $\bar{E}$ to $V_{OS}$ $nS$ to $V_{OS}$	$C_L = 15$ pF; $R_L = 1$ kΩ; $V_{CC} = 5$ V	19	19	ns
			16	17	ns
$t_{PZL}$	turn "ON" time $\bar{E}$ to $V_{OS}$ $nS$ to $V_{OS}$		19	24	ns
			16	21	ns
$t_{PHZ}/t_{PLZ}$	turn "OFF" time $\bar{E}$ to $V_{OS}$ $nS$ to $V_{OS}$		20	21	ns
			16	19	ns
$C_I$	input capacitance		3.5	3.5	pF
$C_{PD}$	power dissipation capacitance per switch	notes 1 and 2	13	14	pF
$C_S$	max. switch capacitance		5	5	pF

**Notes**

1.  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu W$ ):  

$$P_D = C_{PD} \times V_{CC}^2 \times f_i + \sum \{ (C_L + C_S) \times V_{CC}^2 \times f_o \}$$
 where:  
 $f_i$  = input frequency in MHz  
 $f_o$  = output frequency in MHz  
 $\sum \{ (C_L + C_S) \times V_{CC}^2 \times f_o \}$  = sum of outputs

The 74HC/HCT4316 have four independent analog switches. Each switch has two input/output terminals ( $nY$ ,  $nZ$ ) and an active HIGH select input ( $nS$ ). When the enable input ( $\bar{E}$ ) is HIGH, all four analog switches are turned off.

Current through a switch will not cause additional  $V_{CC}$  current provided the voltage at the terminals of the switch is maintained within the supply voltage range;  
 $V_{CC} \gg (V_Y, V_Z) \gg V_{EE}$ . Inputs  $nY$  and  $nZ$  are electrically equivalent terminals.

$V_{CC}$  and GND are the supply voltage pins for the digital control inputs ( $\bar{E}$  and  $nS$ ). The  $V_{CC}$  to GND ranges are 2.0 to 10.0 V for HC and 4.5 to 5.5 V for HCT.  
The analog inputs/outputs ( $nY$  and  $nZ$ ) can swing between  $V_{CC}$  as a positive limit and  $V_{EE}$  as a negative limit.  
 $V_{CC} - V_{EE}$  may not exceed 10.0 V.

See the "4016" for the version without logic level translation.

$C_L$  = output load capacitance in pF

$C_S$  = max. switch capacitance in pF

$V_{CC}$  = supply voltage in V

2. For HC the condition is  $V_I = GND$  to  $V_{CC}$

For HCT the condition is  $V_I = GND$  to  $V_{CC} - 1.5$  V

## Quad bilateral switches

74HC/HCT4316

## ORDERING INFORMATION

See "74HC/HCT/HCU/HCMOS Logic Package Information".

## PIN DESCRIPTION

PIN NO.	SYMBOL	NAME AND FUNCTION
1, 4, 10, 13	1Z to 4Z	independent inputs/outputs
2, 3, 11, 12	1Y to 4Y	independent inputs/outputs
7	$\bar{E}$	enable input (active LOW)
8	GND	ground (0 V)
9	$V_{EE}$	negative supply voltage
15, 5, 6, 14	1S to 4S	select inputs (active HIGH)
16	$V_{CC}$	positive supply voltage




Fig.1 Pin configuration.




Fig.2 Logic symbol.

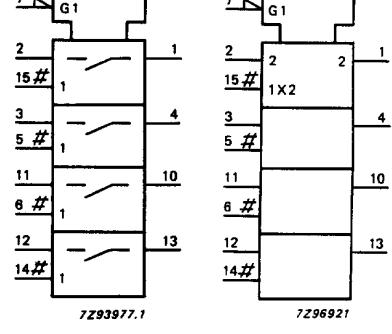


Fig.3 IEC logic symbol.

## Quad bilateral switches

74HC/HCT4316

## FUNCTION TABLE



INPUTS		SWITCH
$\bar{E}$	nS	
L	L	off
L	H	on
H	X	off

## Note

1. H = HIGH voltage level
- L = LOW voltage level
- X = don't care

## APPLICATIONS

- Signal gating
- Modulation
- Demodulation
- Chopper

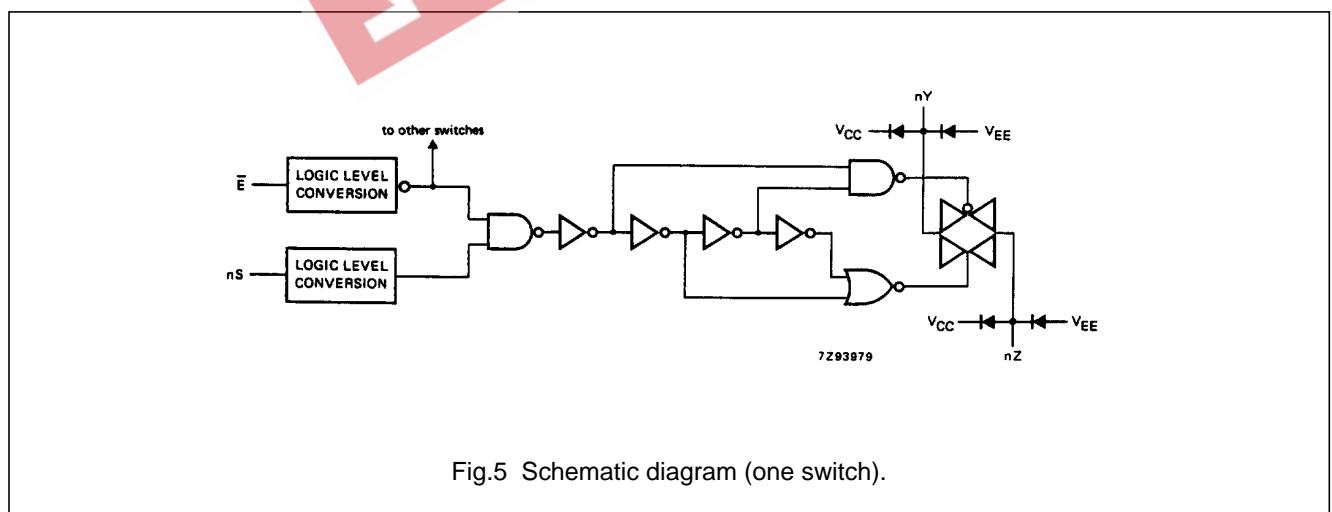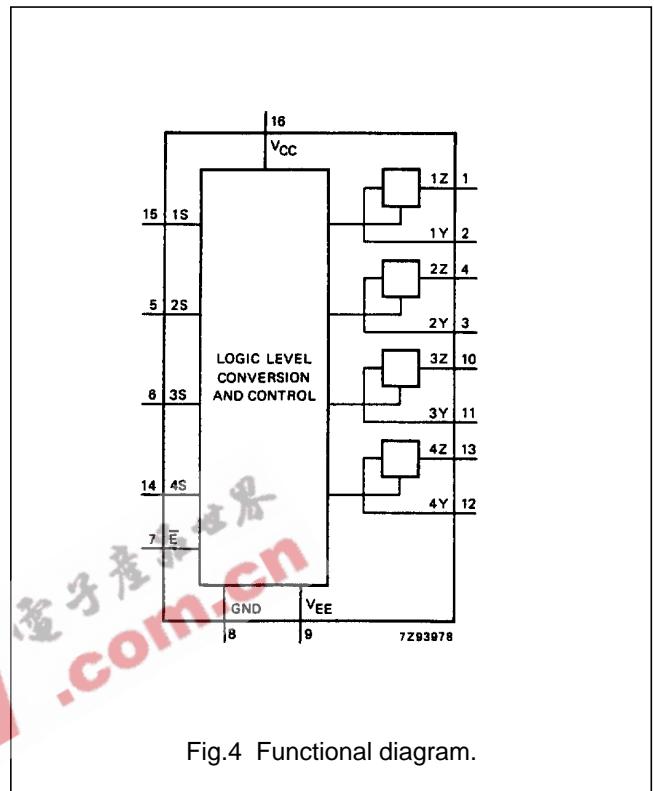

## Quad bilateral switches

## 74HC/HCT4316

**RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Voltages are referenced to  $V_{EE}$  = GND (ground = 0 V)

SYMBOL	PARAMETER	MIN.	MAX.	UNIT	CONDITIONS
$V_{CC}$	DC supply voltage	-0.5	+11.0	V	
$\pm I_{IK}$	DC digital input diode current		20	mA	for $V_I < -0.5$ V or $V_I > V_{CC} + 0.5$ V
$\pm I_{SK}$	DC switch diode current		20	mA	for $V_S < -0.5$ V or $V_S > V_{CC} + 0.5$ V
$\pm I_S$	DC switch current		25	mA	for $-0.5$ V < $V_S < V_{CC} + 0.5$ V
$\pm I_{EE}$	DC $V_{EE}$ current		20	mA	
$\pm I_{CC}$ ; $\pm I_{GND}$	DC $V_{CC}$ or GND current		50	mA	
$T_{stg}$	storage temperature range	-65	+150	°C	
$P_{tot}$	power dissipation per package				for temperature range: -40 to +125 °C 74HC/HCT
	plastic DIL		750	mW	above +70 °C: derate linearly with 12 mW/K
$P_S$	plastic mini-pack (SO)		500	mW	above +70 °C: derate linearly with 8 mW/K
	power dissipation per switch		100	mW	

**Note to ratings**

To avoid drawing  $V_{CC}$  current out of terminal Z, when switch current flows in terminals  $Y_n$ , the voltage drop across the bidirectional switch must not exceed 0.4 V. If the switch current flows into terminals Z, no  $V_{CC}$  current will flow out of terminal  $Y_n$ . In this case there is no limit for the voltage drop across the switch, but the voltages at  $Y_n$  and Z may not exceed  $V_{CC}$  or  $V_{EE}$ .

**RECOMMENDED OPERATING CONDITIONS**

SYMBOL	PARAMETER	74HC			74HCT			UNIT	CONDITIONS
		min.	typ.	max.	min.	typ.	max.		
$V_{CC}$	DC supply voltage $V_{CC}$ -GND	2.0	5.0	10.0	4.5	5.0	5.5	V	see Figs 6 and 7
$V_{CC}$	DC supply voltage $V_{CC}$ - $V_{EE}$	2.0	5.0	10.0	2.0	5.0	10.0	V	see Figs 6 and 7
$V_I$	DC input voltage range	GND		$V_{CC}$	GND		$V_{CC}$	V	
$V_S$	DC switch voltage range	$V_{EE}$		$V_{CC}$	$V_{EE}$		$V_{CC}$	V	
$T_{amb}$	operating ambient temperature range	-40		+85	-40		+85	°C	see DC and AC CHARACTERISTICS
$T_{amb}$	operating ambient temperature range	-40		+125	-40		+125	°C	
$t_r, t_f$	input rise and fall times		6.0	1000 500 400 250		6.0	500	ns	$V_{CC} = 2.0$ V $V_{CC} = 4.5$ V $V_{CC} = 6.0$ V $V_{CC} = 10.0$ V

## Quad bilateral switches

## 74HC/HCT4316

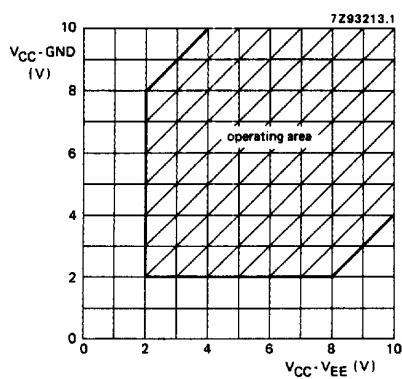


Fig.6 Guaranteed operating area as a function of the supply voltages for 74HC4316.

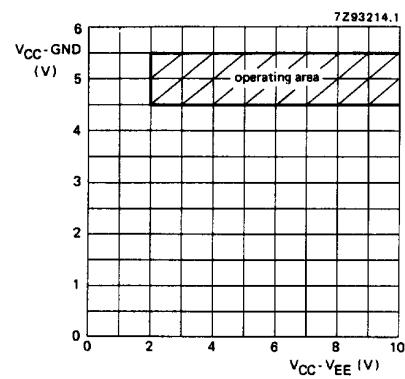


Fig.7 Guaranteed operating area as a function of the supply voltages for 74HCT4316.

## DC CHARACTERISTICS FOR 74HC/HCT

For 74HC:  $V_{CC}$  - GND or  $V_{CC}$  -  $V_{EE}$  = 2.0, 4.5, 6.0 and 9.0 VFor 74HCT:  $V_{CC}$  - GND = 4.5 and 5.5 V;  $V_{CC}$  -  $V_{EE}$  = 2.0, 4.5, 6.0 and 9.0 V

SYMBOL	PARAMETER	$T_{amb}$ ( $^{\circ}$ C)						UNIT	TEST CONDITIONS									
		74HC/HCT							V <sub>CC</sub> (V)	$V_{EE}$ (V)	$I_S$ ( $\mu$ A)	$V_{is}$	$V_I$					
		+25			-40 to +85		-40 to +125											
		min.	typ.	max.	min.	max.	min.	max.										
R <sub>ON</sub>	ON resistance (peak)	—	—	—	—	—	—	—	$\Omega$	2.0	0	100	$V_{CC}$ to $V_{EE}$					
		160	320	400	480	400	480	400	$\Omega$	4.5	0	1000	$V_{IH}$ or $V_{IL}$					
		120	240	300	360	240	360	240	$\Omega$	6.0	0	1000	$V_{EE}$					
		85	170	215	255	170	255	170	$\Omega$	4.5	-4.5	1000	$V_{IL}$					
R <sub>ON</sub>	ON resistance (rail)	160	—	—	—	—	—	—	$\Omega$	2.0	0	100	$V_{EE}$					
		80	160	200	240	160	240	160	$\Omega$	4.5	0	1000	$V_{IH}$ or $V_{IL}$					
		70	140	175	210	140	210	140	$\Omega$	6.0	0	1000	$V_{IL}$					
		60	120	150	180	120	180	120	$\Omega$	4.5	-4.5	1000						
R <sub>ON</sub>	ON resistance (rail)	170	—	—	—	—	—	—	$\Omega$	2.0	0	100	$V_{CC}$					
		90	180	225	270	180	270	180	$\Omega$	4.5	0	1000	$V_{IH}$ or $V_{IL}$					
		80	160	200	240	160	240	160	$\Omega$	6.0	0	1000	$V_{IL}$					
		65	135	170	205	135	205	135	$\Omega$	4.5	-4.5	1000						
$\Delta R_{ON}$	maximum $\Delta R_{ON}$ resistance between any two channels	—	16	—	—	—	—	—	$\Omega$	2.0	0	—	$V_{CC}$ to $V_{EE}$					
		9	—	—	—	—	—	—	$\Omega$	4.5	0	—	$V_H$ or $V_{IL}$					
		6	—	—	—	—	—	—	$\Omega$	6.0	0	—						
		—	—	—	—	—	—	—	$\Omega$	4.5	-4.5	—						

## Notes

- At supply voltages ( $V_{CC} - V_{EE}$ ) approaching 2.0 V the analog switch ON-resistance becomes extremely non-linear. Therefore it is recommended that these devices are used to transmit digital signals only, when using these supply voltages.
- For test circuit measuring  $R_{ON}$  see Fig.8.

## Quad bilateral switches

## 74HC/HCT4316

## DC CHARACTERISTICS FOR 74HC

Voltages are referenced to GND (ground = 0 V)

SYMBOL	PARAMETER	T <sub>amb</sub> (°C)							UNIT	TEST CONDITIONS								
		74HC								V <sub>CC</sub> (V)	V <sub>EE</sub> (V)	V <sub>I</sub>	OTHER					
		+25			−40 to +85		−40 to +125											
		min.	typ.	max.	min.	max.	min.	max.										
V <sub>IH</sub>	HIGH level input voltage	1.5 3.15 4.2 6.3	1.2 2.4 3.2 4.3		1.5 3.15 4.2 6.3		1.5 3.15 4.2 6.3		V	2.0 4.5 6.0 9.0								
V <sub>IL</sub>	LOW level input voltage		0.8 2.1 2.8 4.3	0.5 1.35 1.8 2.7		0.5 1.35 1.8 2.7		0.5 1.35 1.8 2.7	V	2.0 4.5 6.0 9.0								
±I <sub>I</sub>	input leakage current			0.1 0.2		1.0 2.0		1.0 2.0	µA	6.0 10.0	0 0	V <sub>CC</sub> or GND						
±I <sub>S</sub>	analog switch OFF-state current			0.1		1.0		1.0	µA	10.0	0	V <sub>IH</sub> or V <sub>IL</sub>	V <sub>S</sub>   = V <sub>CC</sub> − V <sub>EE</sub> (see Fig.10)					
±I <sub>S</sub>	analog switch ON-state current			0.1		1.0		1.0	µA	10.0	0	V <sub>IH</sub> or V <sub>IL</sub>	V <sub>S</sub>   = V <sub>CC</sub> − V <sub>EE</sub> (see Fig.11)					
I <sub>CC</sub>	quiescent supply current			8.0 16.0		80.0 160.0		160.0 320.0	µA	6.0 10.0	0 0	V <sub>CC</sub> or GND	V <sub>is</sub> = V <sub>EE</sub> or V <sub>CC</sub> ; V <sub>OS</sub> = V <sub>CC</sub> or V <sub>EE</sub>					

## Quad bilateral switches

## 74HC/HCT4316

## AC CHARACTERISTICS FOR 74HC

GND = 0 V;  $t_r = t_f = 6$  ns;  $C_L = 50$  pF

SYMBOL	PARAMETER	$T_{amb}$ ( $^{\circ}$ C)							UNIT	TEST CONDITIONS						
		74HC								V <sub>CC</sub> (V)	V <sub>EE</sub> (V)	OTHER				
		+25			−40 to +85		−40 to +125									
		min.	typ.	max.	min.	max.	min.	max.								
$t_{PHL}/t_{PLH}$	propagation delay $V_{IS}$ to $V_{OS}$	17 6 5 4	60 12 10 8		75 15 13 10		90 18 15 12	ns	2.0 4.5 6.0 4.5	0 0 0 −4.5	$R_L = \infty$ ; $C_L = 50$ pF (see Fig.18)					
$t_{PZH}/t_{PZL}$	turn “ON” time $\bar{E}$ to $V_{OS}$	61 22 18 19	205 41 35 37		255 51 43 47		310 62 53 56	ns	2.0 4.5 6.0 4.5	0 0 0 −4.5	$R_L = 1$ k $\Omega$ ; $C_L = 50$ pF (see Figs 19, 20 and 21)					
$t_{PZH}/t_{PZL}$	turn “ON” time $nS$ to $V_{OS}$	52 19 15 17	175 35 30 34		220 44 37 43		265 53 45 51	ns	2.0 4.5 6.0 4.5	0 0 0 −4.5	$R_L = 1$ k $\Omega$ ; $C_L = 50$ pF (see Figs 19, 20 and 21)					
$t_{PHZ}/t_{PLZ}$	turn “OFF” time $\bar{E}$ to $V_{OS}$	63 23 18 21	220 44 37 39		275 55 47 49		330 66 56 59	ns	2.0 4.5 6.0 4.5	0 0 0 −4.5	$R_L = 1$ k $\Omega$ ; $C_L = 50$ pF (see Figs 19, 20 and 21)					
$t_{PHZ}/t_{PLZ}$	turn “OFF” time $nS$ to $V_{OS}$	55 20 16 18	175 35 30 36		220 44 37 45		265 53 45 54	ns	2.0 4.5 6.0 4.5	0 0 0 −4.5	$R_L = 1$ k $\Omega$ ; $C_L = 50$ pF (see Figs 19, 20 and 21)					

## Quad bilateral switches

## 74HC/HCT4316

## DC CHARACTERISTICS FOR 74HCT

Voltages are referenced to GND (ground = 0)

SYMBOL	PARAMETER	T <sub>amb</sub> (°C)							UNIT	TEST CONDITIONS								
		74HCT								V <sub>CC</sub> (V)	V <sub>EE</sub> (V)	V <sub>I</sub>	OTHER					
		+25			−40 to +85		−40 to +125											
		min.	typ.	max.	min.	max.	min.	max.										
V <sub>IH</sub>	HIGH level input voltage	2.0	1.6		2.0		2.0		V	4.5 to 5.5								
V <sub>IL</sub>	LOW level input voltage		1.2	0.8		0.8		0.8	V	4.5 to 5.5								
±I <sub>I</sub>	input leakage current			0.1		1.0		1.0	μA	5.5	0	V <sub>CC</sub> or GND						
±I <sub>S</sub>	analog switch OFF-state current			0.1		1.0		1.0	μA	10.0	0	V <sub>IH</sub> or V <sub>IL</sub>	V <sub>S</sub>   = V <sub>CC</sub> − V <sub>EE</sub> (see Fig.10)					
±I <sub>S</sub>	analog switch ON-state current			0.1		1.0		1.0	μA	10.0	0	V <sub>IH</sub> or V <sub>IL</sub>	V <sub>S</sub>   = V <sub>CC</sub> − V <sub>EE</sub> (see Fig.11)					
I <sub>CC</sub>	quiescent supply current			8.0 16.0		80.0 160.0		160.0 320.0	μA	5.5 5.0	0 −5.0	V <sub>CC</sub> or GND	V <sub>IS</sub> = V <sub>EE</sub> or V <sub>CC</sub> ; V <sub>OS</sub> = V <sub>CC</sub> or V <sub>EE</sub>					
ΔI <sub>CC</sub>	additional quiescent supply current per input pin for unit load coefficient is 1 (note 1)		100	360		450		490	μA	4.5 to 5.5	0	V <sub>CC</sub> − 2.1 V	other inputs at V <sub>CC</sub> or GND					

## Note

- The value of additional quiescent supply current ( $\Delta I_{CC}$ ) for a unit load of 1 is given here.  
To determine  $\Delta I_{CC}$  per input, multiply this value by the unit load coefficient shown in the table below.

INPUT	UNIT LOAD COEFFICIENT
nS	0.50
Ē	0.50

## Quad bilateral switches

74HC/HCT4316

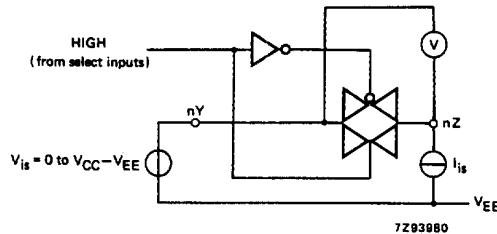
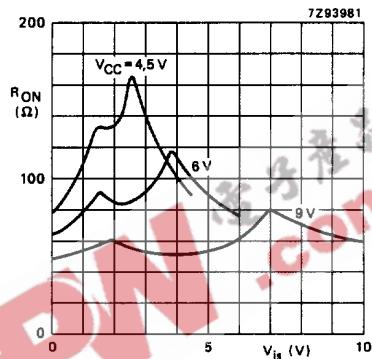
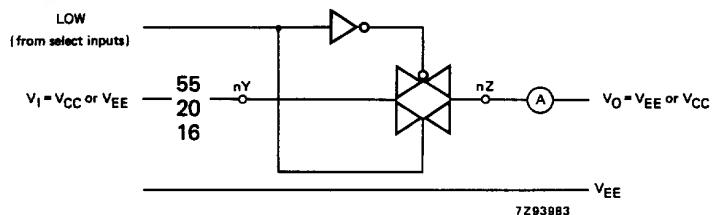
Fig.8 Test circuit for measuring  $R_{ON}$ .Fig.9 Typical  $R_{ON}$  as a function of input voltage  $V_{IS}$  for  $V_{IS} = 0$  to  $V_{CC} - V_{EE}$ .

Fig.10 Test circuit for measuring OFF-state current.

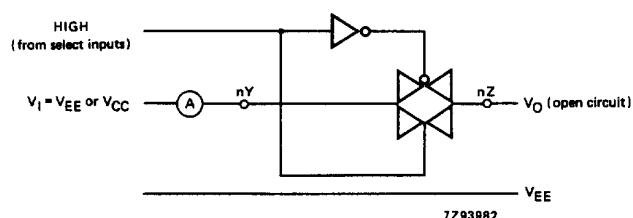


Fig.11 Test circuit for measuring ON-state current.

## Quad bilateral switches

## 74HC/HCT4316

## AC CHARACTERISTICS FOR 74HCT

GND = 0 V;  $t_r = t_f = 6$  ns;  $C_L = 50$  pF

SYMBOL	PARAMETER	$T_{amb}$ ( $^{\circ}$ C)						UNIT	TEST CONDITIONS					
		74HCT							V <sub>CC</sub> (V)	V <sub>EE</sub> (V)	OTHER			
		+25			-40 TO +85		-40 to +125							
		min.	typ.	max.	min.	max.	min.	max.						
$t_{PHL}/t_{PLH}$	propagation delay $V_{is}$ to $V_{os}$		6 4	12 8		15 10		18 12	ns	4.5 4.5	0 -4.5	$R_L = \infty$ ; $C_L = 50$ pF (see Fig.18)		
$t_{PZH}$	turn "ON" time $\bar{E}$ to $V_{os}$		22 21	44 42		55 53		66 63	ns	4.5 4.5	0 -4.5	$R_L = 1$ k $\Omega$ ; $C_L = 50$ pF (see Figs 19, 20 and 21)		
$t_{PZL}$	turn "ON" time $\bar{E}$ to $V_{os}$		28 21	56 42		70 53		84 63	ns	4.5 4.5	0 -4.5			
$t_{PZH}$	turn "ON" time $nS$ to $V_{os}$		20 17	40 34		53 43		60 51	ns	4.5 4.5	0 -4.5	$R_L = 1$ k $\Omega$ ; $C_L = 50$ pF (see Figs 19, 20 and 21)		
$t_{PZL}$	turn "ON" time $nS$ to $V_{os}$		25 17	50 34		63 43		75 51	ns	4.5 4.5	0 -4.5			
$t_{PHZ}/t_{PLZ}$	turn "OFF" time $\bar{E}$ to $V_{os}$		25 23	50 46		63 58		75 69	ns	4.5 4.5	0 -4.5	$R_L = 1$ k $\Omega$ ; $C_L = 50$ pF (see Figs 19, 20 and 21)		
$t_{PHZ}/t_{PLZ}$	turn "OFF" time $nS$ to $V_{os}$		22 20	44 40		55 50		66 60	ns	4.5 4.5	0 -4.5	$R_L = 1$ k $\Omega$ ; $C_L = 50$ pF (see Figs 19, 20 and 21)		

## Quad bilateral switches

## 74HC/HCT4316

## ADDITIONAL AC CHARACTERISTICS FOR 74HC/HCT

## Recommended conditions and typical values

GND = 0 V;  $T_{amb}$  = 25 °C

SYMBOL	PARAMETER	typ.	UNIT	$V_{CC}$ (V)	$V_{EE}$ (V)	$V_{IS(p-p)}$ (V)	CONDITIONS
	sine-wave distortion $f = 1$ kHz	0.80 0.40	% %	2.25 4.5	-2.25 -4.5	4.0 8.0	$R_L = 10$ kΩ; $C_L = 50$ pF (see Fig.14)
	sine-wave distortion $f = 10$ kHz	2.40 1.20	% %	2.25 4.5	-2.25 -4.5	4.0 8.0	$R_L = 10$ kΩ; $C_L = 50$ pF (see Fig.14)
	switch "OFF" signal feed-through	-50 -50	dB dB	2.25 4.5	-2.25 -4.5	note 1	$R_L = 600$ Ω; $C_L = 50$ pF $f = 1$ MHz (see Figs 12 and 15)
	crosstalk between any two switches	-60 -60	dB dB	2.25 4.5	-2.25 -4.5	note 1	$R_L = 600$ Ω; $C_L = 50$ pF; $f = 1$ MHz; (see Fig.16)
$V_{(p-p)}$	crosstalk voltage between control and any switch (peak-to-peak value)	110 220	mV mV	4.5 4.5	0 -4.5		$R_L = 600$ kΩ; $C_L = 50$ pF; $f = 1$ MHz ( $E$ or nS, square-wave between $V_{CC}$ and GND, $t_r = t_f = 6$ ns) (see Fig.17)
$f_{max}$	minimum frequency response (-3 dB)	150 160	MHz MHz	2.25 4.5	-2.25 -4.5	note 2	$R_L = 50$ Ω; $C_L = 10$ pF (see Figs 13 and 14)
$C_S$	maximum switch capacitance	5	pF				

## Notes

1. Adjust input voltage  $V_{IS}$  to 0 dBm level (0 dBm = 1 mW into 600 Ω).
2. Adjust input voltage  $V_{IS}$  to 0 dBm level at  $V_{OS}$  for 1 MHz (0 dBm = 1 mW into 50 Ω).

## General note

 $V_{IS}$  is the input voltage at an nY or nZ terminal, whichever is assigned as an input. $V_{OS}$  is the output voltage at an nY or nZ terminal, whichever is assigned as an output.

Test conditions:  
 $V_{CC} = 4.5$  V; GND = 0 V;  $V_{EE} = -4.5$  V;  
 $R_L = 50$  Ω;  $R_{source} = 1$  kΩ.

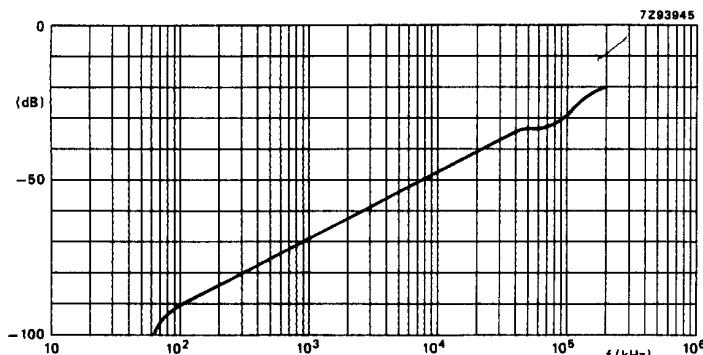


Fig.12 Typical switch "OFF" signal feed-through as a function of frequency.

## Quad bilateral switches

74HC/HCT4316

Test conditions:  
 $V_{CC} = 4.5 \text{ V}$ ;  $\text{GND} = 0 \text{ V}$ ;  $V_{EE} = -4.5 \text{ V}$ ;  
 $R_L = 50 \Omega$ ;  $R_{\text{source}} = 1 \text{ k}\Omega$ .

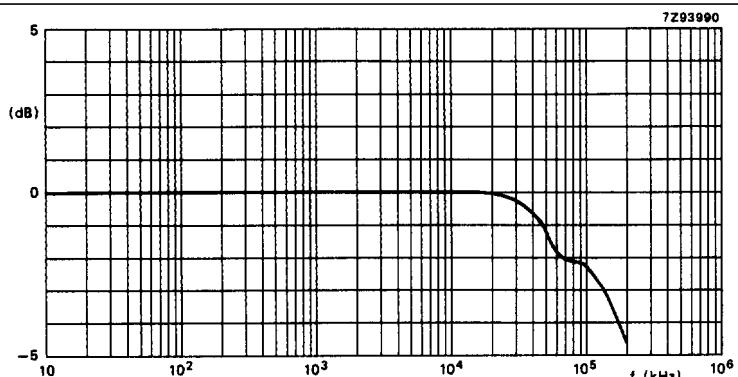


Fig.13 Typical frequency response.

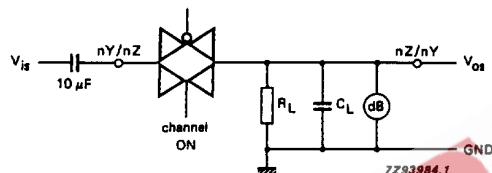


Fig.14 Test circuit for measuring sine-wave distortion and minimum frequency response.







Fig.15 Test circuit for measuring switch "OFF" signal feed-through.

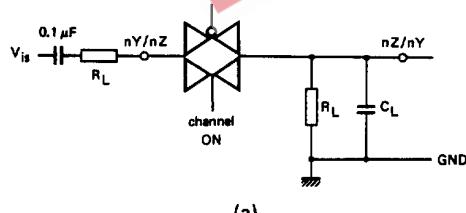

(a)

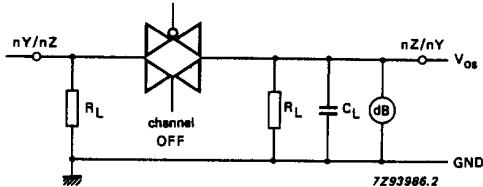

(b)

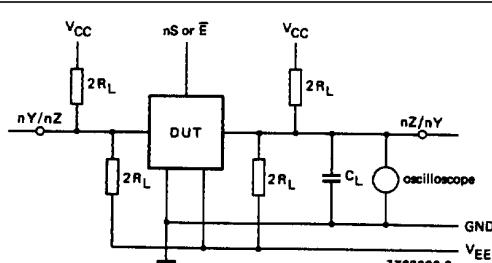Fig.16 Test circuit for measuring crosstalk between any two switches.  
 (a) channel ON condition; (b) channel OFF condition.

The crosstalk is defined as follows  
 (oscilloscope output):





Fig.17 Test circuit for measuring crosstalk between control and any switch.

## Quad bilateral switches

74HC/HCT4316

## AC WAVEFORMS

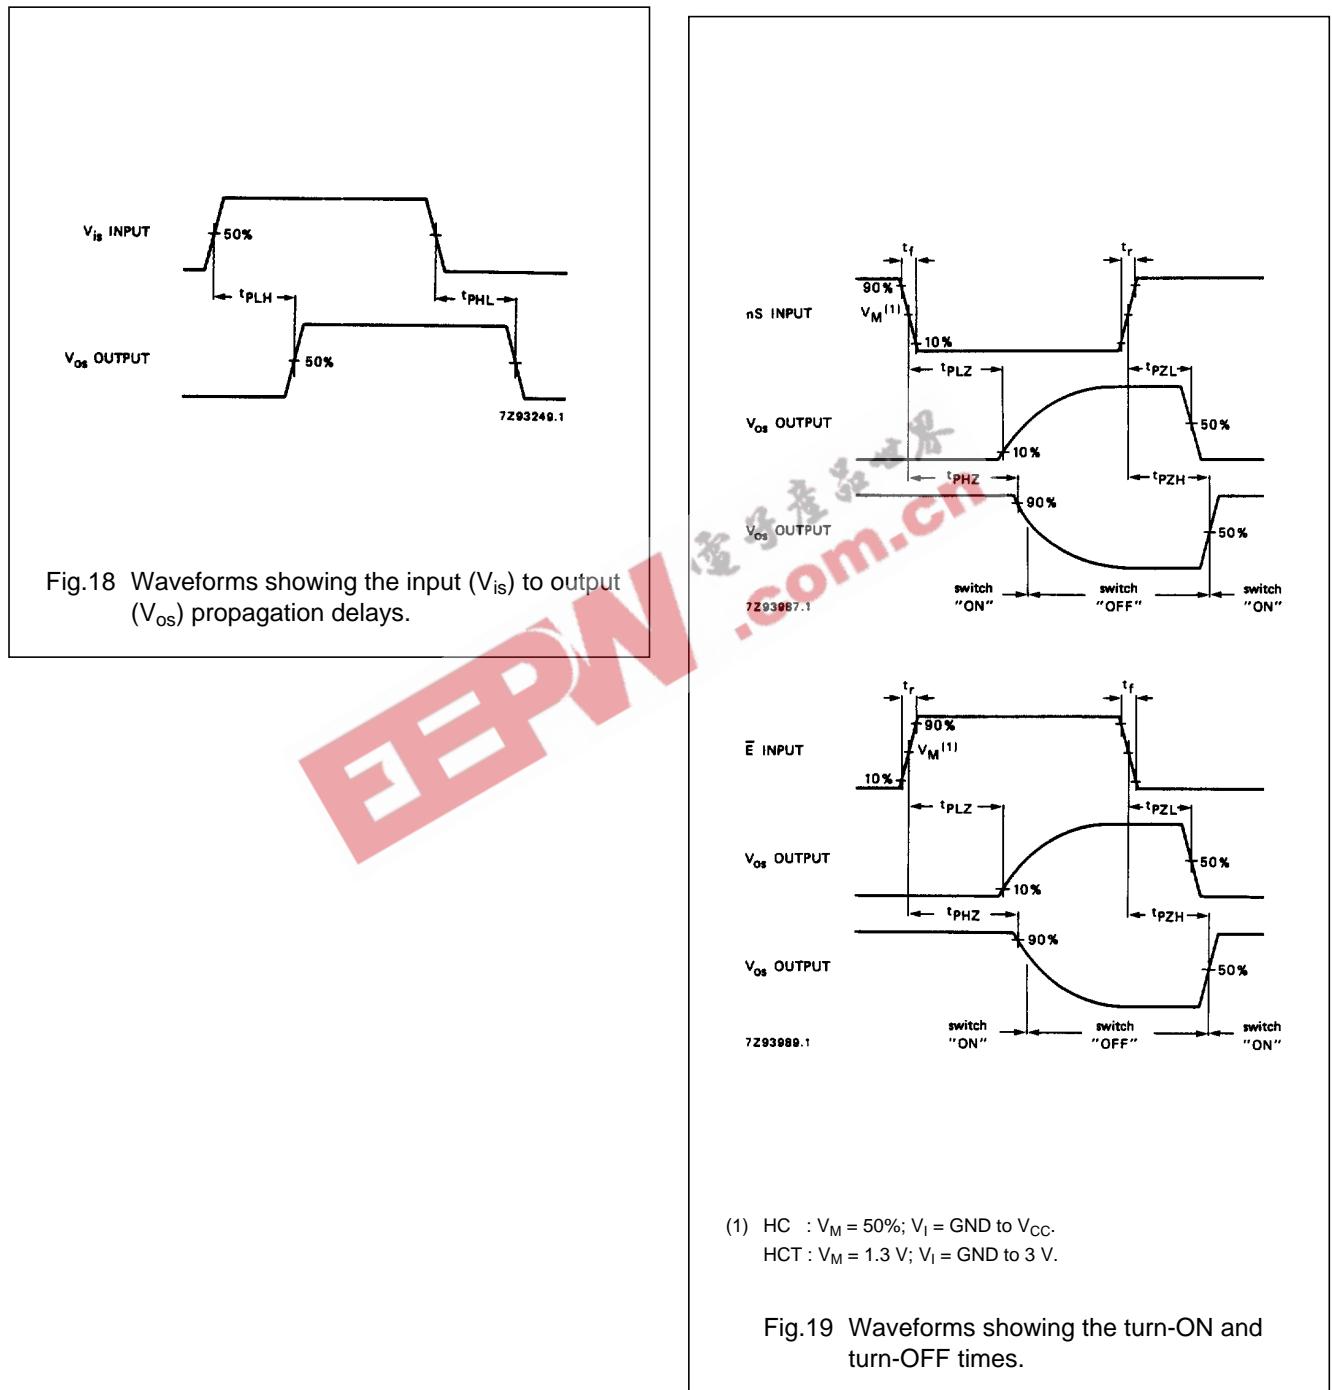

## Quad bilateral switches

74HC/HCT4316

## TEST CIRCUIT AND WAVEFORMS

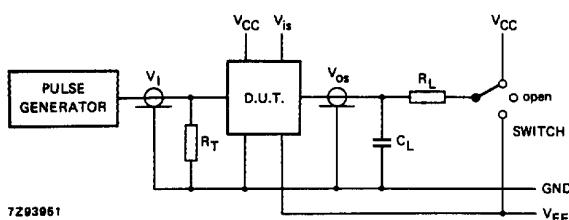


Fig.20 Test circuit for measuring AC performance.

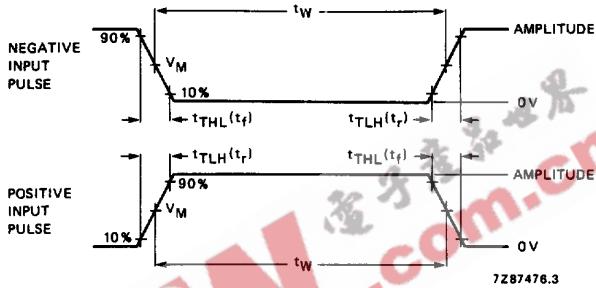


Fig.21 Input pulse definitions.

## Conditions

TEST	SWITCH	$V_{IS}$
$t_{PZH}$	$V_{EE}$	$V_{CC}$
$t_{PZL}$	$V_{CC}$	$V_{EE}$
$t_{PHZ}$	$V_{EE}$	$V_{CC}$
$t_{PLZ}$	$V_{CC}$	$V_{EE}$
others	open	pulse

FAMILY	AMPLITUDE	$V_M$	$t_r; t_f$	
			$f_{max};$ PULSE WIDTH	OTHER
74HC	$V_{CC}$	50%	< 2 ns	6 ns
74HCT	3.0 V	1.3 V	< 2 ns	6 ns

Definitions for Figs 20 and 21:

 $C_L$  = load capacitance including jig and probe capacitance (see AC CHARACTERISTICS for values). $R_T$  = termination resistance should be equal to the output impedance  $Z_O$  of the pulse generator. $t_r = t_f = 6$  ns; when measuring  $f_{max}$ , there is no constraint to  $t_r, t_f$  with 50% duty factor.

## PACKAGE OUTLINES

See "74HC/HCT/HCU/HCMOS Logic Package Outlines".