

Am2833/2533

1024-Bit Static Shift Registers

Distinctive Characteristics


- Second source to Signetics 2533
- All inputs are low-level DTL/TTL compatible
- Static operation with single clock input.
- 100% reliability assurance testing in compliance with MIL-STD-883.
- DC to 2.0MHz operation with Am2833

FUNCTIONAL DESCRIPTION

The Am2533/2833 is a quasi-static 1024-bit MOS shift register using low-threshold P-channel silicon gate technology.

The device has a single TTL/DTL compatible clock input, Cp. Data in the register is stored in static, cross-coupled latches while the clock is LOW, so that the clock may be stopped indefinitely in the LOW state. When the clock shifts from LOW to HIGH to LOW a dynamic transfer of data occurs from one static latch to the next. The input of the register is a two-input multiplexer with both data inputs available. A select line, S, determines whether data will be accepted from the I₀ input (S = LOW) or the I₁ input (S = HIGH). The register can be placed in the recirculate mode by tying the output, O, to one of the data inputs, and using the select line as a write/recirculate control. The Am2833 is functionally identical to the Am2533 but has superior performance over an extended temperature range.


LOGIC SYMBOL



V_{CC} = Pin 8
V_{GG} = Pin 2
V_{DD} = Pin 4

MOS-429

LOGIC DIAGRAM

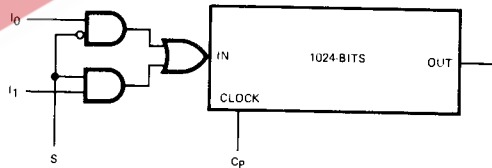


MOS-430

ORDERING INFORMATION

Package Type	Temperature Range	Am2533 Order Number	Am2833 Order Number
Molded DIP	0°C to +70°C	AM2533V	AM2833PC
Hermetic DIP	0°C to +70°C	AM2533DC	AM2833DC
Hermetic DIP	-55°C to +125°C		AM2833DM

CONNECTION DIAGRAM Top View



Note: Pin 1 marked for orientation

MOS-431

MAXIMUM RATING (Above which the useful life may be impaired)

Storage Temperature	-65°C to +150°C
Temperature (Ambient) Under Bias	-55°C to +125°C
V _{DD} Supply Voltage	V _{CC} -20V to V _{CC} +0.3V
V _{GG} Supply Voltage	V _{CC} -20V to V _{CC} +0.3V
DC Input Voltage	V _{CC} -20V to V _{CC} +0.3V

OPERATING RANGE

Part No.	Temperature	V _{CC}	V _{GG}	V _{DD}
Am2833PC/Am2533PC Am2833DC/Am2533DC	0°C to +70°C	5.0V ±5%	-12V ±5%	0V
Am2833DM	-55°C to +125°C	5.0V ±5%	-12V ±5%	0V

ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE (Unless Otherwise Noted)

Parameters	Description	Test Conditions	Min.	Typ. (Note 1)	Max.	Units
V _{OH}	Output HIGH Voltage	V _{CC} = MIN., I _{OH} = -100μA	2.4	3.5		Volts
V _{OL}	Output LOW Voltage	V _{CC} = MIN., I _{OL} = 1.6mA		0.2	0.4	Volts
V _{IH}	Input HIGH Level	Guaranteed input logical HIGH voltage for all inputs	V _{CC} -1 (Note 3)		V _{CC} +0.3	Volts
V _{IL}	Input LOW Level	Guaranteed input logical LOW voltage for all inputs	V _{GG}		0.8	Volts
I _{IL}	Input LOW Current	V _{CC} = MAX., V _{IN} = 0V, T _A = 25°C		10	500	nA
I _{IH}	Input HIGH Current	T _A = 25°C, V _{IN} = V _{CC} -1.0 (Note 3)	-150	-300		μA
I _{IT}	Peak input transition current (Note 3)	1.5 ≤ V _{SS} - V _{IN} ≤ 4.0, T _A = 25°C			-1.6	mA
V _I max	Voltage at maximum input current	T _A = 25°C	V _{SS} -4.0	V _{SS} -3.0	V _{SS} -1.5	V
I _{CC}	V _{CC} Power Supply Current	f = 1.5MHz		16	30	mA
		Am2533		16	54	
		Am2833PC, DC		20	70	
I _{GG}	V _{GG} Power Supply Current	f = 1.5MHz		-5.0	-7.5	mA
		Am2533		-5.0	-14	
		Am2833PC, DC		-7.0	-18	

Notes: 1. Typical limits are at V_{CC} = 5.0V, V_{GG} = -12V, 25°C ambient.

2. Power supply currents are with inputs and outputs open.

3. A special input pull-up circuit becomes active at V_{IN} = V_{SS} -3.5V to pull the internal input node up to the MOS threshold. To return the internal node to the LOW state, current must be drawn from the MOS input. This current is maximum at approximately 2.0V.


SWITCHING CHARACTERISTICS OVER OPERATING RANGE (Unless Otherwise Noted)

Parameters	Description	Test Conditions	Am2533			Am2833			Units
			Min.	Typ. (Note 1)	Max.	Min.	Typ. (Note 1)	Max.	
f _{max}	Maximum Clock Frequency		1.5	2.0		2.0	3.0		MHz
t _{φpwL}	Clock LOW Time		0.250		∞	0.200		∞	μs
t _{φpwH}	Clock HIGH Time		0.350		100	0.250		100	μs
t _r , t _f	Clock Rise and Fall Times				1			1	μs
t _s (I)	Set-up Time, I _Q or I ₁ Input (see definitions)	t _r = t _f ≤ 25ns	50			50			ns
t _h (I)	Hold Time, I _Q or I ₁ Input (see definitions)		50			50			ns
t _s (S)	Set-up Time, S Input (see definitions)		80			80			ns
t _h (S)	Hold Time, S Input (see definitions)		50			50			ns
t _{pd}	Delay, Clock to Output LOW or HIGH	R _L = 2.9k, C _L = 20pF			300			300	ns
t _{pr} , t _{pf}	Output Rise and Fall Times	10% to 90%			150			150	ns
C _{in}	Capacitance, Any Input (Note 2)	f = 1MHz, V _{IN} = V _{CC}		3	5		3	5	pF

Notes: 1. Typical limits are at V_{CC} = 5.0V, V_{GG} = -12.0V and T_A = 25°C



2. This parameter is periodically sampled but not 100% tested. It is guaranteed by design.

TIMING DIAGRAM

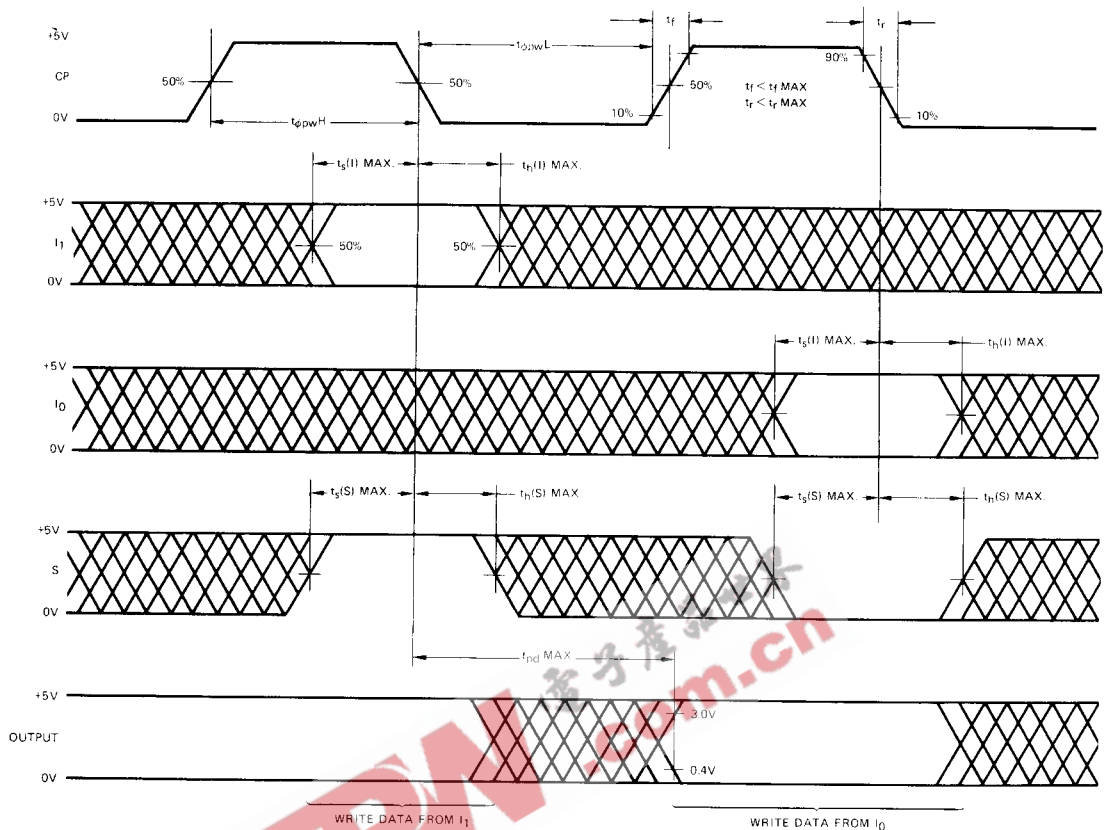

MOS-432

TYPICAL PERFORMANCE CURVES

Power Dissipation
Versus Ambient Temperature t_{PD} as a Function
of Ambient Temperature


MOS-433

DEFINITION OF TERMS

STATIC SHIFT REGISTER A shift register that is capable of maintaining stored data without being continuously clocked. Most static shift registers are constructed with dynamic master and static slave flip-flops. The data is stored dynamically while the clock is HIGH and is transferred to the static slaves while the clock is LOW. The clock may be stopped indefinitely in the LOW state, but there are limitations on the time it may reside in the HIGH state.

SET-UP and HOLD TIMES The shift register will accept the data that is present on its input around the time the clock goes from HIGH-to-LOW. Because of variations in individual devices, there is some uncertainty as to exactly when, relative to this clock transition, the data will be stored. The set-up and hold times define the limits on this uncertainty. To guarantee storing the correct data, the data inputs should not be changed between the maximum set-up time before the clock transition and the maximum hold time after the clock transition. Data changes within this interval may or may not be detected.

APPLICATIONS

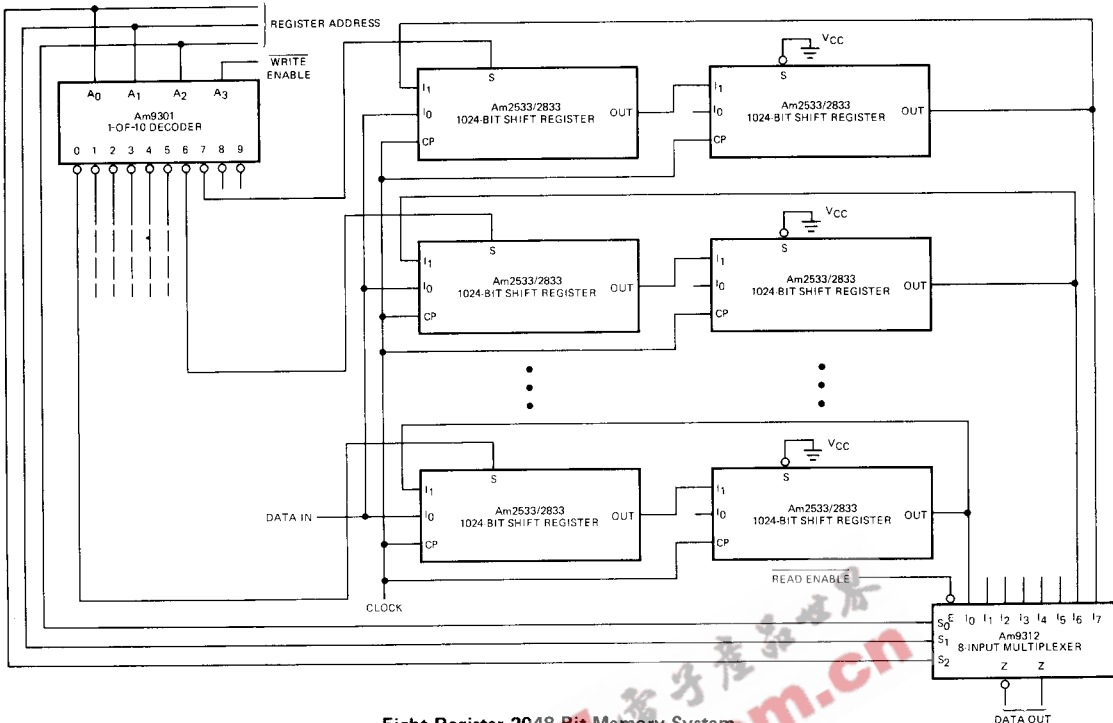

Eight Register 2048-Bit Memory System

Data enters one of the eight 2048-bit registers when the write enable input to the decoder is LOW. The addressed register will accept the data on the data input; the other seven registers will recirculate their data. Outputs are driven directly into an Am9312 8-input multiplexer. Obviously, the read and write registers need not be the same.


MOS-434

TRUTH TABLE

S	I ₀	I ₁	Data Entered
L	L	X	L
L	H	X	H
H	X	L	L
H	X	H	H

H = HIGH Voltage level
L = LOW Voltage Level
X = Don't Care

Metallization and Pad Layout



DIE SIZE: 0.133" X 0.163"