


# AM1214-250

# RF POWER TRANSISTORS L-BAND RADAR APPLICATIONS

TARGET DATA

- REFRACTORY /GOLD METALLIZATION
- EMITTER SITE BALLASTING
- LOW RF THERMAL RESISTANCE
- INPUT/OUTPUT MATCHING
- OVERLAY GEOMETRY
- METAL/CERAMIC HERMETIC PACKAGE
- P<sub>OUT</sub> = 300 W MIN. WITH 8.0 dB GAIN
- 1215-1400 MHz OPERATION

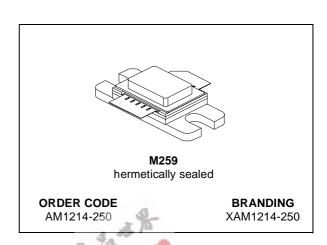

### **DESCRIPTION**

The AM1214-250 is a rugged, Class C common base device designed for new L - Band medium & long pulse radar applications.

Minimal amplitude droop over a long pulse of 500 microsec. is guaranteed by a thermal design incorporating an overlay site-ballasted die geometry.

# PIN CONNECTION 1 4 2 3 1. Collector 2. Base 3. Emitter 4. Base

### ABSOLUTE MAXIMUM RATINGS (T<sub>CASE</sub> = 25°C)

Symbol	Parameter	Value	Unit
P <sub>DISS</sub>	Power Dissipation (T <sub>C</sub> ≤ 85°C)*	786	W
Ic	Device Current*	21	Α
V <sub>CBO</sub>	Collector-Base Voltage	70	V
Tj	Operating Junction Temperature	+250	°C
T <sub>STG</sub>	Storage Temperature	-65 to +200	°C

### THERMAL DATA

_				
	R <sub>th(j-c)</sub>	Junction -Case Thermal Resistance*	0.21	°C/W

<sup>\*</sup> Applies only to rated RF amplifier operation: 150 microsec / 10%

July 2000 1/4

## **ELECTRICAL SPECIFICATION (T<sub>CASE</sub> = 25°C)**

### **STATIC**

Symbol		Test Conditions	Min.	Тур.	Max.	Unit
BV <sub>CBO</sub>	I <sub>C</sub> = 50 mA	$I_E = 0 \text{ mA}$	70			V
BV <sub>CES</sub>	I <sub>C</sub> = 50 mA	V <sub>BE</sub> = 0 V	70			V
BV <sub>EBO</sub>	I <sub>E</sub> = 20 mA	I <sub>C</sub> = 0 mA	3.5			V
I <sub>CES</sub>	V <sub>CE</sub> = 40 V	$V_{BE} = 0 V$			10	mA
h <sub>FE</sub>	V <sub>CE</sub> = 5 V	$I_C = 0.5 A$	10			

### DYNAMIC @ 150 MICROSEC / 10 %

Symbol		Min.	Тур.	Max.	Unit		
Pout	f = 1215 - 1400 MHz	P <sub>IN</sub> = 40 W	$V_{CC} = 50 \text{ V}$	300	350		W
ης	f = 1215 - 1400 MHz	P <sub>IN</sub> = 40 W	V <sub>CC</sub> = 50 V	40	45		%
G <sub>P</sub>	f = 1215 - 1400 MHz	P <sub>IN</sub> = 40 W	V <sub>CC</sub> = 50 V	8.75	9.4		dB

### DYNAMIC @ 500 MICROSEC / 10 %


10			00					
G <sub>P</sub>	f = 1215 - 1400 MHz	P <sub>IN</sub> = 40 W	V <sub>CC</sub> = 50 V	8.75	9.4		dB	
DYNAMIC @ 500 MICROSEC / 10 %								
Symbol		Test Conditions		Min.	Тур.	Max.	Unit	
Pout	f = 1215 - 1400 MHz	P <sub>IN</sub> = 40 W	V <sub>CC</sub> = 42 V	225	250		W	
ης	f = 1215 - 1400 MHz	P <sub>IN</sub> = 40 W	V <sub>CC</sub> = 42 V	40	45		%	
G <sub>P</sub>	f = 1215 - 1400 MHz	P <sub>IN</sub> = 40 W	$V_{CC} = 42 \text{ V}$	7.5	8.0		dB	

47/ 2/4

# M259 (.400 x .500 SUPER WIDE 2/L HERM. W/FLG) MECHANICAL DATA

DIM	mm			Inch			
DIM.	MIN.	TYP.	MAX	MIN.	MIN. TYP.		
А	7.49		7.75	.295		.305	
В	19.56		21.08	.770		.830	
С	9.65		9.91	.380		.390	
D	3.18		3.43	.125		.135	
Е		4.90			.193		
F	10.03		10.34	.395		.407	
G	12.45		12.95	.490		.510	
Н	16.38		16.64	.645		.655	
I		3.18			.125		
J	22.61		23.11	.890		.910	
K	0.05		0.15	.002		.006	
L	1.40		1.65	.055	S.	.065	
М	2.79		3.30	.110	-10	.130	
N			5.84	37		.230	

# M259, Package Outline

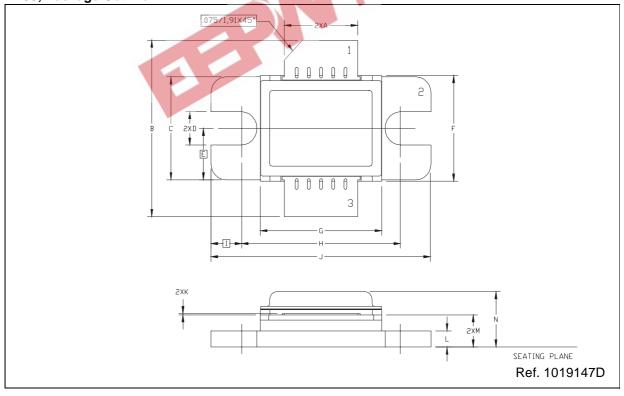



Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is registered trademark of STMicroelectronics ® 2000 STMicroelectronics - All Rights Reserved

All other names are the property of their respective owners.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

http://www.st.com

477