


**VICOR CONFIDENTIAL**

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
02	RELEASED PER ECO 2321	1/15/91	BJR
03	REDRAWN AND REVISED PER E980221	7/2/98	DPK

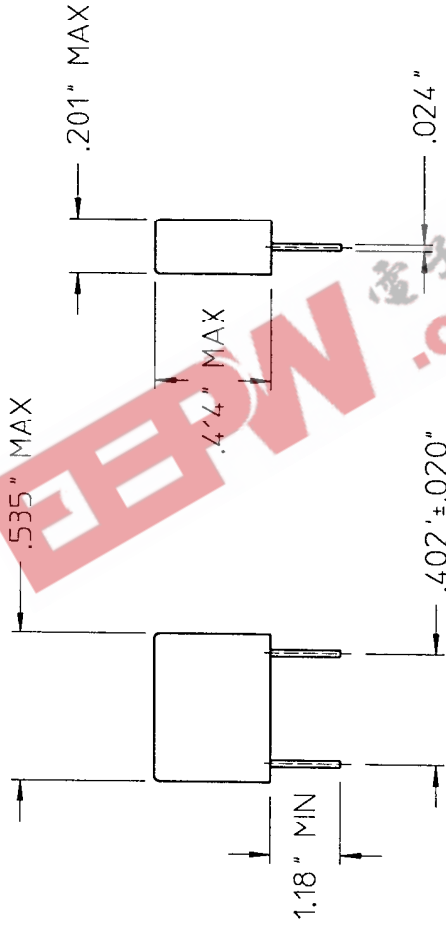

ORIGINAL  
ONLY WHEN STAMPED  
IN RED

**ELECTRICAL SPECIFICATIONS**

RATED VOLTAGE	250 VAC
CAPACITANCE	4700 pF
CAPACITANCE TOLERANCE	±20%
CLASS	Y CLASS
DISSIPATION FACTOR	1.3% @ 1k-Hz
DIELECTRIC VOLTAGE	2700 VDC
INSULATION RESISTANCE @ 500VDC	≥ 12000MΩ
RECOMMENDED VOLTAGE IN DC APPLICATION	≥ 1000 VDC
TEMPERATURE RANGE	-40 TO +85°C

NOTES:

- APPROVALS INCLUDE SEMKO, NEMKO, DEMKC, EI, VDE, SEV, OVE, IMQ, UL, CSA.

**COPY**

DRAWN BY	DATE	7/2/98
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		
+1/64 .XX+.00 .1°		
THIRD ANGLE PROJECTION		
DO NOT SCALE DRAWING		
VICOR		
CAPACITOR - (Y)		
4700 pF ±20%, 250 VAC		
SIZE	FSCM NO.	REV
B	67131	03
SCALE	DWG NO	SHEET 1 OF 1
2:1	01000	