


VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,
USED, OR DISCLOSED IN WHOLE OR IN PART
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	
01	DRAWN AN
02	REVISED P

APPROVALS

COUNTRY	SPECIFICATION	APPROVAL REFERENCE	APPROVAL MARK
USA UL	UL 1414	E183844	UL
CANADA CSA	C22.2, N-1-94	LR64546-10	CSA
EUROPEAN COMMUNITY EEC	EN132400, IEC384-14.2	(X1) 183694-01 (X2) 189686-01	EEC 384-14/2

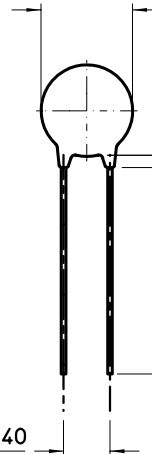

MARKINGS

CAPACITANCE	CLEAR TEXT (VALUE IN nF)
RATED VOLTAGE	CLEAR TEXT: 250V - Y2
CLIMATE CATEGORY	CLEAR TEXT: GKF
APPROVAL MARKS	SEE TABLE
CAPACITOR TYPE	CLEAR TEXT: WYO
MANUFACTURER SYMBOL	

SPECIFICATIONS

MAT'L: EPOXY RESIN DIPPED
CAPACITANCE VALUE: 4700pF
CAPACITANCE TOLERANCE: ±5%
RATED VOLTAGE: Y2 = 250V
TEST VOLTAGE: 1800 VAC,
(current limitation: 50mA)
INSULATION RESISTANCE: ≥ 600 MΩ
DISSIPATION FACTOR TAN δ: ≤ 0.002
TEMPERATURE RANGE: -40°C to 105°C
CLIMATE CATEGORY: GKF ACCORDING TO IEC 60068-1
IEC TEST CLASSIFICATION: 4D
TO EN60068-1
INSULATED TYPE ACCORDING TO IEC 60068-1
(TEST VOLTAGE 2000 VAC)
FLAME RETARDANT

DRAWN BY	DATE
D.P. KELLY	11/8
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES #1/64 .001 .01 #1/32 .002 .01 #1/16 .005 .01 #1/8 .01 .01 #1/4 .01 .01 #1/2 .01 .01 #3/4 .01 .01 #1 .01 .01 #1 1/4 .01 .01 #1 1/2 .01 .01 #2 .01 .01 #3 .01 .01 #4 .01 .01 #5 .01 .01 #6 .01 .01 #8 .01 .01 #10 .01 .01 #12 .01 .01 #16 .01 .01 #20 .01 .01 #25 .01 .01 #32 .01 .01 #40 .01 .01 #50 .01 .01 #63 .01 .01 #80 .01 .01 #100 .01 .01 #125 .01 .01 #160 .01 .01 #200 .01 .01 #250 .01 .01 #315 .01 .01 #400 .01 .01 #500 .01 .01 #630 .01 .01 #800 .01 .01 #1000 .01 .01	
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	