
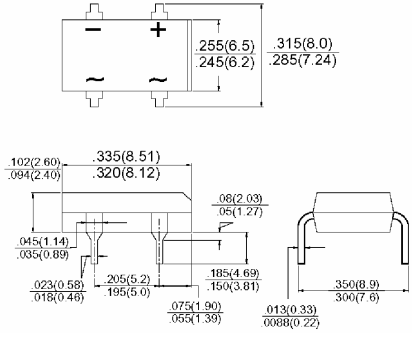
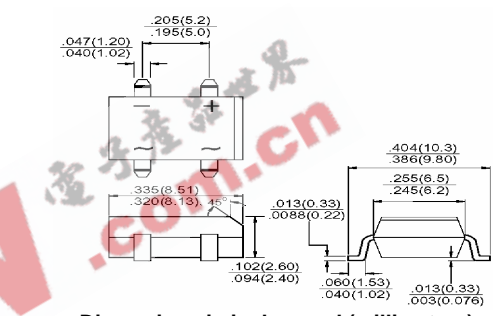
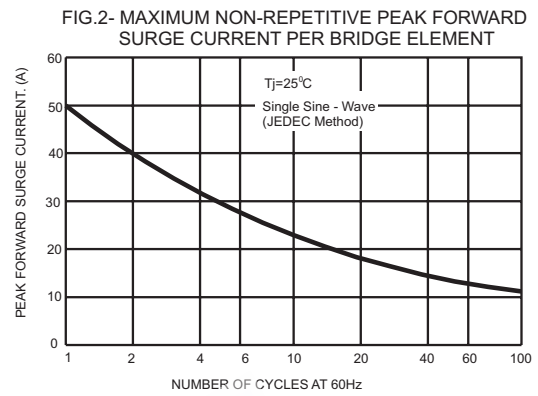
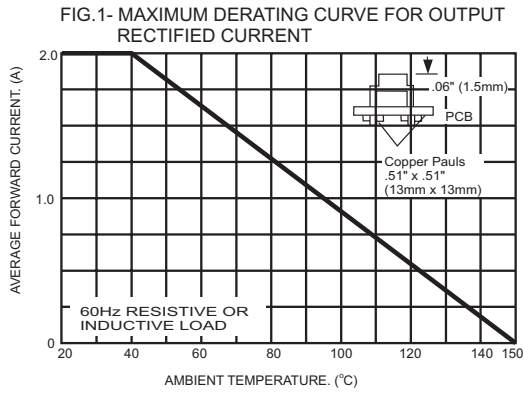
		<h2 style="text-align: center;">DBL201G THRU DBL209G</h2> <p style="text-align: center;">Single Phase 2.0 AMPS. Glass Passivated Bridge Rectifiers</p>									
		Voltage Range 50 to 1400 Volts Current 2.0 Amperes									
<h3>Features</h3> <ul style="list-style-type: none"> <li>✧ Glass passivated junction</li> <li>✧ Ideal for printed circuit board</li> <li>✧ Reliable low cost construction utilizing molded plastic technique</li> <li>✧ High surge current capability</li> <li>✧ High temperature soldering guaranteed: 260°C / 10 seconds at 5 lbs., ( 2.3 kg ) tension</li> <li>✧ Small size, simple installation</li> <li>✧ Leads solderable per MIL-STD-202 Method 208</li> </ul>		<div style="text-align: center;"> <h4>DBL</h4>  <h4>DBLS</h4>  <p style="text-align: center;"><b>Dimensions in inches and (millimeters)</b></p> </div>									
<h3>Maximum Ratings and Electrical Characteristics</h3> <p>Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%</p>											
Type Number	Symbol	DBL 201G	DBL 202G	DBL 203G	DBL 204G	DBL 205G	DBL 206G	DBL 207G	DBL 208G	DBL 209G	Units
		DBLS 201G	DBLS 202G	DBLS 203G	DBLS 204G	DBLS 205G	DBLS 206G	DBLS 207G	DBLS 208G	DBLS 209G	
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	1200	1400	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	840	980	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	1200	1400	V
Maximum Average Forward Rectified Current @ $T_A = 40^\circ C$	$I_{(AV)}$	2.0									A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method )	$I_{FSM}$	50									A
Maximum Instantaneous Forward Voltage @ 2.0A	$V_F$	1.15						1.30			V
Maximum DC Reverse Current @ $T_A=25^\circ C$ at Rated DC Blocking Voltage @ $T_A=125^\circ C$	$I_R$	10 500									$\mu A$ $\mu A$
Typical Thermal Resistance (Note)	R $\theta$ JA R $\theta$ JL	40 15									$^\circ C/w$
Operating Temperature Range	$T_J$	-55 to +150									$^\circ C$
Storage Temperature Range	$T_{STG}$	-55 to +150									$^\circ C$


Note: Thermal resistance from Junction to Ambient and from Junction to Lead Mounted on P.C.B. with 0.51 x 0.51" (13 x 13mm) Copper Pads.




## RATINGS AND CHARACTERISTIC CURVES (DBL201G THRU DBL209G)



**FIG.3- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT**

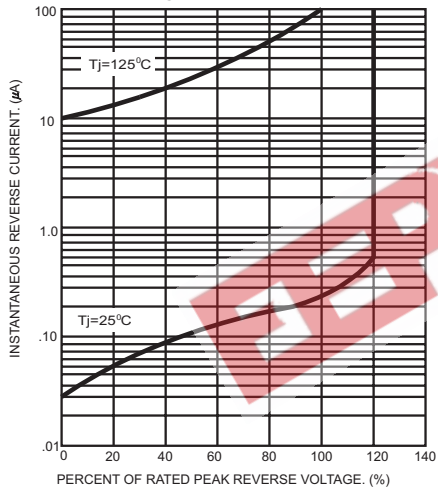

**FIG.4- TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT**

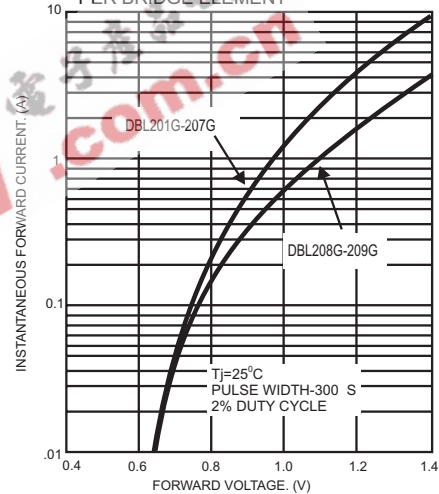

**FIG.5- TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT**

