

■ FEATURES:

- Surface Mount Ceramic base Weld Metal lid Package with 4 pads
- Stable frequency characteristics over temperature and drive level
- Packed in Embossed Carrier Tape & Reel for Automatic Handling (Standard 1,000 piece/reel compliant with EIA-481-2)

■ APPLICATIONS:

Surface mount 3.5 x 6.0mm x 1.2mm Max. crystal is ideal for application to high-density circuit boards with reliable precision & excellent shock performance in wireless telecommunications devices.

■ ELECTRICAL SPECIFICATIONS:

|   |  |
|---|--|
| CTS Crystal Model Number  | 406  |
| Operating Mode of Oscillation & Cut   | Fundamental/3 <sup>rd</sup> OT & AT-cut  |
| Frequency Range   | 10.0 to 50.0 MHz   |
| Frequency Calibration Tolerance @ 25°C  | ±30ppm Standard<br>( Other tighter tolerances are available; See P/N System ).               |
| Frequency Stability Tolerance<br>( Ref. to 25°C readings over Operating Temperature Range ) | ±50ppm Standard.<br>( Other tighter tolerances are available; See P/N System ).              |
| Operating Temperature Range   | -20°C to +70°C Standard.<br>( Extended -40°C to +85°C is available; See P/N System ).        |
| Storage Temperature Range   | -55°C to +125°C in a non-operating condition   |
| Drive Level   | 25 µw Typical & 100 µw Maximum   |
| Equivalent Series Resistance Maximum (ESR Max.)   | See ESR Table  |
| Resonance Mode (To be specified by customer)  | S for Series or Parallel with load capacitance<br>13Pf, 18Pf, 20Pf, Etc. ( See P/N System ). |
| Surface Mount Temperature Reflow Condition  | 255°C ±5°C & 10 Sec. Max.  |
| Shunt Capacitance (C0)  | 4.0 pF Max. ( 2.5 ±0.5 pF Typ.)  |

■ ESR Table:


| Frequency Range (MHz) | Mode of Oscillation | ESR Max. (Ohms) |
|-----------------------|---------------------|-----------------|
| 10.000 ~ 15.999 MHz   | Fundamental         | 60              |
| 16.000 ~ 42.000 MHz   | Fundamental         | 40              |
| 30.000 ~ 50.000 MHz   | 3 <sup>rd</sup> OT  | 80              |

■ PART NUMBERING SYSTEM for Ordering Information:



Part Number Examples: 406C35A14M31818, 406I33H24M00000

**MECHANICAL SPECIFICATIONS:** 4 Pad Terminations plated with 0.3 to 1.0 µm gold (Au).

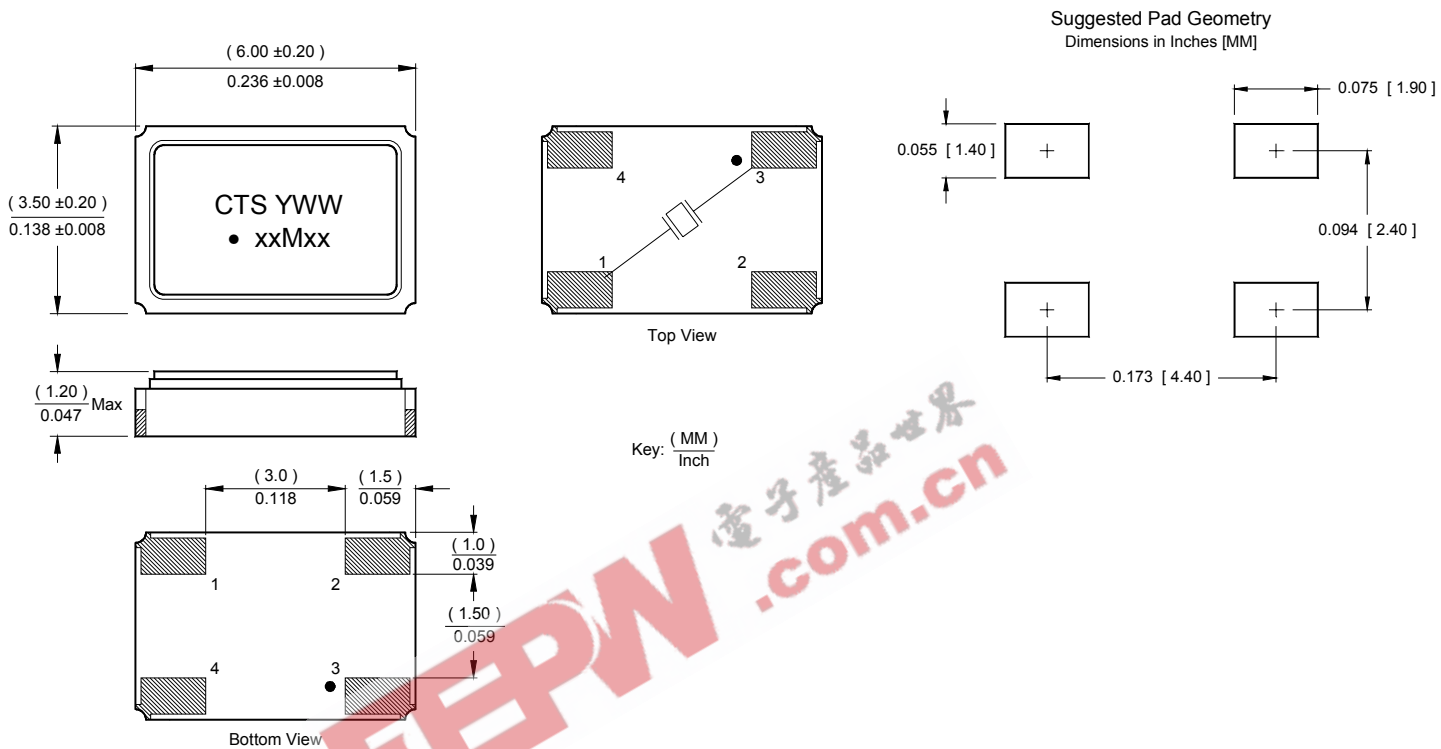

■ **PRODUCT MARKING:**

- YWW = Date Code (last digit of year & week number)
- xxMxx = Frequency shall be marked with 2 significant digits to the right of the "M".  
*(Customer specified codes maximum 6 characters can be marked instead of frequency)*

■ **QUALITY AND RELIABILITY:**

- Quality Systems meet or exceed the requirements of ISO 9000: 2000 standards.
- Reliability Audits are performed on this or similar products with results available upon request.

■ **ENVIRONMENTAL SPECIFICATIONS:**

- Storage Temperature: -55°C to +125°C in a non-operating condition & no degradation of performance following such exposure
- Temperature Cycle: 400 cycles, -55°C to +125°C, 10 min dwell, 1 min transfer
- Mechanical Shock: 1,500g's, 0.5mS, ½ sine wave, 3 shocks each direction, in 3 planes
- Sinusoidal Vibration: 0.06" D.A., 10 to 55 Hz and 20g's, 55 to 2,000 Hz, 3 cycles per plane
- Gross Leak: No leak shall appear while immersed in an FC40 or equivalent liquid at 125°C for 20 seconds
- Fine Leak: Mass spectrometer leak rates less than  $2 \times 10^{-8}$  atm. cc/sec of Helium
- Resistance to Soldering Heat: Product must survive 3 reflows of 260°C peak, 10 seconds maximum
- High Temperature Operating Bias: 2,000 hours at 125°C, disregarding frequency shift
- Frequency Aging:  $\leq 5$  ppm shift in 1,000 hours at 85°C
- Insulation Resistance: 500 M $\Omega$  @ 100  $\pm$ 15VDC

■ **TAPE AND REEL PACKAGING INFORMATION:**

Standard packaging quantity shall be 1,000 pieces on a 180mm reel compliant with Standard EIA-481-2

