




Industrial Connectors CA-COM

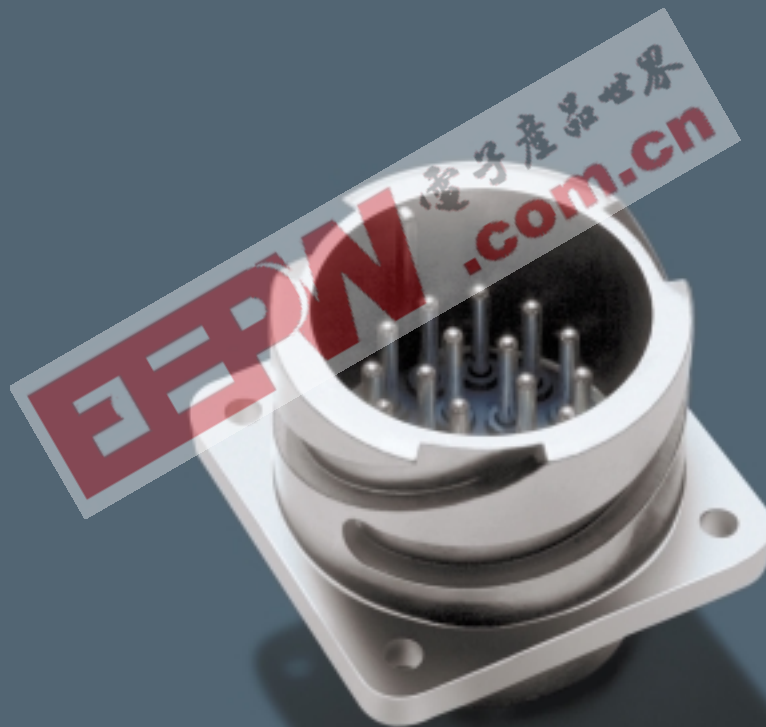

COM-7/0300

Can



both CA-COM series are interchangeable with the corresponding types as per MIL-C-5015 and VG95234, as they offer the same mounting dimensions and contact arrangements.

The CA-COM and CA-COM-B connector series offer


- Wall mounting receptacles
- Cable connecting plugs
- Box mounting receptacles
- Straight plugs
- Plugs 90°

Wall mounting receptacles and cable connecting plugs (straight and 90°) are available with

- Endbell with cable clamp
- Endbell for flex tubes
- Adapter combined for PG terminations acc. to DIN 46320
- Adapter for heat shrink boots

Furthermore Cannon also provides the appropriate accessories like

- Protective metal caps
- Sash chains
- Cable clamps
- Cable bushings
- Sealing gaskets

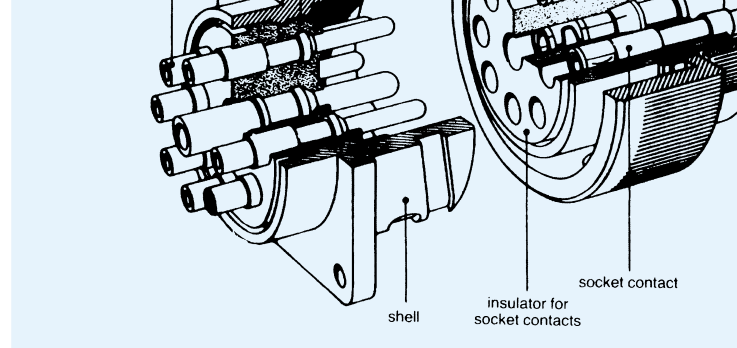

CA-COM

- Threaded coupling
- Mateable with all connectors according to MIL-C-5015 and series CA respectively
- Either solder or crimp contacts
- Contact arrangements with 1 to 37 contacts
- Wire sizes from 0,14 up to 2,5 mm²
- Shells made of aluminum alloy enable to withstand high mechanical strain*
- Surface protected by nickel plating
- Resilient insulator (polychloroprene) for wide temperature range (-55/125°C)
- Resistant against aggressive fluids like fuel, oil, etc.
- Environmental by means of an adapter for PG termination, universal endbell and heat shrink boots
- Min 500 mating cycles
- Spray-waterproof IP67

CA-COM-B

- Bayonet coupling
- Mateable with all connectors according to VG95234 and series CA respectively
- Either solder or crimp contacts
- Contact arrangements with 1 to 37 contacts
- Wire sizes from 0,14 up to 2,5 mm²
- Shells made of aluminum alloy enable to withstand high mechanical strain*
- Surface protected by nickel plating
- Resilient insulator (polychloroprene) for wide temperature range (-55/125°C)
- Resistant against aggressive fluids like fuel, oil, etc.
- Environmental by means of an adapter for PG termination, universal endbell and heat shrink boots
- Min 500 mating cycles
- Waterproof (1 bar, 12h)

Contents

Introduction	2
Connector design	2
Technical data	3
How to order	4
Contact arrangements	5


Mounting dimensions
Separating and coupling
Shell styles and dimensions
Accessories
Contact dimensions
Tools
Product safety information

Note: * Receptacle size 14S and barrels size 18 + 20 are made of Zr material.

15S	22
15	22
25	41
100	74

¹⁾ This applies only to the max. rated current for one contact. If several contacts in one contact arrangement are loaded with higher current the specific heat and the ambient temperature may not exceed +125°C.

Rated current vs. ambient temperature

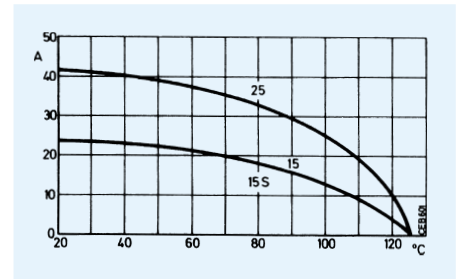

Contact resistance (Millivolt test)

Contact size metric	Contact resistance mΩ max
15S	6
15	6
25	3
100	1

Insulation resistance > 1000 MΩ

Air and creepage paths mm (min)

Voltage class	Instr.	A	D
Air path mm	0,7	1,1	2,8
Creepage path mm	0,7	1,1	2,8

Operating Voltage and connector usage

When the connectors in this catalogue are used for voltages greater than 50 Volts and have touchable conductive shell parts they must be used in accordance with the safety regulations DIN VDE Part 410; IEC 60364-4-41. This regulation basically dictates that the power source should be turned off before any mating and unmating of the connector, this regulation does not provide for protection against electrical shock when mating and unmating the connectors in the live condition.

Min separating distance	
Contact size metric	
15S	
15	
25	
100	
Contact retention force	
Test force to be applied	
Contact size metric	
15S	
15	
25	
100	
Coupling torque	
The allowable coupling torque tested under harsh conditions	
Shell size	Allowable closing force (N max)
	CA-COM
10SL	3,0
12S	2,8
14S	5,9
16S/16	7,0
18	8,0
20	9,0
22	10,6
24	12,9
28	16,7
32	18,1
36	23,9
Materials	
Shell	Aluminum
Contacts	Copper
Insulator	Polycarbonate



EEPW.com 电子世界



- 00 - Wall mount receptacle
- 01 - Cable connecting plug
- 02 - Box mount receptacle
- 20 - Box mount receptacle for rear wall mounting (Bayonett coupling only)
- 06 - Plug, straight
- 08 - Plug 90°

Class

- COM-E - Endbell with cable clamp ¹⁾
- COM-F - Endbell for flex tube
- COM-PG - Adapter for PG termination, environmental
- COM-L - PCB Solder termination
- COM-IN - universal endbell

Shell size

10SL, 12S, 14S, 16, 16S, 18,
20, 22, 24, 28, 32*, 36* (* = upon request)

Contact arrangement

see pages 6 – 8

Contact type

- P - Pin contact
- S - Socket contact

Alternate insert position

Insert insulator position – see page 9

Coupling

- B - Bayonet coupling
- without designation: threaded coupling

Modification

- 01 - metric crimp contacts
- 03 - Adapter for heat shrink boots and metric crimp contacts (only for bayonet coupling by shell style 01 + 06 class -E)
- 06 - Adapter for heat shrink boots and solder contacts (only for bayonet coupling by shell style 01 + 06 class -E)
- 44 - with end ring and grommet (for class E and F only)
- 48 - F-Endbell with O-ring
- DN - Adapter for heat shrink boots and solder contacts (Mod. for threaded coupling)
- F0 - without contacts (to be ordered separately)

¹⁾ except shell style 02 / 20

10SL	10SL-3	3	15S	0,75 –
	10SL-4	2	15S	0,75 –
12S	12SA10	4	15S	0,75 –
14S	14S-2	4	15S	0,75 –
	14S-5	5	15S	0,75 –
	14S-6	6	15S	0,75 –
	14SA7	7	15S	0,75 –
16	16-10	3	25	2,0 – 3
16S	16S-1	7	15S	0,75 –
18	18-1	10	15	0,75 –
	18-8	7 + 1	15 + 25	1 – 1,5
	18-10	4	25	2,0 – 3
	18-11	5	25	2,0 – 3
	18-12	6	15	0,75 –
20	20-15	7	25	2,0 – 3
	20-17	1	15	0,75 –
		5	25	2,0 – 3
	20-19	3	100	10
	20-27	14	15	0,75 –
	20-29	17	15	0,75 –
22	22-14	19	15	0,75 –
	22-19	14	15	0,75 –
	22-23	8	25	2,0 – 3
24	24-28	24	15	0,75 –
28	28-15	35	15	0,75 –

Additional contact arrangements (per MIL-C-5015 and VG95234) up

Wire selection

Contact size	Wire sizes for crimp and solder c	
Metric	Metric	Condu
	mm ²	Ø mm
15S	0,75 – 1,5	1,6 –
15	0,75 – 1,5	1,6 –
25	2,0 – 3,0	2,9 –
100	10,0	4,2 –

Stripping lengths of wires

Strip wires carefully. Do not damage conductors and insulation.

For solder connections, wires have to be pretinned. Do not use crimp contacts, otherwise no perfect crimp connection will be achieved. Clean conductors before crimping. Film of grease or lubricants on the conductors reduces crimp quality.

Stripping length for contacts sizes 15S, 15 and 25 is 6,2 mm.

Cannon  ITT Industries






	3	10SL-3 15S	A	-	-	-	-
	2	10SL-4 15S	A	-	-	-	-
	4	12SA10 15S	A	-	-	-	-
	4	14S-2 15S	Inst.	-	120	240	-
	5	14S-5 15S	Inst.	-	110	-	-
	6	14S-6 15S	Inst.	-	-	-	-
	7	14SA7 15S	Inst.	-	-	-	-
	7	16S-1 15S	A	-	-	-	-
	3	16-10 25	A	90	180	270	-





	10	18-1 15	A (B, C, F, G)	70	145	-
	8 1 7	18-8 15 25	A	70	-	-
	4	18-10 25	A	-	120	240
	5	18-11 25	A	-	170	265
	6	18-12 15	A	80	-	-
	7	20-15 25	A	80	-	-
	6 1 5	20-17 15 25	A	90	180	270
	3	20-19 100	A	90	180	270
	14	20-27 15	A	35	110	250





	17	20-29 15	A	80	-	-	280
	19	22-14 15	A	80	-	-	280
	14	22-19 15	A	80	110	250	280
	8	22-23 25	D(H) A (all others)	35	-	250	-
	24	24-28 15	Inst.	80	110	250	280
	35	28-15 15	A	80	110	250	280
	37	28-21 15	A	80	110	250	280



Contact arrangement	W	X	Y
10SL-3	-	-	-
10SL-4	-	-	-
12SA10	-	-	-
14S-2	-	120	240
14S-5	-	110	-
14S-6	-	-	-
14SA7	-	-	-
16S-1	-	-	-
16-10	90	180	270
18-1	70	145	-
18-8	70	-	-
18-10	-	120	240
18-11	-	170	265
18-12	80	-	-
20-15	80	-	-
20-17	90	180	270
20-19	90	180	270
20-27	35	110	250
20-29	80	-	-
22-14	80	-	-
22-19	80	110	250
22-23	35	-	250
24-28	80	110	250
28-15	80	110	250
28-21	80	110	250

EEPW 电子產品世界
.com.cn


Cannon  ITT Industries

Shell size	CA-COM Threaded		d H ₁₃	E-0,15	CA-COM-Ba
	D H ₁₂ CA00... CA20...	CA02...			D H ₁₂ CA00... CA20...
10SL	16,0	16,4	3,4	18,2	18,5
12S	19,1	16,4	3,4	20,6	21,7
14S	22,3	19,7	3,4	23,0	24,9
16S/16	25,5	22,9	3,4	24,6	27,7
18	28,7	26,1	3,4	27,0	31,1
20	31,8	29,5	3,4	29,4	34,5
22	35,0	32,7	3,4	31,8	37,8
24	38,2	36,0	3,9	34,9	41,3
28	44,5	42,0	3,9	39,7	47,1
32	50,9	48,3	4,6	44,5	53,8
36	57,2	53,1	4,6	49,2	60,0




EEPW 电子產品世界
.com.cn



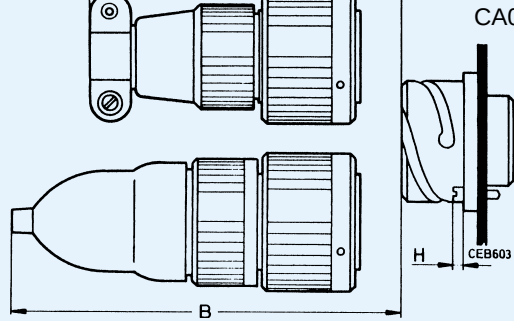


CA06COM-E-DN
CA06COM-E-B-03/-06

CA06COM-F
CA06COM-F-B

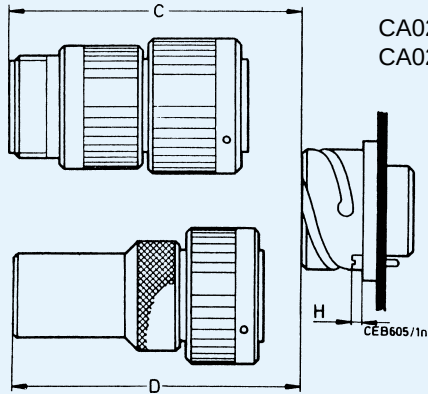

CA06COM-PG
CA06COM-PG-B

CA08COM-E
CA08COM-E-B

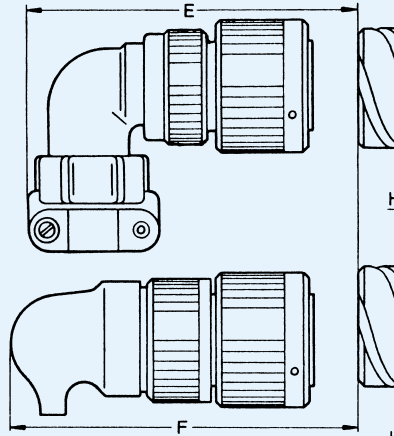

CA06COM-E-DN
CA06COM-E-B


CA0
CA2
CA0
CA2

Shell size	A min	B min	C min	D min	E min
10SL	70	70	65	80	70
12S	70	75	65	80	75
14S	70	75	65	80	75
16S	70	90	65	80	65
16	80	100	70	100	90
18	80	100	70	110	95
20	80	100	70	110	95
22	80	100	70	110	95
24	110	120	90	120	105
28	110	120	90	120	105
32	110	180	90	120	115
36	110	190	100	130	120

Cannon  ITT Industries



CA00COM-PG-B is a wall mounting receptacle for usage of PG terminations. It mates with plugs CA06COM-B and CA08COM-B.

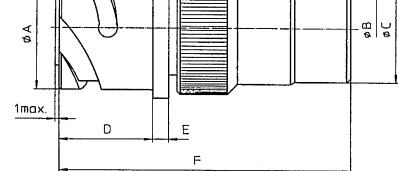


Part No.	A	B	C	D	E	F	G	H
Pin insert*	-0,15	Thread	max	+0,4	± 0,2	max	± 0,1	± 0,1
CA00COM-PG10SL-**-P*-B-	18,2	PG9	18	18,2	2,8	56	18,2	25,4
CA00COM-PG12S-**-P*-B-	21,4	PG9	18	18,2	3,2	56	20,6	28,0
CA00COM-PG14S-**-P*-B-	24,6	PG11	22	18,2	3,2	56	23,0	30,0
CA00COM-PG16S-**-P*-B-	27,4	PG13,5	24	18,2	3,2	58	24,6	32,0
CA00COM-PG16-**-P*-B-	27,4	PG13,5	24	21,5	3,2	66	24,6	32,0
CA00COM-PG18-**-P*-B-	30,8	PG13,5	25	23,05	4,0	73	27,0	35,0
CA00COM-PG20-**-P*-B-	34,2	PG16	27	23,05	4,0	74	29,4	38,0
CA00COM-PG22-**-P*-B-	37,4	PG16	27	23,05	4,0	77	31,8	41,0
CA00COM-PG24-**-P*-B-	40,9	PG16	27	23,05	4,0	77	34,9	44,0
CA00COM-PG28-**-P*-B-	46,7	PG21	32	24,05	4,0	78	39,7	50,0
CA00COM-PG32-**-P*-B-	53,4	PG29	41	24,05	4,0	78	44,5	57,0
CA00COM-PG36-**-P*-B-	59,6	PG29	41	24,05	4,0	89	49,2	63,0



CA00COM-PG with threaded coupling

CA00COM-PG is a wall mounting receptacle for usage of PG terminations. It mates with plugs CA06COM and CA08COM.

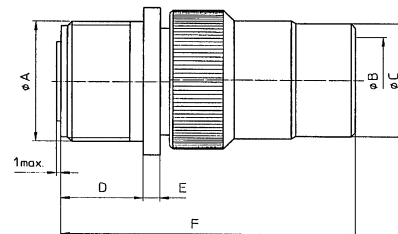

Part No.	A	B	C	D	E	F	G	H
Pin insert*	Thread	Thread	max	+0,4	± 0,3	max	± 0,1	± 0,1
CA00COM-PG10SL-**-P*	5/8-24UNEF-2A	PG9	18	14,2	2,8	52	18,2	25,4
CA00COM-PG12S-**-P*	3/4-20UNEF-2A	PG9	19	14,2	3,2	52	20,6	28,0
CA00COM-PG14S-**-P*	7/8-20UNEF-2A	PG11	22	14,2	3,2	52	23,0	30,0
CA00COM-PG16S-**-P*	1-20UNEF-2A	PG13,5	24	14,2	3,2	54	24,6	32,0
CA00COM-PG16-**-P*	1-20UNEF-2A	PG13,5	24	19,0	3,2	64	24,6	32,0
CA00COM-PG18-**-P*	1-1/8-18UNEF-2A	PG13,5	25	19,0	4,0	69	27,0	35,0
CA00COM-PG20-**-P*	1-1/4-18UNEF-2A	PG16	27	19,0	4,0	70	29,4	38,0
CA00COM-PG22-**-P*	1-3/8-18UNEF-2A	PG16	27	19,0	4,0	73	31,8	41,0
CA00COM-PG24-**-P*	1-1/2-18UNEF-2A	PG16	27	20,6	4,0	74	34,9	44,0
CA00COM-PG28-**-P*	1-3/4-18UNS-2A	PG21	32	20,6	4,0	74	39,7	50,0
CA00COM-PG32-**-P*	2-18UNS-2A	PG29	41	22,2	4,0	76	44,5	57,0
CA00COM-PG36-**-P*	2-1/4-16UN-2A	PG29	41	22,2	4,0	87	49,2	63,0


* For socket inserts substitute "S" for "P"

** Add contact arrangement number (see pages 6 – 8)





CA00COM-B is a wall mounting receptacle with endbell and cable clamp. It mates with plugs CA06COM-B and CA08COM-B.

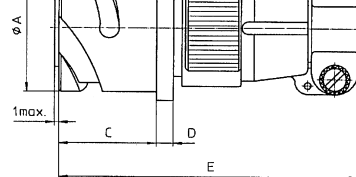


Part No.	A	B ¹⁾	C	D	E	F	G
Pin Insert*	-0,15	+0,4	+0,4	+0,2	max	± 0,1	± 0,1
CA00COM-E10SL-**-P*-B-	18,2	7,9	18,2	2,8	57	18,2	2
CA00COM-E12S-**-P*-B-	21,4	7,9	18,2	3,2	57	20,6	2
CA00COM-E14S-**-P*-B-	24,6	11,1	18,2	3,2	59	23,0	3
CA00COM-E16S-**-P*-B-	27,4	14,2	18,2	3,2	60	24,6	3
CA00COM-E16-**-P*-B-	27,4	14,2	21,5	3,2	68	24,6	3
CA00COM-E18-**-P*-B-	30,8	15,8	23,05	4,0	72	27,0	3
CA00COM-E20-**-P*-B-	34,2	19,0	23,05	4,0	72	29,4	3
CA00COM-E22-**-P*-B-	37,4	19,0	23,05	4,0	72	31,8	4
CA00COM-E24-**-P*-B-	40,9	23,7	23,05	4,0	78	34,9	4
CA00COM-E28-**-P*-B-	46,7	23,7	24,05	4,0	79	39,7	5
CA00COM-E32-**-P*-B-	53,4	31,8	24,05	4,0	78	44,5	5
CA00COM-E36-**-P*-B-	59,6	34,6	24,05	4,0	78	49,2	6



CA00COM-E with threaded coupling

CA00COM-E is a wall mounting receptacle with endbell and cable clamp. It mates with plugs CA06COM and CA08COM.

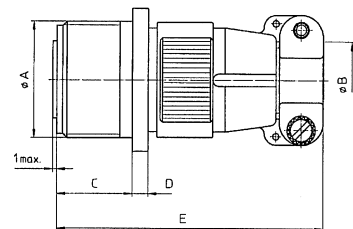

Part No.	A	B ¹⁾	C	D	E	F
Pin Insert*	Thread	+0,4	± 0,3	max	± 0,1	± 0,1
CA00COM-E10SL-**-P*	5/8-24UNEF-2A	7,9	14,2	2,8	53	18,2
CA00COM-E12S-**-P*	3/4-20UNEF-2A	7,9	14,2	3,2	53	20,6
CA00COM-E14S-**-P*	7/8-20UNEF-2A	11,1	14,2	3,2	55	23,0
CA00COM-E16S-**-P*	1-20UNEF-2A	14,2	14,2	3,2	56	24,6
CA00COM-E16-**-P*	1-20UNEF-2A	14,2	19,0	3,2	66	24,6
CA00COM-E18-**-P*	1-1/8-18UNEF-2A	15,8	19,0	4,0	68	27,0
CA00COM-E20-**-P*	1-1/4-18UNEF-2A	19,0	19,0	4,0	68	29,4
CA00COM-E22-**-P*	1-3/8-18UNEF-2A	19,0	19,0	4,0	68	31,8
CA00COM-E24-**-P*	1-1/2-18UNEF-2A	23,7	20,6	4,0	76	34,9
CA00COM-E28-**-P*	1-3/4-18UNS-2A	23,7	20,6	4,0	76	39,7
CA00COM-E32-**-P*	2-18UNS-2A	31,8	22,2	4,0	76	44,5
CA00COM-E36-**-P*	2-1/4-16UN-2A	34,6	22,2	4,0	76	49,2

* For socket inserts substitute "S" for "P"

** Add contact arrangement number (see pages 6 – 8)


¹⁾ max cable dia

Cannon  ITT Industries





CA00COM-F is a wall mounting receptacle with endbell for flex tubes. It mates with plugs CA06COM-B and CA08COM-B.

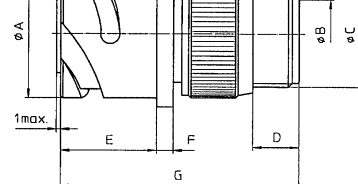


Part No.	A	B ¹⁾	C	D	E	F	G	H
Pin insert*	-0,15		Thread	min	+0,4	± 0,2	max	± 0,1
CA00COM-F10SL-**-P*-B-	18,2	8,2	5/8-24UNEF-2A	9,5	18,2	2,8	50	18,2
CA00COM-F12S-**-P*-B-	21,4	8,2	5/8-24UNEF-2A	9,5	18,2	3,2	50	20,6
CA00COM-F14S-**-P*-B-	24,6	11,1	3/4-20UNEF-2A	9,5	18,2	3,2	50	23,0
CA00COM-F16S-**-P*-B-	27,4	14,3	7/8-20UNEF-2A	9,5	18,2	3,2	50	24,6
CA00COM-F16-**-P*-B-	27,4	14,3	7/8-20UNEF-2A	9,5	21,5	3,2	57	24,6
CA00COM-F18-**-P*-B-	30,8	16,7	1-20UNEF-2A	9,5	23,05	4,0	59	27,0
CA00COM-F20-**-P*-B-	34,2	19,8	1-3/16-18UNEF-2A	9,5	23,05	4,0	59	29,4
CA00COM-F22-**-P*-B-	37,4	19,8	1-3/16-18UNEF-2A	9,5	23,05	4,0	62	31,8
CA00COM-F24-**-P*-B-	40,9	25,4	1-7/16-18UNEF-2A	9,5	23,05	4,0	62	34,9
CA00COM-F28-**-P*-B-	46,7	27,0	1-7/16-18UNEF-2A	9,5	24,05	4,0	64	39,7
CA00COM-F32-**-P*-B-	53,4	32,5	1-3/4-18UNS-2A	11,0	24,05	4,0	64	44,5
CA00COM-F36-**-P*-B-	59,6	35,7	2-18UNS-2A	11,8	24,05	4,0	66	49,2



CA00COM-F with threaded coupling

CA00COM-F is a wall mounting receptacle with endbell for flex tubes. It mates with plugs CA06COM and CA08COM.



Part No.	A	B ¹⁾	C	D	E	F	G	H
Pin Insert*	Thread		Thread	min	+0,4	± 0,3	max	± 0,1
CA00COM-F10SL-**-P*	5/8-24UNEF-2A	8,2	5/8-24UNEF-2A	9,5	14,2	2,8	45	18,2
CA00COM-F12S-**-P*	3/4-20UNEF-2A	8,2	5/8-24UNEF-2A	9,5	14,2	3,2	45	20,6
CA00COM-F14S-**-P*	7/8-20UNEF-2A	11,1	3/4-20UNEF-2A	9,5	14,2	3,2	45	23,0
CA00COM-F16S-**-P*	1-20UNEF-2A	14,3	7/8-20UNEF-2A	9,5	14,2	3,2	45	24,6
CA00COM-F16-**-P*	1-20UNEF-2A	14,3	7/8-20UNEF-2A	9,5	19,0	3,2	54	24,6
CA00COM-F18-**-P*	1-1/8-18UNEF-2A	16,7	1-20UNEF-2A	9,5	19,0	4,0	54	27,0
CA00COM-F20-**-P*	1-1/4-18UNEF-2A	19,8	1-3/16-18UNEF-2A	9,5	19,0	4,0	55	29,4
CA00COM-F22-**-P*	1-3/8-18UNEF-2A	19,8	1-3/16-18UNEF-2A	9,5	19,0	4,0	58	31,8
CA00COM-F24-**-P*	1-1/2-18UNEF-2A	25,4	1-7/16-18UNEF-2A	9,5	20,6	4,0	59	34,9
CA00COM-F28-**-P*	1-3/4-18UNS-2A	27,0	1-7/16-18UNEF-2A	9,5	20,6	4,0	60	39,7
CA00COM-F32-**-P*	2-18UNS-2A	32,5	1-3/4-18UNS-2A	11,0	22,2	4,0	62	44,5
CA00COM-F36-**-P*	2-1/4-16UN-2A	35,7	2-18UNS-2A	11,8	22,2	4,0	64	49,2


* For socket inserts substitute "S" for "P"

** Add contact arrangement number (see pages 6 – 8)

¹⁾ max cable dia



CA00COM-E-B/-03/-00 is a wall mounting receptacle (wire sealing) for heat shrink boots. It mates with plugs CA06COM-B and CA08COM-B.

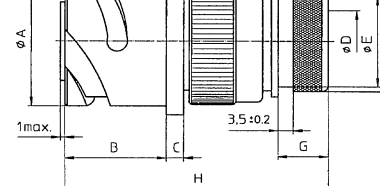


Part No. Pin Insert*	A	B	C	D ¹⁾	E	F	G	H	I
CA00COM-E10SL-**-P*-B-	-0,15	+0,4	± 0,3	7,7	max	± 0,2	± 0,5	max	± 0
CA00COM-E12S-**-P*-B-	18,2	18,2	2,8	7,7	13,3	15,5	11,7	53	18
CA00COM-E14S-**-P*-B-	21,4	18,2	3,2	7,9	13,3	15,5	11,7	53	20
CA00COM-E16S-**-P*-B-	24,6	18,2	3,2	10,6	17,0	19,1	11,7	53	23
CA00COM-E16S-**-P*-B-	27,4	18,2	3,2	13,5	21,9	23,9	11,7	53	24
CA00COM-E16-**-P*-B-	27,4	21,5	3,2	13,5	21,9	23,9	11,5	61	24
CA00COM-E18-**-P*-B-	30,8	23,05	4,0	14,6	21,9	23,9	11,5	62	27
CA00COM-E20-**-P*-B-	34,2	23,05	4,0	18,7	26,2	29,6	12,7	64	29
CA00COM-E22-**-P*-B-	37,4	23,05	4,0	20,8	26,2	29,6	12,7	64	31
CA00COM-E24-**-P*-B-	40,9	23,05	4,0	24,6	34,5	37,8	12,7	64	34
CA00COM-E28-**-P*-B-	45,7	24,05	4,0	27,0	34,5	37,8	12,7	66	39
CA00COM-E32-**-P*-B-	53,4	24,05	4,0	33,3	43,6	47,8	15,2	69	44
CA00COM-E36-**-P*-B-	59,6	24,05	4,0	38,5	43,6	47,8	15,2	70	49



CA00COM-E-DN with threaded coupling

CA00COM-E-DN is a wall mounting receptacle with endbell (wire sealing) for heat shrink boots. It mates with plugs CA06COM and CA08COM.



Part No. Pin Insert*	A	B	C	D ¹⁾	E	F	G	H
CA00COM-E10SL-**-P*-DN	Thread	+0,4	± 0,3	7,7	max	± 0,2	± 0,5	max
CA00COM-E12S-**-P*-DN	5/8-24UNEF-2A	14,2	2,8	7,7	13,3	15,5	11,7	49
CA00COM-E14S-**-P*-DN	3/4-20UNEF-2A	14,2	3,2	7,9	13,3	15,5	11,7	49
CA00COM-E14S-**-P*-DN	7/8-20UNEF-2A	14,2	3,2	10,6	17,0	19,1	11,7	49
CA00COM-E16S-**-P*-DN	1-20UNEF-2A	14,2	3,2	13,5	21,9	23,9	11,7	49
CA00COM-E16-**-P*-DN	1-20UNEF-2A	19,0	3,2	13,5	21,9	23,9	11,5	58
CA00COM-E18-**-P*-DN	1-1/8-18UNEF-2A	19,0	4,0	14,6	21,9	23,9	11,5	58
CA00COM-E20-**-P*-DN	1-1/4-18UNEF-2A	19,0	4,0	14,6	26,2	23,9	12,7	60
CA00COM-E22-**-P*-DN	1-3/8-18UNEF-2A	19,0	4,0	20,8	26,2	29,6	12,7	60
CA00COM-E24-**-P*-DN	1-1/2-18UNEF-2A	20,6	4,0	24,6	34,5	37,8	12,7	63
CA00COM-E28-**-P*-DN	1-3/4-18UNS-2A	20,6	4,0	27,0	34,5	37,8	12,7	63
CA00COM-E32-**-P*-DN	2-18UNS-2A	22,2	4,0	33,3	43,6	47,8	15,2	67
CA00COM-E36-**-P*-DN	2-1/4-16UN-2A	22,2	4,0	38,5	43,6	47,8	15,2	68

* For socket inserts substitute "S" for "P"

** Add contact arrangement number (see pages 6 – 8)


¹⁾ max cable dia

Cannon  ITT Industries





CA01COM-PG-B is a cable connecting plug for usage of PG terminations. It mates with plugs CA06COM-B and CA08COM-B.

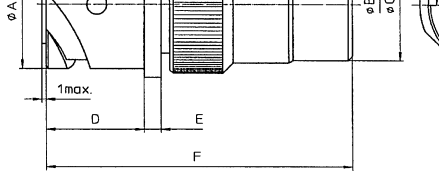


Part No. Pin Insert*	A	B	C	D	E	F	G
CA01COM-PG10SL-**-P*-B	-0,15	Thread	max	+0,4	± 0,2	max	max
CA01COM-PG12S-**-P*-B	18,2	PG9	18	18,2	2,8	56	25,2
CA01COM-PG14S-**-P*-B	21,4	PG9	19	18,2	3,2	56	27,8
CA01COM-PG16S-**-P*-B	24,6	PG11	22	18,2	3,2	56	29,8
CA01COM-PG16S-**-P*-B	27,4	PG13,5	24	18,2	3,2	58	32,3
CA01COM-PG16-**-P*-B	27,4	PG13,5	24	18,2	3,2	66	32,3
CA01COM-PG18-**-P*-B	30,8	PG13,5	25	23,05	4,0	73	34,8
CA01COM-PG20-**-P*-B	34,2	PG16	27	23,05	4,0	74	37,8
CA01COM-PG22-**-P*-B	37,4	PG16	27	23,05	4,0	77	41,1
CA01COM-PG24-**-P*-B	40,9	PG16	27	23,05	4,0	77	44,6
CA01COM-PG28-**-P*-B	46,7	PG21	32	24,05	4,0	78	50,9
CA01COM-PG32-**-P*-B	53,4	PG29	41	24,05	4,0	78	57,1
CA01COM-PG36-**-P*-B	59,6	PG29	41	24,05	4,0	89	63,6



CA01COM-PG with threaded coupling

CA01COM-PG is a cable connecting plug for usage of PG terminations. It mates with plugs CA06COM and CA08COM.

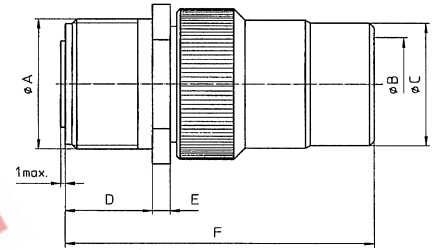

Part No. Pin Insert*	A	B	C	D	E	F	G
CA01COM-PG10SL-**-P*	Thread	Thread	max	+0,4	± 0,3	max	max
CA01COM-PG12S-**-P*	5/8-24UNEF-2A	PG9	18	14,2	2,8	52	21,8
CA01COM-PG12S-**-P*	3/4-20UNEF-2A	PG9	19	14,2	3,2	52	25,0
CA01COM-PG14S-**-P*	7/8-20UNEF-2A	PG11	22	14,2	3,2	52	28,2
CA01COM-PG16S-**-P*	1-20UNEF-2A	PG13,5	24	14,2	3,2	54	31,4
CA01COM-PG16-**-P*	1-20UNEF-2A	PG13,5	24	19,0	3,2	64	31,4
CA01COM-PG18-**-P*	1-1/8-18UNEF-2A	PG13,5	25	19,0	4,0	69	34,5
CA01COM-PG20-**-P*	1-1/4-18UNEF-2A	PG16	27	19,0	4,0	70	37,7
CA01COM-PG22-**-P*	1-3/8-18UNEF-2A	PG16	27	19,0	4,0	73	40,9
CA01COM-PG24-**-P*	1-1/2-18UNEF-2A	PG16	27	20,6	4,0	74	43,8
CA01COM-PG28-**-P*	1-3/4-18UNS-2A	PG21	32	20,6	4,0	74	50,4
CA01COM-PG32-**-P*	2-18UNS-2A	PG29	41	22,2	4,0	76	56,8
CA01COM-PG36-**-P*	2-1/4-16UN-2A	PG29	41	22,2	4,0	87	63,1


* For socket inserts substitute "S" for "P"

** Add contact arrangement number (see pages 6 – 8)





CA01COM-E is a cable connecting plug with endbell and cable clamp. It mates with plugs CA06COM-B and CA08COM-B.

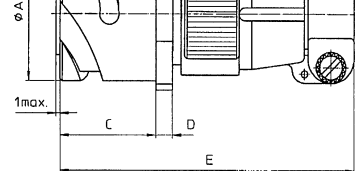


Part No.	A	B ¹⁾	C	D	E	F
Pin insert*	-0,15		+0,4	± 0,2	max	max
CA01COM-E10SL-**-P*-B	18,2	7,9	18,2	2,8	57	25,2
CA01COM-E12S-**-P*-B	21,4	7,9	18,2	3,2	57	27,8
CA01COM-E14S-**-P*-B	24,6	11,1	18,2	3,2	59	29,8
CA01COM-E16S-**-P*-B	27,4	14,2	18,2	3,2	60	32,3
CA01COM-E16-**-P*-B	27,4	14,2	21,5	3,2	68	32,3
CA01COM-E18-**-P*-B	30,8	15,8	23,05	4,0	72	34,8
CA01COM-E20-**-P*-B	34,2	19,0	23,05	4,0	72	37,8
CA01COM-E22-**-P*-B	37,4	19,0	23,05	4,0	72	41,1
CA01COM-E24-**-P*-B	40,9	23,7	23,05	4,0	78	44,4
CA01COM-E28-**-P*-B	46,7	23,7	24,05	4,0	79	50,9
CA01COM-E32-**-P*-B	53,4	31,8	24,05	4,0	78	57,1
CA01COM-E36-**-P*-B	59,6	34,6	24,05	4,0	78	63,6



CA01COM-E with threaded coupling

CA01COM-E is a cable connecting plug with endbell and cable clamp. It mates with plugs CA06COM and CA08COM.

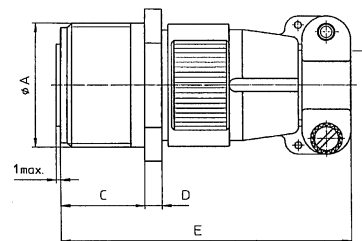

Part No.	A	B ¹⁾	C	D	E
Pin Insert*	Thread		+0,4	± 0,3	max
CA01COM-E10SL-**-P*	5/8-24UNEF-2A	7,9	14,2	2,8	53
CA01COM-E12S-**-P*	3/4-20UNEF-2A	7,9	14,2	3,2	53
CA01COM-E14S-**-P*	7/8-20UNEF-2A	11,1	14,2	3,2	55
CA01COM-E16S-**-P*	1-20UNEF-2A	14,2	14,2	3,2	56
CA01COM-E16-**-P*	1-20UNEF-2A	14,2	19,0	3,2	66
CA01COM-E18-**-P*	1-1/8-18UNEF-2A	15,8	19,0	4,0	68
CA01COM-E20-**-P*	1-1/4-18UNEF-2A	19,0	19,0	4,0	68
CA01COM-E22-**-P*	1-3/8-18UNEF-2A	19,0	19,0	4,0	68
CA01COM-E24-**-P*	1-1/2-18UNEF-2A	23,7	20,6	4,0	76
CA01COM-E28-**-P*	1-3/4-18UNS-2A	23,7	20,6	4,0	76
CA01COM-E32-**-P*	2-18UNS-2A	31,8	22,2	4,0	76
CA01COM-E36-**-P*	2-1/4-16UN-2A	34,6	22,2	4,0	76

* For socket inserts substitute "S" for "P"

** Add contact arrangement number (see pages 6 – 8)


¹⁾ max cable dia

Cannon  ITT Industries





CA01COM-E-DN is a cable connecting plug with endbell (wire sealing) for heat shrink boots. It mates with plugs CA06COM-B and CA08COM-B.

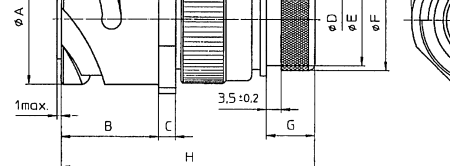


Part No.	A	B	C	D ¹⁾	E	F	G	H	I
Pin insert*	-0,15	+0,4	± 0,3		max	± 0,2	± 0,5	max	max
CA01COM-E10SL-**-P*-B-	18,2	18,2	2,8	7,7	13,3	15,5	11,7	53	25,2
CA01COM-E12S-**-P*-B-	21,4	18,2	3,2	7,9	13,3	15,5	11,7	53	27,8
CA01COM-E14S-**-P*-B-	24,6	18,2	3,2	10,6	17,0	19,1	11,7	53	29,8
CA01COM-E16S-**-P*-B-	27,4	18,2	3,2	13,5	21,9	23,9	11,7	53	32,3
CA01COM-E16-**-P*-B-	27,4	21,5	3,2	13,5	21,9	23,9	11,5	61	32,3
CA01COM-E18-**-P*-B-	30,8	23,05	4,0	14,6	21,9	23,9	11,5	62	34,8
CA01COM-E20-**-P*-B-	34,2	23,05	4,0	18,7	26,2	29,6	12,7	64	37,8
CA01COM-E22-**-P*-B-	37,4	23,05	4,0	20,8	26,2	29,6	12,7	64	41,1
CA01COM-E24-**-P*-B-	40,9	23,05	4,0	24,6	34,5	37,8	12,7	64	44,6
CA01COM-E28-**-P*-B-	46,7	24,05	4,0	27,0	34,5	37,8	12,7	66	50,9
CA01COM-E32-**-P*-B-	53,4	24,05	4,0	33,3	43,6	47,8	15,2	69	57,1
CA01COM-E36-**-P*-B-	59,6	24,05	4,0	38,5	43,6	47,8	15,2	70	63,6



CA01COM-E-DN with threaded coupling

CA01COM-E-DN is a cable connecting plug with endbell (wire sealing) for heat shrink boots. It mates with plugs CA06COM and CA08COM.

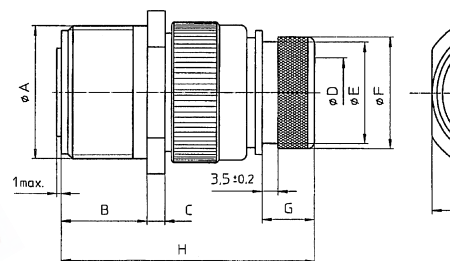

Part No.	A	B	C	D ¹⁾	E	F	G	H
Pin insert*	Thread	± 0,3	± 0,3	max	± 0,2	± 0,5	max	max
CA01COM-E10SL-**-P*-DN	5/8-24UNEF-2A	14,2	2,8	7,7	13,3	15,5	11,7	49
CA01COM-E12S-**-P*-DN	3/4-20UNEF-2A	14,2	3,2	7,9	13,3	15,5	11,7	49
CA01COM-E14S-**-P*-DN	7/8-20UNEF-2A	14,2	3,2	10,6	17,0	19,1	11,7	49
CA01COM-E16S-**-P*-DN	1-20UNEF-2A	14,1	3,2	13,5	21,9	23,9	11,7	49
CA01COM-E16-**-P*-DN	1-20UNEF-2A	19,0	3,2	13,5	21,9	23,9	11,5	58
CA01COM-E18-**-P*-DN	1-1/8-18UNEF-2A	19,0	4,0	14,6	21,9	23,9	11,5	58
CA01COM-E20-**-P*-DN	1-1/4-18UNEF-2A	19,0	4,0	18,7	26,2	29,6	12,7	60
CA01COM-E22-**-P*-DN	1-3/8-18UNEF-2A	19,0	4,0	20,8	26,2	29,6	12,7	60
CA01COM-E24-**-P*-DN	1-1/2-18UNEF-2A	20,6	4,0	24,6	34,5	37,8	12,7	63
CA01COM-E28-**-P*-DN	1-3/4-18UNS-2A	20,6	4,0	27,0	34,5	37,8	12,7	63
CA01COM-E32-**-P*-DN	2-18UNS-2A	22,2	4,0	33,3	43,6	47,8	15,2	67
CA01COM-E36-**-P*-DN	2-1/4-16UN-2A	22,2	4,0	38,5	43,6	47,8	15,2	68

* For socket inserts substitute "S" for "P"


** Add contact arrangement number (see pages 6 – 8)

¹⁾ max cable dia






CA01COM-F is a cable connecting plug for flex tube. It mates with plugs CA06COM-B and CA08COM-B.

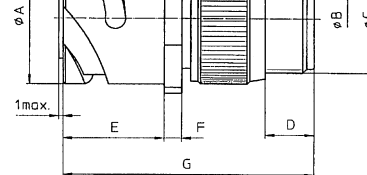


Part No. Pin Insert*	A	B ¹⁾	C	D	E	F	G
CA01COM-F10SL-**-P*-B	-0,15		Thread	min	+0,4	± 0,2	max
CA01COM-F12S-**-P*-B	18,2	8,2	5/8-24UNEF-2A	9,5	18,2	2,8	50
CA01COM-F14S-**-P*-B	18,2	8,2	5/8-24UNEF-2A	9,5	18,2	3,2	50
CA01COM-F16S-**-P*-B	24,6	11,1	3/4-20UNEF-2A	9,5	18,2	3,2	50
CA01COM-F16S-**-P*-B	27,4	14,3	7/8-20UNEF-2A	9,5	18,2	3,2	50
CA01COM-F16-**-P*-B	27,4	14,3	7/8-20UNEF-2A	9,5	21,5	3,2	57
CA01COM-F18-**-P*-B	30,8	16,7	1-20UNEF-2A	9,5	23,05	4,0	59
CA01COM-F20-**-P*-B	34,2	19,8	1-3/16-18UNEF-2A	9,5	32,05	4,0	59
CA01COM-F22-**-P*-B	37,4	19,8	1-3/16-18UNEF-2A	9,5	32,05	4,0	62
CA01COM-F24-**-P*-B	40,9	25,4	1-7/16-18UNEF	9,5	23,05	4,0	62
CA01COM-F28-**-P*-B	46,7	27,0	1-7/16-18UNEF	9,5	24,05	4,0	64
CA01COM-F32-**-P*-B	53,4	32,5	1-3/4-18UNS-2A	11,0	24,05	4,0	64
CA01COM-F36-**-P*-B	59,6	35,7	2-18UNS-2A	11,8	24,05	4,0	66



CA01COM-F with threaded coupling

CA01COM-F is a cable connecting plug for flex tube. It mates with plugs CA06COM and CA08COM.

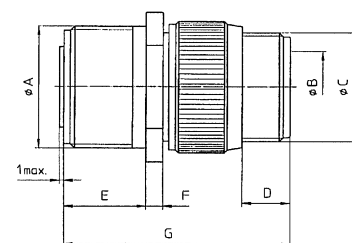

Part No. Pin Insert*	A	B ¹⁾	C	D	E	F	G
CA01COM-F10SL-**-P*	Thread		Thread	min	+0,4	± 0,3	max
CA01COM-F12S-**-P*	5/8-24UNEF-2A	8,2	5/8-24UNEF-2A	9,5	14,2	2,8	45
CA01COM-F12S-**-P*	3/4-20UNEF-2A	8,2	5/8-24UNEF-2A	9,5	14,2	3,2	45
CA01COM-F14S-**-P*	7/8-20UNEF-2A	11,1	3/4-20UNEF-2A	9,5	14,2	3,2	45
CA01COM-F16S-**-P*	1-20UNEF-2A	14,3	7/8-20UNEF-2A	9,5	14,2	3,2	45
CA01COM-F16-**-P*	1-20UNEF-2A	14,3	7/8-20UNEF-2A	9,5	14,2	3,2	54
CA01COM-F18-**-P*	1-1/8-18UNEF-2A	16,7	1-20UNEF-2A	9,5	19,0	4,0	54
CA01COM-F20-**-P*	1-1/4-18UNEF-2A	19,8	1-3/16-18UNEF-2A	9,5	19,0	4,0	55
CA01COM-F22-**-P*	1-3/8-18UNEF-2A	19,8	1-3/16-18UNEF-2A	9,5	20,6	4,0	58
CA01COM-F24-**-P*	1-1/2-18UNEF-2A	25,4	1-7/16-18UNEF-2A	9,5	20,6	4,0	59
CA01COM-F28-**-P*	1-3/4-18UNS-2A	27,0	1-7/16-18UNEF-2A	9,5	20,6	4,0	60
CA01COM-F32-**-P*	2-18UNS-2A	32,5	1-3/4-18UNS-2A	11,0	22,2	4,0	62
CA01COM-F36-**-P*	2-1/4-16UN-2A	35,7	2-18UNS-2A	11,8	22,2	4,0	64

* For socket inserts substitute "S" for "P"

** Add contact arrangement number (see pages 6 – 8)


¹⁾ max cable dia

Cannon  ITT Industries





CA02COM-E is a box mounting receptacle for front panel mounting. It mates with plugs CA06COM-B and CA08COM-B.




Part No.	A	B	C	D	E	F	G	H	X / Conta
Pin Insert*	-0,15	+0,4	± 0,2	± 0,3	max	± 0,1	± 0,3	H ₁₃	15
CA02COM-E10SL-**-P*-B	18,2	14,2	2,8	24,7	16,2	18,2	25,4	3,2	13,6
CA02COM-E12S-**-P*-B	21,4	14,2	3,2	24,7	16,2	20,6	28,0	3,2	13,2
CA02COM-E14S-**-P*-B	24,6	14,2	3,2	24,7	19,2	23,0	30,0	3,2	13,2
CA02COM-E16S-**-P*-B	27,4	14,2	3,2	24,7	22,4	24,6	32,5	3,2	13,2
CA02COM-E16-**-P*-B	27,4	19,0	3,2	33,8	22,4	24,6	32,5	3,2	17,9
CA02COM-E18-**-P*-B	30,8	19,0	4,0	33,8	25,6	27,0	35,0	3,2	17,1
CA02COM-E20-**-P*-B	34,2	19,0	4,0	33,8	29,0	29,4	38,0	3,2	17,1
CA02COM-E22-**-P*-B	37,4	19,0	4,0	33,8	32,2	31,8	41,0	3,2	17,1
CA02COM-E24-**-P*-B	40,9	20,6	4,0	33,8	35,3	34,9	44,5	3,7	15,5
CA02COM-E28-**-P*-B	46,7	20,6	4,0	33,8	41,4	39,7	50,8	3,7	15,5
CA02COM-E32-**-P*-B	53,4	22,2	4,0	33,8	47,8	44,5	57,0	4,3	13,9
CA02COM-E36-**-P*-B	59,6	22,2	4,0	33,8	52,6	49,2	63,5	4,3	13,9



CA02COM-E

with threaded coupling

CA02COM-E is a box mounting receptacle for front panel mounting. It mates with plugs CA06COM and CA08COM.




Part No.	A	B	C	D	E	F	G	H	X
Pin Insert*	Thread	+0,4	± 0,3	max	max	± 0,1	± 0,3	+0,2	15
CA02COM-E10SL-**-P*	5/8-24UNEF-2A	14,2	2,8	25,1	15,9	18,2	25,4	3,1	13
CA02COM-E12S-**-P*	3/4-20UNEF-2A	14,2	3,2	25,1	15,9	20,6	28,0	3,1	13
CA02COM-E14S-**-P*	7/8-20UNEF-2A	14,2	3,2	25,1	19,0	23,0	30,0	3,1	13
CA02COM-E16S-**-P*	1-20UNEF-2A	14,2	3,2	25,1	22,2	24,6	32,5	3,1	13
CA02COM-E16-**-P*	1-20UNEF-2A	19,0	3,2	34,2	22,2	24,6	32,5	3,1	17
CA02COM-E18-**-P*	1-1/8-18UNEF-2A	19,0	4,0	34,2	25,4	27,0	35,0	3,1	17
CA02COM-E20-**-P*	1-1/4-18UNEF-2A	19,0	4,0	34,2	29,0	29,4	38,0	3,1	17
CA02COM-E22-**-P*	1-3/8-18UNEF-2A	19,0	4,0	34,2	32,2	31,8	41,0	3,1	17
CA02COM-E24-**-P*	1-1/2-18UNEF-2A	20,6	4,0	34,2	35,3	34,9	44,5	3,7	15
CA02COM-E28-**-P*	1-3/4-18UNEF-2A	20,6	4,0	34,2	41,2	39,7	50,8	3,7	15
CA02COM-E32-**-P*	2-18UNS-2A	22,2	4,0	34,2	47,6	44,5	57,0	4,4	13
CA02COM-E36-**-P*	2-1/4-16UN-2A	22,2	4,0	34,2	52,4	49,2	63,5	4,4	13

* For socket inserts substitute "S" for "P"


** Add contact arrangement number (see pages 6 – 8)



CA20COM-E is a box mounting receptacle for rear panel mounting. It mates with plugs CA06COM-B and CA08COM-B.




Part No. Pin Insert*	A	B	C	D	E	F
CA20COM-E10SL-**-P*-B	-0,15	+0,4	± 0,2	± 0,3	max	± 0,1
CA20COM-E12S-**-P*-B	18,2	18,2	2,8	24,7	16,2	18,2
CA20COM-E14S-**-P*-B	21,4	18,2	3,2	24,7	16,2	20,6
CA20COM-E16S-**-P*-B	24,6	18,2	3,2	24,7	19,2	23,0
CA20COM-E16S-**-P*-B	27,4	18,2	3,2	24,7	22,4	24,6
CA20COM-E16-**-P*-B	27,4	21,5	3,2	33,8	22,4	24,6
CA20COM-E18-**-P*-B	30,8	23,05	4,0	33,8	25,6	27,0
CA20COM-E20-**-P*-B	34,2	23,05	4,0	33,8	29,0	29,4
CA20COM-E22-**-P*-B	37,4	23,05	4,0	33,8	32,2	31,8
CA20COM-E24-**-P*-B	40,9	23,05	4,0	33,8	35,3	34,9
CA20COM-E28-**-P*-B	46,7	24,05	4,0	33,8	41,4	39,7
CA20COM-E32-**-P*-B	53,4	24,05	4,0	33,8	47,8	44,5
CA20COM-E36-**-P*-B	59,6	24,05	4,0	33,8	54,1	49,2



CA20COM-E with threaded coupling

CA20COM-E is a box mounting receptacle for rear panel mounting. It mates with plugs CA06COM and CA08COM.



Part No. Pin insert*	A Thread	B +0,4	C ± 0,3	D max	E max	F ± 0,1	G ± 0,3
CA20COM-E10SL-**-P*	5/8-24UNEF-2A	18,2	2,8	25,1	14,5	18,2	25,4
CA20COM-E12S-**-P*	3/4-20UNEF-2A	18,2	3,2	25,1	16,1	20,6	28,0
CA20COM-E14S-**-P*	7/8-20UNEF-2A	18,2	3,2	25,1	19,2	23,0	30,0
CA20COM-E16S-**-P*	1-20UNEF-2A	18,2	3,2	25,1	22,4	24,6	32,5
CA20COM-E16-**-P*	1-20UNEF-2A	21,5	3,2	34,2	22,4	24,6	32,5
CA20COM-E18-**-P*	1-1/8-18UNEF-2A	23,05	4,0	34,2	25,6	27,0	35,0
CA20COM-E20-**-P*	1-1/4-18UNEF-2A	23,05	4,0	34,2	29,0	29,4	38,0
CA20COM-E22-**-P*	1-3/8-18UNEF-2A	23,05	4,0	34,2	32,2	31,8	41,0
CA20COM-E24-**-P*	1-1/2-18UNEF-2A	24,05	4,0	34,2	35,3	34,9	44,5
CA20COM-E28-**-P*	1-3/4-18UNEF-2A	24,05	4,0	34,2	41,4	39,7	50,8
CA20COM-E32-**-P*	2-18UNS-2A	24,05	4,0	34,2	47,8	44,5	57,0
CA20COM-E36-**-P*	2-1/4-16UN-2A	24,05	4,0	34,2	54,1	49,2	63,5

* For socket inserts substitute "S" for "P"


** Add contact arrangement number (see pages 6 – 8)

Cannon  ITT Industries





CA02COM-L is a box mounting receptacle for front panel mounting. It mates with plugs CA06COM-B and CA08COM-B.




Part No.	A	B	C	D	E	F
Pin Insert*	-0,15	+0,4	± 0,2	± 0,3	max	± 0,1
CA02COM-L10SL-**-P*-B	18,2	14,2	2,8	24,7	16,2	18,2
CA02COM-L12S-**-P*-B	21,4	14,2	3,2	24,7	16,2	20,6
CA02COM-L14S-**-P*-B	24,6	14,2	3,2	24,7	19,2	23,0
CA02COM-L16S-**-P*-B	27,4	14,2	3,2	24,7	22,4	24,6
CA02COM-L16-**-P*-B	27,4	19,0	3,2	33,8	22,4	24,6
CA02COM-L18-**-P*-B	30,8	19,0	4,0	33,8	25,6	27,0
CA02COM-L20-**-P*-B	34,2	19,0	4,0	33,8	29,0	29,4
CA02COM-L22-**-P*-B	37,4	19,0	4,0	33,8	32,2	31,8
CA02COM-L24-**-P*-B	40,9	20,6	4,0	33,8	35,3	34,9
CA02COM-L28-**-P*-B	46,7	20,6	4,0	33,8	41,4	39,7
CA02COM-L32-**-P*-B	53,4	22,2	4,0	33,8	47,8	44,5
CA02COM-L36-**-P*-B	59,6	22,2	4,0	33,8	52,6	49,2



CA02COM-L with threaded coupling

CA02COM-L is a box mounting receptacle for front panel mounting. It mates with plugs CA06COM and CA08COM.




Part No.	A	B	C	D	E	F	G
Pin Insert*	Thread	+0,4	± 0,3	max	max	± 0,1	± 0,3
CA02COM-L10SL-**-P*	5/8-24UNEF-2A	14,2	2,8	25,1	15,9	18,2	25,4
CA02COM-L12S-**-P*	3/4-20UNEF-2A	14,2	3,2	25,1	15,9	20,6	28,0
CA02COM-L14S-**-P*	7/8-20UNEF-2A	14,2	3,2	25,1	19,0	23,0	30,0
CA02COM-L16S-**-P*	1-20UNEF-2A	14,2	3,2	25,1	22,2	24,6	32,5
CA02COM-L16-**-P*	1-20UNEF-2A	19,0	3,2	34,2	22,2	24,6	32,5
CA02COM-L18-**-P*	1-1/8-18UNEF-2A	19,0	4,0	34,2	25,4	27,0	35,0
CA02COM-L20-**-P*	1-1/4-18UNEF-2A	19,0	4,0	34,2	29,0	29,4	38,0
CA02COM-L22-**-P*	1-3/8-18UNEF-2A	19,0	4,0	34,2	32,2	31,8	41,0
CA02COM-L24-**-P*	1-1/2-18UNEF-2A	20,6	4,0	34,2	35,3	34,9	44,5
CA02COM-L28-**-P*	1-3/4-18UNEF-2A	20,6	4,0	34,2	41,2	39,7	50,8
CA02COM-L32-**-P*	2-18UNS-2A	22,2	4,0	34,2	47,6	44,5	57,0
CA02COM-L36-**-P*	2-1/4-16UN-2A	22,2	4,0	34,2	52,4	49,2	63,5

* For socket inserts substitute "S" for "P"


** Add contact arrangement number (see pages 6 – 8)



CA20COM-L is a box mounting receptacle for rear panel mounting. It mates with plugs CA06COM-B and CA08COM-B.




Part No. Pin Insert*	A	B	C	D	E	F
CA20COM-L10SL-**-P*-B	-0,15	+0,4	± 0,2	± 0,3	max	± 0,1
CA20COM-L12S-**-P*-B	18,2	18,2	2,8	24,7	16,2	18,2
CA20COM-L14S-**-P*-B	21,4	18,2	3,2	24,7	16,2	20,6
CA20COM-L16S-**-P*-B	24,6	18,2	3,2	24,7	19,2	23,0
CA20COM-L16S-**-P*-B	27,4	18,2	3,2	24,7	22,4	24,6
CA20COM-L16-**-P*-B	27,4	21,5	3,2	33,8	22,4	24,6
CA20COM-L18-**-P*-B	30,8	23,05	4,0	33,8	25,6	27,0
CA20COM-L20-**-P*-B	34,2	23,05	4,0	33,8	29,0	29,4
CA20COM-L22-**-P*-B	37,4	23,05	4,0	33,8	32,2	31,8
CA20COM-L24-**-P*-B	40,9	23,05	4,0	33,8	35,3	34,9
CA20COM-L28-**-P*-B	46,7	24,05	4,0	33,8	41,4	39,7
CA20COM-L32-**-P*-B	53,4	24,05	4,0	33,8	47,8	44,5
CA20COM-L36-**-P*-B	59,6	24,05	4,0	33,8	54,1	49,2



CA20COM-L with threaded coupling

CA20COM-L is a box mounting receptacle for rear panel mounting. It mates with plugs CA06COM and CA08COM.



Part No. Pin insert*	A Thread	B +0,4	C ± 0,3	D max	E max	F ± 0,1	G ± 0,1
CA20COM-L10SL-**-P*	5/8-24UNEF-2A	18,2	2,8	25,1	14,5	18,2	25,4
CA20COM-L12S-**-P*	3/4-20UNEF-2A	18,2	3,2	25,1	16,1	20,6	28,0
CA20COM-L14S-**-P*	7/8-20UNEF-2A	18,2	3,2	25,1	19,2	23,0	30,0
CA20COM-L16S-**-P*	1-20UNEF-2A	18,2	3,2	25,1	22,4	24,6	32,5
CA20COM-L16-**-P*	1-20UNEF-2A	21,5	3,2	34,2	22,4	24,6	32,5
CA20COM-L18-**-P*	1-1/8-18UNEF-2A	23,05	4,0	34,2	25,6	27,0	35,0
CA20COM-L20-**-P*	1-1/4-18UNEF-2A	23,05	4,0	34,2	29,0	29,4	38,0
CA20COM-L22-**-P*	1-3/8-18UNEF-2A	23,05	4,0	34,2	32,2	31,8	41,0
CA20COM-L24-**-P*	1-1/2-18UNEF-2A	24,05	4,0	34,2	35,3	34,9	44,5
CA20COM-L28-**-P*	1-3/4-18UNEF-2A	24,05	4,0	34,2	41,4	39,7	50,8
CA20COM-L32-**-P*	2-18UNS-2A	24,05	4,0	34,2	47,8	44,5	57,0
CA20COM-L36-**-P*	2-1/4-16UN-2A	24,05	4,0	34,2	54,1	49,2	63,5

* For socket inserts substitute "S" for "P"


** Add contact arrangement number (see pages 6 – 8)

Cannon  ITT Industries






CA06COM-PG is a straight plug for usage of PG terminations. It mates with receptacles CA00COM-B, CA01COM-B and CA02COM-E-B.

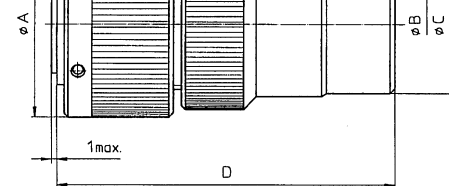


Part No.	A	B	C
Pin Insert*	max	Thread	max
CA06COM-PG10SL-**-P*-B	22,8	PG9	18
CA06COM-PG12S-**-P*-B	26,0	PG9	19
CA06COM-PG14S-**-P*-B	29,2	PG11	22
CA06COM-PG16S-**-P*-B	32,0	PG13,5	24
CA06COM-PG16-**-P*-B	32,0	PG13,5	24
CA06COM-PG18-**-P*-B	36,5	PG13,5	25
CA06COM-PG20-**-P*-B	39,9	PG16	27
CA06COM-PG22-**-P*-B	43,1	PG16	27
CA06COM-PG24-**-P*-B	46,6	PG16	27
CA06COM-PG28-**-P*-B	53,4	PG21	32
CA06COM-PG32-**-P*-B	60,1	PG29	41
CA06COM-PG36-**-P*-B	66,3	PG29	41



CA06COM-PG with threaded coupling

CA06COM-PG is a straight plug for usage of PG terminations. It mates with receptacles CA00COM, CA01COM and CA02COM-E.

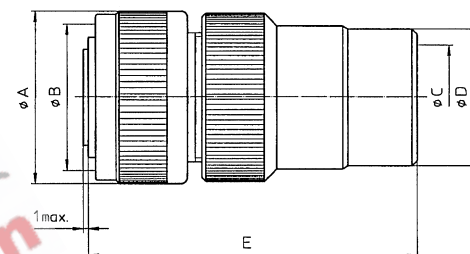

Part No.	A	B	C	D
Pin Insert*	max	Thread	Thread	max
CA06COM-PG10SL-**-P*	24,1	5/8-24UNEF-2B	PG9	18
CA06COM-PG12S-**-P*	25,8	3/4-20UNEF-2B	PG9	19
CA06COM-PG14S-**-P*	28,8	7/8-20UNEF-2B	PG11	22
CA06COM-PG16S-**-P*	31,8	1-20UNEF-2B	PG13,5	24
CA06COM-PG16-**-P*	31,8	1-20UNEF-2B	PG13,5	24
CA06COM-PG18-**-P*	34,1	1-1/8-18UNEF-2B	PG13,5	25
CA06COM-PG20-**-P*	37,4	1-1/4-18UNEF-2B	PG16	27
CA06COM-PG22-**-P*	40,5	1-3/8-18UNEF-2B	PG16	27
CA06COM-PG24-**-P*	43,8	1-1/2-18UNEF-2B	PG16	27
CA06COM-PG28-**-P*	50,2	1-3/4-18UNS-2B	PG21	32
CA06COM-PG32-**-P*	56,4	2-18UNS-2B	PG29	41
CA06COM-PG36-**-P*	62,8	2-1/4-16UN-2B	PG29	41


* For socket inserts substitute "S" for "P"

** Add contact arrangement number (see pages 6 – 8)





CA06COM-E is a straight plug with endbell and cable clamp. It mates with receptacles CA00COM-B, CA01COM-B and CA02COM-E-B.

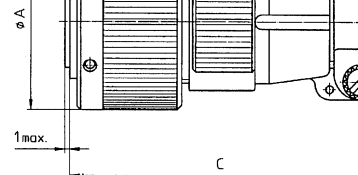


Part No. Pin Insert*	A max	B ¹⁾
CA06COM-E10SL-**-P*-B	22,8	7,9
CA06COM-E12S-**-P*-B	26,0	7,9
CA06COM-E14S-**-P*-B	29,2	11,1
CA06COM-E16S-**-P*-B	32,0	14,2
CA06COM-E16-**-P*-B	32,0	14,2
CA06COM-E18-**-P*-B	36,5	15,8
CA06COM-E20-**-P*-B	39,9	19,0
CA06COM-E22-**-P*-B	43,1	19,0
CA06COM-E24-**-P*-B	46,6	23,7
CA06COM-E28-**-P*-B	53,4	23,7
CA06COM-E32-**-P*-B	60,1	31,8
CA06COM-E36-**-P*-B	66,3	34,6



CA06COM-E with threaded coupling

CA06COM-E is a straight plug with endbell and cable clamp. It mates with receptacles CA00COM, CA01COM and CA02COM-E.

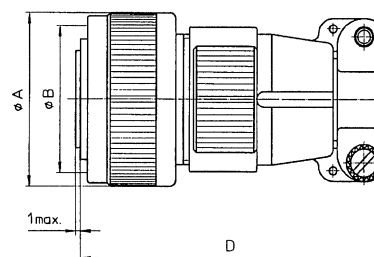

Part No. Pin insert*	A max	B Thread	C ¹⁾
CA06COM-E10SL-**-P*	24,1	5/8-24UNEF-2B	7,9
CA06COM-E12S-**-P*	25,8	3/4-20UNEF-2B	7,9
CA06COM-E14S-**-P*	28,8	7/8-20UNEF-2B	11,1
CA06COM-E16S-**-P*	31,8	1-20UNEF-2B	14,2
CA06COM-E16-**-P*	31,8	1-20UNEF-2B	14,2
CA06COM-E18-**-P*	34,1	1-1/8-18UNEF-2B	15,8
CA06COM-E20-**-P*	37,4	1-1/4-18UNEF-2B	19,0
CA06COM-E22-**-P*	40,5	1-3/8-18UNEF-2B	19,0
CA06COM-E24-**-P*	43,8	1-1/2-18UNEF-2B	23,7
CA06COM-E28-**-P*	50,2	1-3/4-18UNS-2B	23,7
CA06COM-E32-**-P*	56,4	2-18UNS-2B	31,8
CA06COM-E36-**-P*	62,8	2-1/4-16UN-2B	34,6

* For socket inserts substitute "S" for "P"

** Add contact arrangement number (see pages 6 – 8)


¹⁾ max cable dia

Cannon  ITT Industries





CA06COM-F is a straight plug with endbell for flex tubes. It mates with receptacles **CA00COM-B**, **CA01COM-B** and **CA02COM-E-B**.




Part No. Pin Insert*	A max	B ¹⁾	C Thread	D min
CA06COM-F10SL-**-P*-B	22,8	8,2	5/8-24UNEF-2A	9,5
CA06COM-F12S-**-P*-B	26,0	8,2	5/8-24UNEF-2A	9,5
CA06COM-F14S-**-P*-B	29,2	11,1	3/4-20UNEF-2A	9,5
CA06COM-F16S-**-P*-B	32,0	14,3	7/8-20UNEF-2A	9,5
CA06COM-F16-**-P*-B	32,0	14,3	7/8-20UNEF-2A	9,5
CA06COM-F18-**-P*-B	36,5	16,7	1-20UNEF-2A	9,5
CA06COM-F20-**-P*-B	39,9	19,8	1-3/16-18UNEF-2A	9,5
CA06COM-F22-**-P*-B	43,1	19,8	1-3/16-18UNEF-2A	9,5
CA06COM-F24-**-P*-B	46,6	25,4	1-7/16-18UNEF-2A	9,5
CA06COM-F28-**-P*-B	53,4	27,0	1-7/16-18UNEF-2A	9,5
CA06COM-F32-**-P*-B	60,1	32,5	1-3/4-18UNS-2A	11,0
CA06COM-F36-**-P*-B	66,3	35,7	2-18UNS-2A	11,8



CA06COM-F with threaded coupling

CA06COM-F is a straight plug with endbell for flex tubes. It mates with receptacles **CA00COM**, **CA01COM** and **CA02COM-E**.

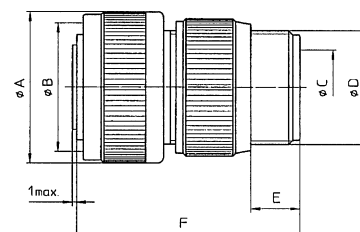

Part No. Pin Insert*	A max	B Thread	C ¹⁾	D Thread	E min
CA06COM-F10SL-**-P*	24,1	5/8-24UNEF-2B	8,2	5/8-24UNEF-2A	9,5
CA06COM-F12S-**-P*	25,8	3/4-20UNEF-2B	8,2	5/8-24UNEF-2A	9,5
CA06COM-F14S-**-P*	28,8	7/8-20UNEF-2B	11,1	3/4-20UNEF-2A	9,5
CA06COM-F16S-**-P*	31,8	1-20UNEF-2B	14,3	7/8-20UNEF	9,5
CA06COM-F16-**-P*	31,8	1-20UNEF-2B	14,3	7/8-20UNEF	9,5
CA06COM-F18-**-P*	34,1	1-1/8-18UNEF-2B	16,7	1-20UNEF-2A	9,5
CA06COM-F20-**-P*	37,4	1-1/4-18UNEF-2B	19,8	1-3/16-18UNEF-2A	9,5
CA06COM-F22-**-P*	40,5	1-3/8-18UNEF-2B	19,8	1-3/16-18UNEF-2A	9,5
CA06COM-F24-**-P*	43,8	1-1/2-18UNEF-2B	25,4	1-7/16-18UNEF-2A	9,5
CA06COM-F28-**-P*	50,2	1-3/4-18UNS-2B	27,0	1-7/16-18UNEF-2A	9,5
CA06COM-F32-**-P*	56,4	2-18UNS-2B	32,5	1-3/4-18UNS-2A	11,0
CA06COM-F36-**-P*	62,8	2-1/4-16UN-2B	35,7	2-18UNS-2A	11,8

* For socket inserts substitute "S" for "P"


** Add contact arrangement number (see pages 6 – 8)

¹⁾ max cable dia





CA06COM-E-B/-05/-06 is a straight plug with endbell (wire sealing) for heat shrink boots. It mates with receptacles **CA00COM-B**, **CA01COM-B** and **CA02COM-E-B**.




Part No. Pin Insert*	A max	B ¹⁾	C max	D ± 0,2	E ± 0,2
CA06COM-E10SL-**-P*-B-	22,8	7,7	13,3	15,5	11,7
CA06COM-E12S-**-P*-B-	26,0	7,9	13,3	15,5	11,7
CA06COM-E14S-**-P*-B-	29,2	10,6	17,0	19,1	11,7
CA06COM-E16S-**-P*-B-	32,0	13,5	21,9	23,9	11,7
CA06COM-E16-**-P*-B-	32,0	13,5	21,9	23,9	11,7
CA06COM-E18-**-P*-B-	36,5	14,6	21,9	23,9	11,7
CA06COM-E20-**-P*-B-	39,9	18,7	26,2	29,6	12,7
CA06COM-E22-**-P*-B-	43,1	20,8	26,2	29,6	12,7
CA06COM-E24-**-P*-B-	46,6	24,6	34,5	37,8	12,7
CA06COM-E28-**-P*-B-	53,4	27,0	34,5	37,8	12,7
CA06COM-E32-**-P*-B-	60,1	33,3	43,6	47,8	15,2
CA06COM-E36-**-P*-B-	66,3	38,5	43,6	47,8	15,2



CA06COM-E-DN with threaded coupling

CA06COM-E-DN is a straight plug with endbell (wire sealing) for heat shrink boots. It mates with receptacles **CA00COM**, **CA01COM** and **CA02COM-E**.



Part No. Pin Insert*	A max	B Thread	C ¹⁾	D max	E ± 0,2
CA06COM-E10SL-**-P*-DN	24,1	5/8-24UNEF-2B	7,7	13,3	15,5
CA06COM-E12S-**-P*-DN	25,8	3/4-20UNEF-2B	7,9	13,3	15,5
CA06COM-E14S-**-P*-DN	28,8	7/8-20UNEF-2B	10,6	17,0	19,1
CA06COM-E16S-**-P*-DN	31,8	1-20UNEF-2B	13,5	21,9	23,9
CA06COM-E16-**-P*-DN	31,8	1-20UNEF-2B	13,5	21,9	23,9
CA06COM-E18-**-P*-DN	34,1	1-1/8-18UNEF-2B	14,6	21,9	23,9
CA06COM-E20-**-P*-DN	37,4	1-1/4-18UNEF-2B	18,7	26,2	29,6
CA06COM-E22-**-P*-DN	40,5	1-3/8-18UNEF-2B	20,8	26,2	29,6
CA06COM-E24-**-P*-DN	43,8	1-1/2-18UNEF-2B	24,6	34,5	37,8
CA06COM-E28-**-P*-DN	50,2	1-3/4-18UNS-2B	27,0	34,5	37,8
CA06COM-E32-**-P*-DN	56,4	2-18UNS-2B	33,3	43,6	47,8
CA06COM-E36-**-P*-DN	62,8	2-1/4-16UN-2B	38,5	43,6	47,8

* For socket inserts substitute "S" for "P"

** Add contact arrangement number (see pages 6 – 8)

¹⁾ max cable dia

Cannon  ITT Industries





CA06COM-IN is a straight plug with universal endbell. It mates with receptacles CA00COM-B, CA01COM-B and CA02COM-E-B.




Part No. Pin Insert*	A	B max	E max	D Cable sealing an
CA06COM-IN10SL-**-P*-B	24,1	84	18	D07 = 4,5 – 7,2
CA06COM-IN14S-**-P*-B	28,8	85	18	D07 = 4,5 – 7,2
CA06COM-IN20-**-P*-B	37,4	92	24	D11 = 7,0 – 11,1
CA06COM-IN22-**-P*-B	40,5	96	34	D17 = 14,5 – 17,8



CA06COM-IN with threaded coupling

CA06COM-IN is a straight plug with universal endbell. It mates with receptacles CA00COM, CA01COM and CA02COM-E.

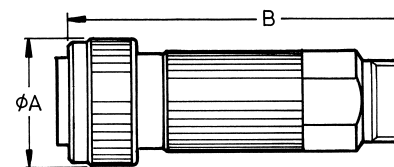

Part No. Pin Insert*	A	B max	E max	D Cable sealing an
CA06COM-IN10SL-**-P*	24,1	84	18	D07 = 4,5 – 7,2
CA06COM-IN14S-**-p*	28,8	85	18	D07 = 4,5 – 7,2
CA06COM-IN20-**-p*	37,4	92	24	D11 = 7,0 – 11,1
CA06COM-IN22-**-p*	40,5	96	34	D17 = 14,5 – 17,8


* For socket inserts substitute "S" for "P"

** Add contact arrangement number (see pages 6 – 8)





CA08COM-E-B is a 90° plug with cable clamp. It mates with receptacles CA00COM-B, CA01COM-B and CA02COM-E-B.




Part No. Pin Insert*	A max	B ¹⁾	C max	D max
CA08COM-E10SL-**-P*-B	22,8	7,9	22,7	42
CA08COM-E12S-**-P*-B	26,0	7,9	22,7	42
CA08COM-E14S-**-P*-B	29,2	11,1	27,5	42
CA08COM-E16S-**-P*-B	32,0	14,2	30,0	45
CA08COM-E16-**-P*-B	32,0	14,2	30,0	45
CA08COM-E18-**-P*-B	36,5	15,8	33,0	53
CA08COM-E20-**-P*-B	39,9	19,0	37,5	53
CA08COM-E22-**-P*-B	43,1	19,0	37,5	53
CA08COM-E24-**-P*-B	46,6	23,7	43,3	58
CA08COM-E28-**-P*-B	53,4	23,7	43,3	58
CA08COM-E32-**-P*-B	60,1	31,8	51,7	66
CA08COM-E36-**-P*-B	66,3	34,6	58,0	69



CA08COM-E with threaded coupling

CA08COM-E is a 90° plug with cable clamp. It mates with receptacles CA00COM, CA01COM and CA02COM-E.



Part No. Pin Insert*	A max	B Thread	C ¹⁾	D max
CA08COM-E10SL-**-P*	24,1	5/8-24UNEF-2B	7,9	22,7
CA08COM-E12S-**-P*	25,8	3/4-20UNEF-2B	7,9	22,7
CA08COM-E14S-**-P*	28,8	7/8-20UNEF-2B	11,1	27,5
CA08COM-E16S-**-P*	31,8	1-20UNEF	14,2	30,0
CA08COM-E16-**-P*	31,8	1-20UNEF	14,2	30,0
CA08COM-E18-**-P*	34,1	1-1/8-18UNEF-2B	15,8	32,2
CA08COM-E20-**-P*	37,4	1-1/4-18UNEF-2B	19,0	37,5
CA08COM-E22-**-P*	40,5	1-3/8-18UNEF-2B	19,0	37,5
CA08COM-E24-**-P*	43,8	1-1/2-18UNEF-2B	23,7	43,3
CA08COM-E28-**-P*	50,2	1-3/4-18UNS-2B	23,7	43,3
CA08COM-E32-**-P*	56,4	2-18UNS-2B	31,8	51,7
CA08COM-E36-**-P*	62,8	2-1/4-16UN-2B	34,6	58,0


- * For socket inserts substitute "S" for "P"
 ** Add contact arrangement number (see pages 6 – 8)
¹⁾ max cable dia

Cannon  ITT Industries





CA08COM-F-B is a 90° plug for flex tubes. It mates with receptacles CA00COM-B, CA01COM-B and CA02COM-E-B.




Part No.	A	B	C	D
Pin Insert*	max	Thread	max	max
CA08COM-F10SL-**-P*-B	22,8	5/8-24UNEF-2A	45	22,0
CA08COM-F12S-**-P*-B	26,0	5/8-24UNEF-2A	45	22,0
CA08COM-F14S-**-P*-B	29,2	3/4-20UNEF-2A	47	24,0
CA08COM-F16S-**-P*-B	32,0	7/8-20UNEF-2A	48	25,0
CA08COM-F16-**-P*-B	32,0	7/8-20UNEF-2A	57	25,0
CA08COM-F18-**-P*-B	36,5	1-20UNEF-2A	58	27,0
CA08COM-F20-**-P*-B	39,9	1-3/16-18UNEF-2A	61	29,0
CA08COM-F22-**-P*-B	43,1	1-3/16-18UNEF-2A	61	30,0
CA08COM-F24-**-P*-B	46,6	1-7/16-18UNEF-2A	66	32,0
CA08COM-F28-**-P*-B	53,4	1-7/16-18UNEF-2A	66	34,0
CA08COM-F32-**-P*-B	60,1	1-3/4-18UNS-2A	72	39,5
CA08COM-F36-**-P*-B	66,3	2-18UNS-2A	75	45,0



CA08COM-F with threaded coupling

CA08COM-F is a 90° plug for flex tubes. It mates with receptacles CA00COM, CA01COM and CA02COM-E.

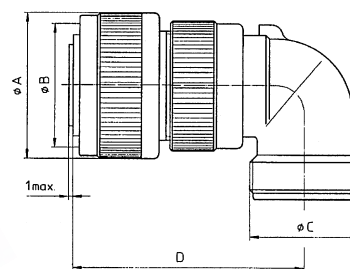

Part No.	A	B	C	D	E
Pin Insert*	max	Thread	Thread	max	max
CA08COM-F10SL-**-P*	24,1	5/8-24UNEF-2B	5/8-24UNEF-2A	45	22,0
CA08COM-F12SL-**-P*	25,8	3/4-20UNEF-2B	5/8-24UNEF-2A	45	22,0
CA08COM-F14S-**-P*	28,8	7/8-20UNEF-2B	3/4-20UNEF-2A	47	24,0
CA08COM-F16S-**-P*	31,8	1-20UNEF-2B	7/8-20UNEF-2A	48	25,0
CA08COM-F16-**-P*	31,8	1-20UNEF-2B	7/8-20UNEF-2A	57	25,0
CA08COM-F18-**-P*	34,1	1-1/8-18UNEF-2B	1-20UNEF-2A	58	27,0
CA08COM-F20-**-P*	37,4	1-1/4-18UNEF-2B	1-3/16-18UNEF-2A	61	29,0
CA08COM-F22-**-P*	40,5	1-3/8-18UNEF-2B	1-3/16-18UNEF-2A	61	30,0
CA08COM-F24-**-P*	43,8	1-1/2-18UNEF-2B	1-7/16-18UNEF-2A	66	32,0
CA08COM-F28-**-P*	50,2	1-3/4-18UNS-2B	1-7/16-18UNEF-2A	66	34,0
CA08COM-F32-**-P*	56,4	2-18UNS-2B	1-3/4-18UNS-2A	72	39,5
CA08COM-F36-**-P*	62,8	2-1/4-16UN-2B	2-18UNS-2A	75	45,0


* For socket inserts substitute "S" for "P"

** Add contact arrangement number (see pages 6 – 8)





CA08COM-PG-B designates a 90° plug for usage of PG terminations. It mates with receptacles CA01COM-B and CA02COM-B.

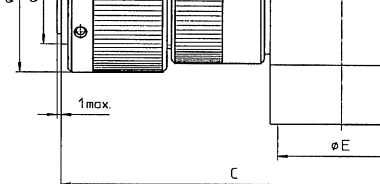


Part No. Pin insert*	A max	B -0,3	C max	D
CA08COM-PG10SL-**P*-B	22,8	11,3	57	18,5
CA08COM-PG12S-**P*-B	26,0	14,0	57	18,5
CA08COM-PG14S-**P*-B	29,2	17,1	59	19,5
CA08COM-PG16S-**P*-B	32,0	20,4	63	22,0
CA08COM-PG16-**P*-B	32,0	20,4	72	22,0
CA08COM-PG18-**P*-B	36,5	23,6	77	26,3
CA08COM-PG20-**P*-B	39,9	26,7	82	29,0
CA08COM-PG22-**P*-B	43,1	29,8	82	29,5



CA08COM-PG with threaded coupling

CA08COM-PG designates a 90° plug for usage of PG terminations. It mates with receptacles CA01COM and CA02COM.

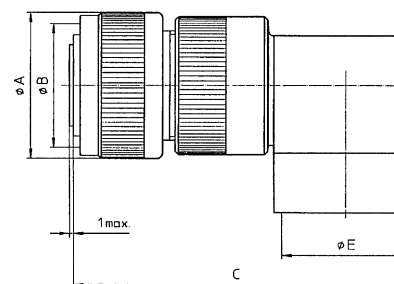

Part No. Pin insert*	A max	B Thread	C max	D
CA08COM-PG10SL-**P*	24,1	5/8-24UNEF-2B	57	18,5
CA08COM-PG12S-**P*	25,8	3/4-20UNEF-2B	57	18,5
CA08COM-PG14S-**P*	28,8	7/8-20UNEF-2B	59	19,5
CA08COM-PG16S-**P*	31,8	1-20UNEF-2B	63	22,0
CA08COM-PG16-**P*	31,8	1-20UNEF-2B	72	22,0
CA08COM-PG18-**P*	34,1	1-1/8-18UNEF-2B	77	26,3
CA08COM-PG20-**P*	37,4	1-1/4-18UNEF-2B	82	29,0
CA08COM-PG22-**P*	40,5	1-3/8-18UNEF-2B	82	29,5

* For socket inserts substitute "S" for "P"


** Add contact arrangement number (see pages 6 – 8)

Cannon  ITT Industries





CA08COM-IN-B is a 90° plug with universal endbell. It mates with receptacles CA00COM-B, CA01COM-B and CA02COM-E-B.




Part No. Pin Insert*	A	B max	C max	D Cable sealing ar
CA08COM-IN10SL-**P*-B-***-D07	24,1	52	78	D07 = 4,5 – 7,2
CA08COM-IN20-**P*-B-***-D11	37,4	62	86	D11 = 7,0 – 11,0



CA08COM-IN with threaded coupling

CA08COM-IN is a 90° plug with universal endbell. It mates with receptacles CA00COM, CA01COM and CA02COM-E.




Part No. Pin Insert*	A	B max	C max	D Cable sealing ar
CA08COM-IN10SL-**P*-***-D07	24,1	52	78	D07 = 4,5 – 7,2
CA08COM-IN20-**P*-***-D11	37,4	62	86	D11 = 7,0 – 11,0

- * For socket inserts substitute "S" for "P"
 ** Add contact arrangement number (see pages 6 – 8)
 *** 01 Crimp contact






coupling
CA00COM-B, CA02COM-E-B and
CA20COM-E-B

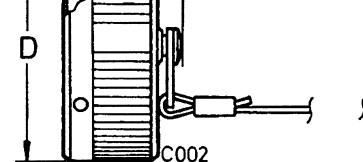


Part No.	Shell size	B ± 0,3	D max	L ± 0,25
CA120003-1701	10 SL	19,5	22,4	107
CA120003-1702	12S	19,5	25,6	107
CA120003-1703	14S	19,5	28,8	107
CA121003-1704	16S	19,5	31,6	107
CA121003-1705	16	24,5	31,6	120
CA121003-1706	18	24,5	35,7	120
CA121003-1707	20	24,5	39,1	134
CA121003-1708	22	24,5	42,3	134
CA121003-1709	24	24,5	45,8	134
CA121003-1710	28	24,5	51,6	176
CA121003-1711	32	24,5	58,3	176
CA121003-1712	36	24,5	64,5	176



Protective caps

for receptacles with threaded
coupling
CA00COM, CA02COM-E and
CA20COM

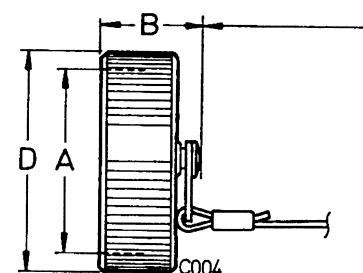


Part No.	Shell size	A Thread	B max	D max	L max
CA121003-1601	10SL	5/8-24UNEF-2B	16,0	20,2	114
CA121003-1602	12S	3/4-20UNEF-2B	16,0	23,4	127
CA121003-1603	14S	7/8-20UNEF-2B	16,0	26,6	127
CA121003-1604	16S, 16	1-20UNEF-2B	16,0	29,8	127
CA121003-1606	18	1-1/8-18UNEF-2B	16,0	32,9	127
CA121003-1607	20	1-1/4-18UNEF-2B	16,0	36,1	141
CA121003-1608	22	1-3/8-18UNEF-2B	16,0	39,4	141
CA121003-1609	24	1-1/2-18UNEF-2B	16,0	42,6	154
CA121003-1610	28	1-3/4-18UNEF-2B	18,0	48,9	214
CA121003-1611	32	2-18UNS-2B	18,0	55,3	214
CA121003-1612	36	2-1/4-16UN-2B	18,0	61,6	214

Cannon  ITT Industries






CA06COM-B and CA08COM-B

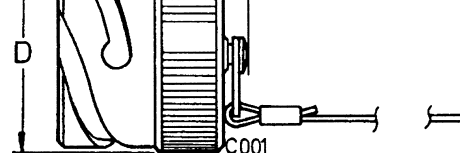


Part No.	Shell size	B max	D max	L ca
CA121004-1701	10 SL	29,0	20,7	107
CA121004-1702	12S	29,0	23,9	120
CA121004-1703	14S	29,0	27,1	120
CA121004-1704	16S	29,0	29,9	120
CA121004-1705	16	37,0	29,9	134
CA121004-1706	18	37,0	33,3	134
CA121004-1707	20	37,0	36,7	147
CA121004-1708	22	37,0	39,9	147
CA121004-1709	24	37,0	43,4	147
CA121004-1710	28	37,0	49,2	204
CA121004-1711	32	37,0	55,9	204
CA121004-1712	36	37,0	62,1	204




Protective caps

for plugs with threaded coupling
CA06COM and CA08COM

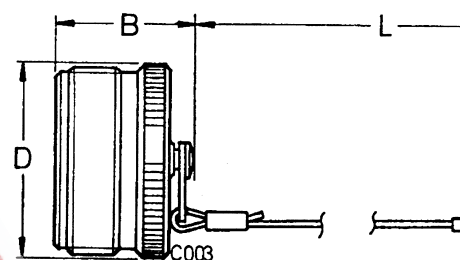

Part No.	Shell size	A Thread	B max	D max	L max
CA121004-1601	10SL	5/8-24UNEF-2A	20,5	16,7	114
CA121004-1602	12S	3/4-20UNEF-2A	25,0	19,8	127
CA121004-1603	14S	7/8-20UNEF-2A	25,0	23,0	127
CA121004-1604	16S, 16	1-20UNEF-2A	25,0	26,2	127
CA121004-1606	18	1-1/8-18UNEF-2A	25,0	29,4	127
CA121004-1607	20	1-1/4-18UNEF-2A	25,0	32,5	141
CA121004-1608	22	1-3/8-18UNEF-2A	25,0	35,7	141
CA121004-1609	24	1-1/2-18UNEF-2A	25,0	38,9	154
CA121004-1610	28	1-3/4-18UNEF-2A	25,0	45,2	214
CA121004-1611	32	2-18UNS-2A	25,0	51,6	214
CA121004-1612	36	2-1/4-16UN-2A	25,0	57,9	214






Part No.	Shell size	A Thread	B max	E max	L max	R max
CA121051-325	10SL, 12S	5/8-24UNEF-2B	10,5	7,9	20,8	22,0
CA121051-326	14S	3/4-20UNEF-2B	10,6	11,1	22,4	27,4
CA121051-327	16S, 16	7/8-20UNEF-2B	10,5	14,2	24,0	29,8
CA121051-328	18	1-20UNEF-2B	10,5	15,8	24,0	32,2
CA121051-329	20, 22	1-3/16-18UNEF-2B	10,5	19,0	24,0	37,4
CA121051-330	24, 28	1-7/16-18UNEF-2B	10,5	23,7	26,4	43,9
CA121051-331	32	1-3/4-18UNS-2B	12,0	31,8	28,0	51,7
CA121051-332	36	2-18UNS-2B	13,7	34,6	29,6	57,8



Telescoping bushing

The telescoping bushing is used together with above cable clamps CA121051-... It keeps oil, dirt or dust out of the endbell. Wrapping or insulating of the wires fed through the clamp is eliminated since they are protected by the bushing. Combinations of bushings may be used to reduce cable entry diameters for improved sealing.

Material: Polychloroprene



Part No.	Shell size	C max	L max	R -0,3
012-8552-000	10SL, 12S	10,0	70,4	6,7
012-8554-000	14S	12,8	67,4	9,2
012-0218-000	16S, 16	18,9	63,9	11,2
012-0219-000	18	22,1	60,6	14,4
012-0220-000	20, 22	27,0	57,4	16,0
012-8555-000	24, 28	27,0	57,4	16,7
012-8556-000	24, 28	33,5	54,4	21,6
012-8557-000	32	33,5	54,4	21,6
012-8558-000	32	40,5	51,4	26,9
012-8558-000	36	40,5	51,4	26,9
012-0223-000	36	47,0	48,4	31,9





Rear panel mounting


Part No.	Shell size	A $\pm 0,1$	B $+0,2$	C $\pm 0,3$
075-8501-000	10SL	18,2	18,2	25,4
075-8502-000	12S	20,6	21,4	28,0
075-8503-000	14S	23,0	24,6	30,0
075-8504-000	16S, 16	24,6	27,4	32,5
075-8505-000	18	27,0	30,8	35,0
075-8506-000	20	29,4	34,2	38,0
075-8507-000	22	31,8	37,4	41,0
075-8508-000	24	34,9	40,8	44,5
075-8509-000	28	39,7	46,7	50,8
075-8510-000	32	44,5	53,4	57,0
075-8511-000	36	49,2	59,6	63,5

Front panel mounting

Part No.	Shell size	A $\pm 0,1$	B $+0,2$	C $\pm 0,3$
075-8512-000	10SL	15,7	18,2	25,4
075-8513-000	12S	20,6	18,9	28,0
075-8514-000	14S	23,0	22,1	30,0
075-8515-000	16S, 16	24,6	25,3	32,5
075-8516-000	18	27,0	28,4	35,0
075-8517-000	20	29,4	31,6	38,0
075-8518-000	22	31,8	34,8	41,0
075-8519-000	24	34,9	38,0	44,5
075-8520-000	28	39,7	44,3	50,8
075-8521-000	32	44,5	50,7	57,0
075-8522-000	36	49,2	57,0	63,5

Socket contacts

Contact size	Termination size mm ²	Part number with finish A36	d1	d2 +0,05	d3	d5	d6
15S	0,75 - 1,5	031-8555-110	3,2 ^{-0,15}	1,65	1,75 ^{-0,1}	1,75 ^{+0,08}	2,75 ^{-0,08}
	0,3 - 0,6	031-8688-110	3,2 ^{-0,15}	1,65	1,75 ^{-0,1}	1,2 ^{+0,1}	2,75 ^{-0,08}
	0,14 - 0,38	031-8555-130	3,2 ^{-0,15}	1,65	1,75 ^{-0,1}	0,9 ^{+0,05}	2,75 ^{-0,08}
15	0,75 - 1,5	031-8556-110	3,2 ^{-0,15}	1,65	1,75 ^{-0,1}	1,75 ^{+0,08}	2,75 ^{-0,08}
	0,3 - 0,6	031-8639-120	3,2 ^{-0,15}	1,65	1,75 ^{-0,1}	1,2 ^{+0,1}	2,75 ^{-0,08}
	0,14 - 0,38	031-8556-130	3,2 ^{-0,15}	1,65	1,75 ^{-0,1}	0,9 ^{+0,05}	2,75 ^{-0,08}
25	2,0 - 3,0	031-8557-000	4,8 ^{-0,1}	2,45	3,3 ^{-0,1}	2,5 ^{+0,1}	3,8 ^{-0,1}
	0,75 - 1,5	031-8557-020	4,8 ^{-0,1}	2,45	3,3 ^{-0,1}	1,75 ^{+0,08}	3,8 ^{-0,1}
	4,0	031-8557-010	4,8 ^{-0,1}	2,45	3,3 ^{-0,1}	2,8 ^{+0,1}	3,8 ^{-0,1}
	0,3 - 0,6	031-8557-040	4,8 ^{-0,1}	2,45	3,3 ^{-0,1}	1,2 ^{+0,1}	3,8 ^{-0,1}
100	6,0	031-8558-000	6,5 ^{-0,2}	3,65	6,25 ^{-0,2}	3,5 ^{+0,1}	6,8 ^{-0,1}
	10,0	031-8559-000	6,5 ^{-0,2}	3,65	6,25 ^{-0,2}	4,8 ^{+0,1}	6,8 ^{-0,1}
	2,0 - 3,0	031-8519-010	6,5 ^{-0,2}	3,65	6,25 ^{-0,2}	2,5 ^{+0,05}	6,8 ^{-0,1}
	4,0	031-8519-000	6,5 ^{-0,2}	3,65	6,25 ^{-0,2}	4,55 ^{+0,1}	6,8 ^{-0,1}

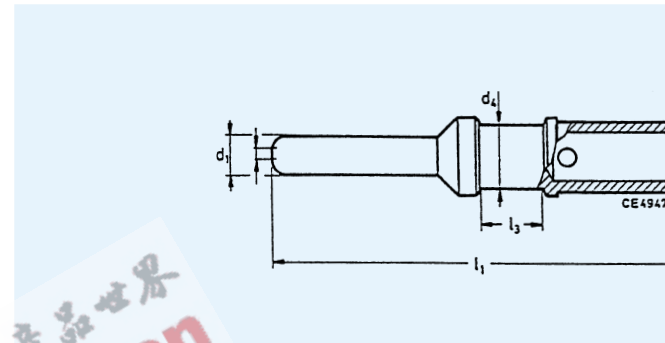

Pin Contacts

Contact size	Termination size mm ²	Part number with finish A36	d1 -0,05	d4	d6	d7
15S	0,75 - 1,5	030-8586-000	1,6	1,75 ^{-0,1}	1,75 ^{+0,08}	2,75 ^{-0,08}
	0,3 - 0,6	330-8744-000	1,6	1,75 ^{-0,1}	1,2 ^{+0,1}	2,75 ^{-0,08}
	0,14 - 0,38	030-8586-010	1,6	1,75 ^{-0,1}	0,9 ^{+0,05}	2,75 ^{-0,08}
15	0,75 - 1,5	030-8587-000	1,6	1,75 ^{-0,1}	1,75 ^{+0,08}	2,75 ^{-0,08}
	0,3 - 0,6	330-8659-000	1,6	1,75 ^{-0,1}	1,2 ^{+0,1}	2,75 ^{-0,08}
	0,14 - 0,38	030-8587-030	1,6	1,75 ^{-0,1}	0,9 ^{+0,05}	2,75 ^{-0,08}
25	2,0 - 3,0	030-8588-000	2,4	3,3 ^{-0,15}	2,5 ^{+0,1}	3,8 ^{-0,1}
	0,75 - 1,5	030-8588-010	2,4	3,3 ^{-0,15}	1,75 ^{+0,08}	3,8 ^{-0,1}
	4,0	030-8588-054	2,4	3,3 ^{-0,15}	2,8 ^{+0,1}	3,8 ^{-0,1}
100	6,0	030-8589-000	3,6	6,25 ^{-0,15}	3,5 ^{+0,1}	6,8 ^{-0,1}
	10,0	030-8590-000	3,6	6,25 ^{-0,15}	4,8 ^{+0,1}	6,8 ^{-0,1}
	2,0 - 3,0	030-8612-010	3,6	6,25 ^{-0,15}	2,5 ^{+0,05}	6,8 ^{-0,1}
	4,0	030-8612-020	3,6	6,25 ^{-0,15}	2,8 ^{+0,1}	6,8 ^{-0,1}

Cannon  ITT Industries



size	mm ²			
15	0,3 – 1,5	M22520-1-01	995-0001-585	TH 452
15S	0,3 – 1,5			
25	0,3 – 4,0			

Pneumatic crimp tool

for pin / socket contacts acc to VG95234 and Cannon contacts with reduced termination size

Contact size	Wire size mm ²	Pneumatic table crimp tool	Order reference	Bench mount	Order reference	Foot pedal	Order reference	
15	0,3 – 1,5	WA27F-CE	121586-5067	BM-2	121586-5068	WA10	121586-5069	
15S	0,3 – 1,5							
25	0,3 – 4,0							

Hydraulic hand crimp tool

for pin / socket contacts acc to VG95234 and Cannon contacts with reduced termination size

Contact size	Wire size mm ²	Hand pump	Order reference	Foot pedal	Order reference	High pressure hose 2 m	Order reference	Crimp head
100	2,0 – 10,0	4601.00000.330	121586-0027	4601.51000.330	121586-0008	4604.00000.020	121586-0023	4632.0000
		Safety device incl. Bench mounting	Order reference	Positioner	Order reference	Crimp Turrets (upper crimp die) Order reference		Crimp Turret Order reference
		CT121086-3079	121086-3079	121086-3080	121086-3080	317-8531-000		317-8531-

Note: Hydraulic electro pump (HK 12EL) upon request.

Insertion tools / Extraction tools

Contact size	Insertion tools		Insertion pliers		Extraction tools	
	Part No.	Order reference	Part No.	Order reference	Part No.	Order reference
15	CIT 16	121086-3008	CIT-F80-16	121086-0097	CET-F80-16	121086-0097
25	CIT 12	121086-3007	CIT-F80-12	121086-0096	CET-F80-12	121086-0096
100	CIT 8	121086-0095			CET-8	121086-0095


Crimp contacts

Connectors of series CA-COM and CA-COM-B are also available with crimp contacts for AWG wire sizes. In order to wire, insert and extract contacts, the tools mentioned on this page are needed. All tools have to be ordered separately.

Please ask for our detailed Wiring and Assembly instructions.

Hydraulic hand crimp tool

- 1 Hand pump
- 2 Foot pedal
- 3 High pressure hose 2 m
- 4 Crimp head
- 5 Safety device incl. bench mounting
- 6 Positioner
(to be used with 121086-3079 only)

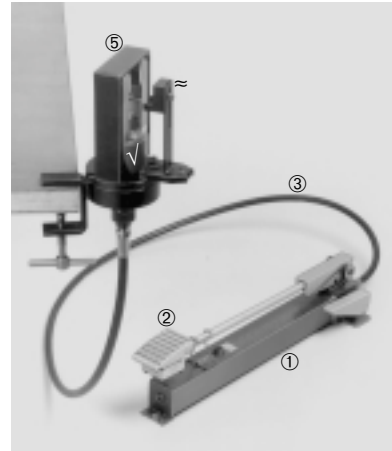

Technical Data

Hand pump:

Length
Width
Height
Oil contents
Usable oil quality
Output per lift

High pressure hose:

Length

Crimp head:

Crimp force
Lift (with positioners)
Weight (incl. oil)

Insertion tools / Extraction tools



Insertion tool



Insertion pliers



Extraction tool

1. MATERIAL CONTENT AND PHYSICAL FORM

Electrical connectors do not usually contain hazardous materials. They contain conducting and non-conducting materials and can be divided into two groups.

a) Printed circuit types and low cost audio types which employ all plastic insulators and casings.

b) Rugged, Fire Barrier and High Reliability types with metal casings and either natural rubber, synthetic rubber, plastic or glass insulating materials.

Contact materials vary with type of connector and also application and are usually manufactured from either copper, copper alloys, nickel, alumel, chromel or steel. In special applications, other alloys may be specified.

2. FIRE CHARACTERISTICS AND ELECTRIC SHOCK HAZARD

There is no fire hazard when the connector is correctly wired and used within the specified parameters. Incorrect wiring or assembly of the connector or careless use of metal tools or conductive fluids, or transit damage to any of the component parts may cause electric shock or burns. Live circuits must not be broken by separating mated connectors as this may cause arcing, ionisation and burning.

Heat dissipation is greater at maximum resistance in a circuit. Hot spots may occur when resistance is raised locally by damage, e.g. cracked or deformed contacts, broken strands of wire. Local overheating may also result from the use of the incorrect application tools or from poor quality soldering or slack screw terminals. Overheating may occur if the ratings in the Product Data Sheet/Catalogue are exceeded and can cause breakdown of insulation and hence electric shock.

If heating is allowed to continue it intensifies by further increasing the local resistance through loss of temper of spring contacts, formation of oxide film on contacts and wires, and leakage currents through carbonisation of insulation and tracking paths. Fire can then result in the presence of combustible materials and this may release noxious fumes. Overheating may not be visually apparent. Burns may result from touching overheated components.

Electrical connectors may be damaged in transit to the customers, and damage may result in creation of hazards. Products should therefore be examined prior to installation/use and rejected if found to be damaged.

4. DISPOSAL

Incineration of certain materials may release noxious or even toxic fumes.

5. APPLICATION

Connectors with exposed contacts should not be selected for use on the current supply side of an electrical circuit, because an electric shock could result from touching exposed contacts on an unmated connector. Voltages in excess of 30 V ac or 42.5 V dc are potentially hazardous and care should be taken to ensure that such voltages can not be transmitted in any way to exposed metal parts of the connector body. The connector and wiring should be checked, before making live, to have no damage to metal parts or insulators, no solder blobs, loose strands, conducting lubricants, swarf, or any other undesired conducting particles. Insulation resistance should be checked to make certain that no low resistance joints or spurious conducting path are existing between contacts and exposed metal parts of the connector body. Further the contact resistance of the connectors should be measured within the electrical circuit in order to identify high resistances which result in excessive connector heating.

For operation voltage please refer to the relevant regulations.

IMPORTANT GENERAL INFORMATION

1. Air and creepage paths/Overvoltage protection
The admissible operating voltage for individual applications and other applicable safety regulations must be observed.

For this reason the air and creepage paths due to PC B are only reference values. Observe the relevant regulations.

2. Temperature

All information given are for reference only. The operation temperature depends on the application.

3. Other important information
Cannon continuously endeavours to improve its products. Therefore, Cannon reserves the right to change the description, technical data and drawings shown in this catalogue and on the products without notice.

4. Harnessing and Assembly Instructions
If applicable, our special harnessing and assembly instruction has to be followed. Please contact us at request.

ITT Cannon, a division of ITT Industries, Inc. manufactures the highest quality products available in the world. These products are intended to be used in accordance with the specifications in this catalog. Any deviation from stated operating specifications is not recommended and may be unsafe. No information in this catalog shall be construed to create any liability on the part of Cannon. Any new issue of this catalog shall invalidate and supersede any and all previous issues. **A limited warranty applies to Cannon products.** Cannon assumes no responsibility for consequential damages of any kind, whether or not based on express or implied warranty, strict liability arising in connection with the design, manufacture, sale, use or repair of the products. Prices and delivery dates are exclusively subject to our respective order confirmation form; the same applies to development samples delivered. This catalog is not to be construed as an offer. It is intended to make an offer. By this publication, Cannon does not assume responsibility or any liability for any patent rights of third parties which may result from its use. Reprinting this catalog is generally permitted. However, Cannon's prior consent must be obtained in all cases.

Cannon is a trademark of ITT Industries, Inc



EEPW 电子產品世界
.com.cn





1140 Brussels, Belgium
FAX: (02) 7269201 PH: (02) 726 75 94
NL
FAX: 31.35.691.8796 PH: 31.35.691.6855

China
No. 24, 2 Block
Taohuawu New District
Zhenjiang, Jiangsu
P.R.C.
FAX: 86 511 4428616 PH: 86 511 443 3399

Denmark
Park Allé 287 A
2605 Brøndby
FAX: 43 43 58 58 PH: 43 45 52 88

Finland
Virkatie 1
1510 Vantaa
FAX: +358 9 70039188 PH: +358 9 70039180

France
2, Ave Sablons Bouillants, B.P. 133
77109 Meaux
FAX: (1) 64 33 16 82 PH: (1) 60 24 51 51

Germany
Postfach 11 20, 71365 Weinstadt
Cannonstrasse 1, 71384 Weinstadt
FAX: (07151) 699217 PH: (07151) 699-0

Hong Kong
Unit 901 & 912, West Tower
Shun Tak Center
168-200 Connaught Road
Central
FAX: (852) 2732-2919 PH: (852) 2732-2720

FAX: 0462-57-1680 PH:
Korea
620, Changkang Bldg.
#22, Dohwa-dong, Mapo-ku
Seoul
FAX: (02) 717 7330 PH:

Spain
Parque Empresarial San Fernando
Edificio Italia 1ª Planta
28830 Madrid
FAX: (34) 91 656 15 83 PH:

Sweden
Norr Mälarstrand 64
Jaktvarvet 1
11235 Stockholm
FAX: (46) 8 650 0072 PH:

Switzerland
Herzogenmühle 18
8304 Wallisellen
FAX: (01) 830-3104 PH:

United Kingdom
Jays Close, Viabes Estate
Basingstoke Hampshire RG22 4E
FAX: (01256) 323356 PH:

United States
666 E. Dyer Road
Santa Ana, CA 92705-5612
FAX: 714.628.2142 PH:

INTERNET
<http://www.ittcannon.com>

EEPW 電子產品世界
.com.cn

© 2000 ITT Industries, Cannon. Printed in Germany. All Rights Reserved.



#1171_CA-COM_englisch_250900

42



18.10.2000, 8:24 Uhr

Cannon

 **ITT Inc.**
Engineered for the future