


200 V - 1,000 V Three Phase Bridge

2.0 A Forward Current

70 ns - 3000 ns Recovery Time


3102 - 3110
3102F - 3110F
3102UF - 3110UF



ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

| Part Number | Working Reverse Voltage (Vrwm) Volts | Average Rectified Current @TC (Io) | | Reverse Current @ Vrwm (Ir) | | Forward Voltage (Vf) | | 1 Cycle Surge Current tp=8.3ms (Ifsm) | Repetitive Surge Current (Ifrm) | Reverse Recovery Time (1) (Trr) | Thermal Impd. θ_{J-c} |
|-------------|--|------------------------------------|-------|-----------------------------|-------|----------------------|------|--|---------------------------------|---------------------------------|------------------------------|
| | | 55°C | 100°C | 25°C | 100°C | 25°C | Amps | 25°C | 25°C | 25°C | °C/W |
| | | Amps | Amps | µA | µA | Volts | | Amps | Amps | ns | |
| 3102 | 200 | 2.0 | 1.2 | 1.0 | 25 | 1.1 | 1.0 | 30 | 10 | 3000 | 22.0 |
| 3106 | 600 | 2.0 | 1.2 | 1.0 | 25 | 1.1 | 1.0 | 30 | 10 | 3000 | 22.0 |
| 3110 | 1000 | 2.0 | 1.2 | 1.0 | 25 | 1.1 | 1.0 | 30 | 10 | 3000 | 22.0 |
| 3102F | 200 | 2.0 | 1.2 | 1.0 | 25 | 1.3 | 1.0 | 25 | 6 | 150 | 22.0 |
| 3106F | 600 | 2.0 | 1.2 | 1.0 | 25 | 1.3 | 1.0 | 25 | 6 | 150 | 22.0 |
| 3110F | 1000 | 2.0 | 1.2 | 1.0 | 25 | 1.3 | 1.0 | 25 | 6 | 150 | 22.0 |
| 3102UF | 200 | 2.0 | 1.2 | 1.0 | 25 | 1.7 | 1.0 | 25 | 5 | 70 | 22.0 |
| 3106UF | 600 | 2.0 | 1.2 | 1.0 | 25 | 1.7 | 1.0 | 25 | 5 | 70 | 22.0 |
| 3110UF | 1000 | 2.0 | 1.2 | 1.0 | 25 | 1.7 | 1.0 | 25 | 5 | 70 | 22.0 |

(1)Trr Testing: If=0.5A, Ir=1.0A, Irr=0.25A *Op. Temp.= -55°C to +150°C Stg. Temp.= -55°C to +150°C

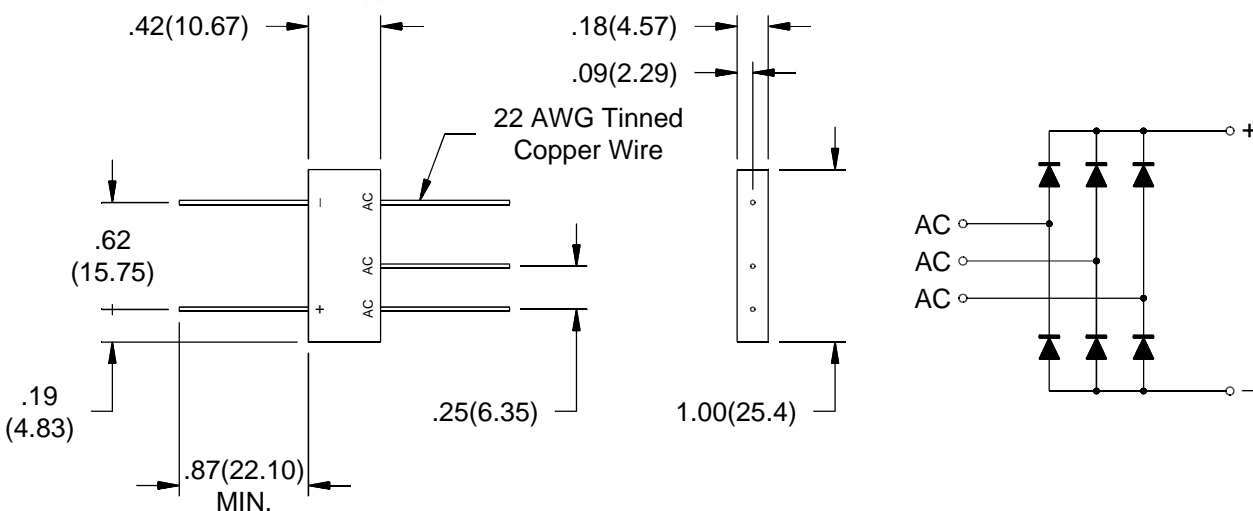




Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



VOLTAGE MULTIPLIERS INC.
 8711 W. Roosevelt Ave.
 Visalia, CA 93291

TEL 559-651-1402
 FAX 559-651-0740
 www.voltagemultipliers.com

3102 - 3110 • 3102F - 3110F • 3102UF - 3110UF

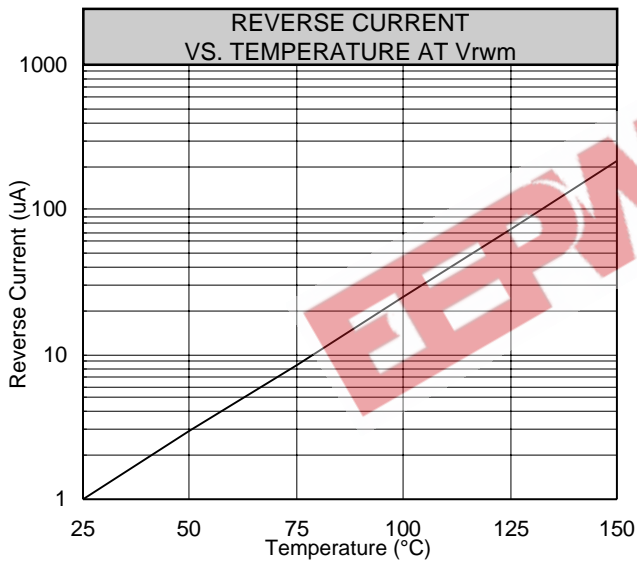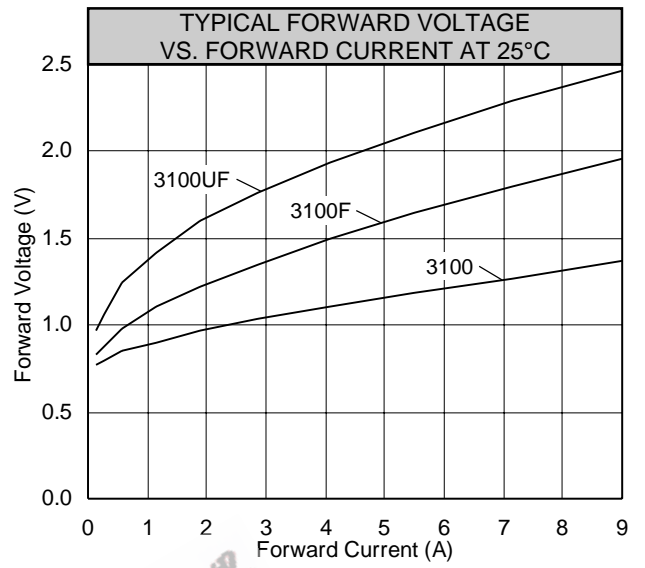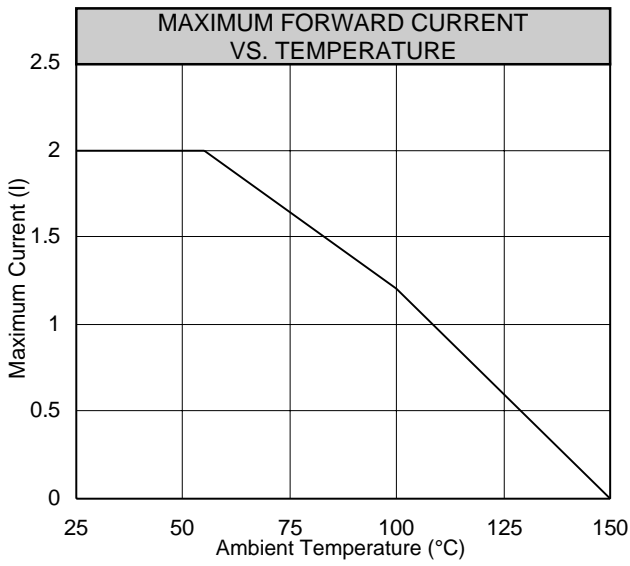

电子产品世界
EEPW.com.cn