

FAIRCHILD

A Schlumberger Company


IRF420-423/IRF820-823 T-37-11**MTP2N45/2N50****N-Channel Power MOSFETs,
3.0 A, 450 V/500 V**

Power And Discrete Division

Description


These devices are n-channel, enhancement mode, power MOSFETs designed especially for high speed applications, such as switching power supplies, converters, AC and DC motor controls, relay and solenoid drivers and other pulse circuits.

- Low $R_{DS(on)}$
- V_{GS} Rated at ± 20 V
- Silicon Gate for Fast Switching Speeds
- I_{DSS} , $V_{DS(on)}$, Specified at Elevated Temperature
- Rugged
- Low Drive Requirements
- Ease of Paralleling

TO-204AA

IS00020F

IRF420
IRF421
IRF422
IRF423

TO-220AB

IS00010F

IRF820
IRF821
IRF822
IRF823
MTP2N45
MTP2N50

Product Summary

Part Number	V_{DSS}	$R_{DS(on)}$	I_D at $T_C = 25^\circ C$	I_D at $T_C = 100^\circ C$	Case Style
IRF420	500 V	3.0 Ω	2.5 A	1.5 A	TO-204AA
IRF421	450 V	3.0 Ω	2.5 A	1.5 A	
IRF422	500 V	4.0 Ω	2.0 A	1.0 A	
IRF423	450 V	4.0 Ω	2.0 A	1.0 A	
IRF820	500 V	3.0 Ω	2.5 A	1.5 A	TO-220AB
IRF821	450 V	3.0 Ω	2.5 A	1.5 A	
IRF822	500 V	4.0 Ω	2.0 A	1.0 A	
IRF823	450 V	4.0 Ω	2.0 A	1.0 A	
MTP2N45	450 V	4.0 Ω	3.0 A	2.0 A	
MTP2N50	500 V	4.0 Ω	3.0 A	2.0 A	

Notes

For information concerning connection diagram and package outline, refer to Section 7.

IRF420-423/IRF820-823
MTP2N45/2N50

T-39-11

Maximum Ratings

Symbol	Characteristic	Rating IRF420/422 IRF820/822 MTP2N50	Rating IRF421/423 IRF821/823 MTP2N45	Unit
V_{DS}	Drain to Source Voltage ¹	500	450	V
V_{DGR}	Drain to Gate Voltage ¹ $R_{GS} = 20 \text{ k}\Omega$	500	450	V
V_{GS}	Gate to Source Voltage	± 20	± 20	V
T_J, T_{stg}	Operating Junction and Storage Temperatures	-55 to +150	-55 to +150	°C
T_L	Maximum Lead Temperature for Soldering Purposes, 1/8" From Case for 5 s	275	275	°C

Maximum Thermal Characteristics

		IRF420-423/ IRF820-823	MTP2N45/2N50	
$R_{\theta JC}$	Thermal Resistance, Junction to Case	3.12	1.67	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	30/80	80	°C/W
P_D	Total Power Dissipation at $T_C = 25^\circ\text{C}$	40	75	W
I_{DM}	Pulsed Drain Current ²	10	10	A

Electrical Characteristics ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Characteristic	Min	Max	Unit	Test Conditions
Off Characteristics					
$V_{(BR)DSS}$	Drain Source Breakdown Voltage ¹			V	$V_{GS} = 0 \text{ V}, I_D = 250 \text{ }\mu\text{A}$
	IRF420/422/820/822/ MTP2N50	500			
	IRF421/423/821/823/ MTP2N45	450			
I_{DSS}	Zero Gate Voltage Drain Current		250	μA	$V_{DS} = \text{Rated } V_{DSS}, V_{GS} = 0 \text{ V}$
			1000	μA	$V_{DS} = 0.8 \times \text{Rated } V_{DSS},$ $V_{GS} = 0 \text{ V}, T_C = 125^\circ\text{C}$
I_{GSS}	Gate-Body Leakage Current			nA	$V_{GS} = \pm 20 \text{ V}, V_{DS} = 0 \text{ V}$
	IRF420-423		± 100		
	IRF820-823/MTP2N45/50		± 500		

IRF420-423/IRF820-823
MTP2N45/2N50

T-39-11

Electrical Characteristics (Cont.) ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Characteristic	Min	Max	Unit	Test Conditions
On Characteristics					
$V_{GS(th)}$	Gate Threshold Voltage			V	
	IRF420-423/IRF820-823	2.0	4.0		$I_D = 250\ \mu\text{A}$, $V_{DS} = V_{GS}$
	MTP2N45/MTP2N50	2.0	4.5		$I_D = 1.0\ \text{mA}$, $V_{DS} = V_{GS}$
$R_{DS(on)}$	Static Drain-Source On-Resistance ²			Ω	$V_{GS} = 10\ \text{V}$, $I_D = 1.0\ \text{A}$
	IRF420/421/820/821		3.0		
	IRF422/423/822/823		4.0		
	MTP2N45/50		4.0		
$V_{DS(on)}$	Drain-Source On-Voltage ²			V	$V_{GS} = 10\ \text{V}$; $I_D = 2.0\ \text{A}$
			10	V	$V_{GS} = 10\ \text{V}$; $I_D = 1.0\ \text{A}$
			8	V	$T_C = 100^\circ\text{C}$
g_{fs}	Forward Transconductance	1.0		S (Ω)	$V_{DS} = 10\ \text{V}$, $I_D = 1.0\ \text{A}$

Dynamic Characteristics

C_{iss}	Input Capacitance		400	pF	$V_{DS} = 25\ \text{V}$, $V_{GS} = 0\ \text{V}$ $f = 1.0\ \text{MHz}$
C_{oss}	Output Capacitance		100	pF	
C_{rss}	Reverse Transfer Capacitance		40	pF	

Switching Characteristics ($T_C = 25^\circ\text{C}$, Figures 1, 2)³

$t_{d(on)}$	Turn-On Delay Time		40	ns	$V_{DD} = 250\ \text{V}$, $I_D = 1.0\ \text{A}$ $V_{GS} = 10\ \text{V}$, $R_{GEN} = 50\ \Omega$ $R_{GS} = 50\ \Omega$
t_r	Rise Time		50	ns	
$t_{d(off)}$	Turn-Off Delay Time		60	ns	
t_f	Fall Time		60	ns	
Q_g	Total Gate Charge		15	nC	$V_{GS} = 10\ \text{V}$, $I_D = 3.0\ \text{A}$ $V_{DD} = 200\ \text{V}$

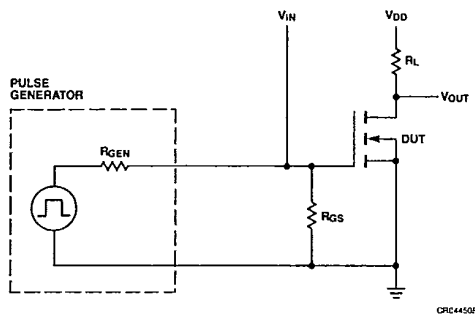
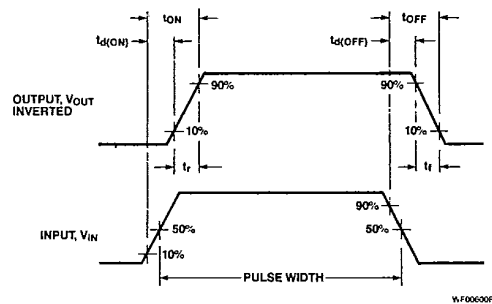

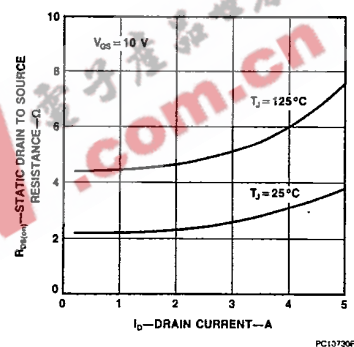


Symbol	Characteristic	Typ	Max	Unit	Test Conditions
Source-Drain Diode Characteristics					
V_{SD}	Diode Forward Voltage		1.4	V	$I_S = 2.5\ \text{A}$; $V_{GS} = 0\ \text{V}$
			1.3	V	$I_S = 2.0\ \text{A}$; $V_{GS} = 0\ \text{V}$
t_{rr}	Reverse Recovery Time	600		ns	$I_S = 2.5\ \text{A}$; $di_S/dt = 100\ \text{A}/\mu\text{S}$

Notes

- $T_J = +25^\circ\text{C}$ to $+150^\circ\text{C}$
- Pulse width limited by T_J
- Switching time measurements performed on LEM TR-58 test equipment.

IRF420-423/IRF820-823
MTP2N45/2N50

T-39-11

Typical Electrical Characteristics**Figure 1 Switching Test Circuit****Figure 2 Switching Waveforms****Typical Performance Curves****Figure 3 Output Characteristics****Figure 4 Static Drain to Source Resistance vs Drain Current****Figure 5 Transfer Characteristics****Figure 6 Temperature Variation of Gate to Source Threshold Voltage**

IRF420-423/IRF820-823
MTP2N45/2N50

T-39-11

Typical Performance Curves (Cont.)

Figure 7 Capacitance vs Drain to Source Voltage




Figure 9 Forward Biased Safe Operating Area for IRF420-423 and IRF820-823




Figure 11 Forward Biased Safe Operating Area for MTP2N45/2N50




Figure 8 Gate to Source Voltage vs Total Gate Charge




Figure 10 Transient Thermal Resistance vs Time for IRF420-423 and IRF820-823

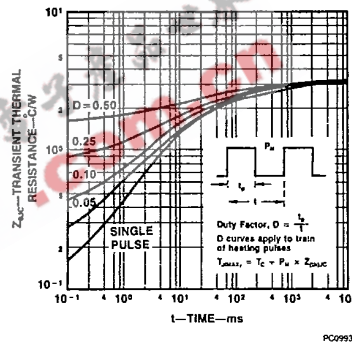


Figure 12 Transient Thermal Resistance vs Time for MTP2N45/2N50

