

H11L1X, H11L2X, H11L3X, H11L4X  
H11L1, H11L2, H11L3, H11L4



**MICROPROCESSOR COMPATIBLE  
SCHMITT TRIGGER OPTICALLY  
COUPLED ISOLATOR**

**APPROVALS**

- UL recognised, File No. E91231
- 'X' SPECIFICATION APPROVALS
- VDE 0884 in 2 available lead forms : -  
- STD  
- G form

**DESCRIPTION**


The H11L1, 2, 3, 4 series are optically coupled isolators consisting of a Gallium Arsenide infrared emitting diode and a Microprocessor Compatible Schmitt trigger output mounted in a standard 6 pin dual in line package.

**FEATURES**

- Options :-  
10mm lead spread - add G after part no.  
Surface mount - add SM after part no.  
Tape&reel - add SMT&R after part no.
- High data rate, 1MHz typical (NRZ)
- Microprocessor compatible drive
- Logic compatible output sinks 16 milliamperes at 0.4 volts maximum
- High Isolation Voltage (5.3kV<sub>RMS</sub>, 7.5kV<sub>PK</sub>)
- High common mode rejection ratio
- Fast switching :  $t_{rise}, t_{fall} = 100ns$  typical
- Wide supply voltage capability, compatible with all popular logic systems
- Guaranteed On / Off threshold hysteresis

**APPLICATIONS**

- Logic to logic isolator
- Line receiver-eliminates noise and transient problems
- Programmable current level sensor
- AC to TTL conversion - square wave shaping
- Digital programming of power supplies
- Interfaces computers with peripherals

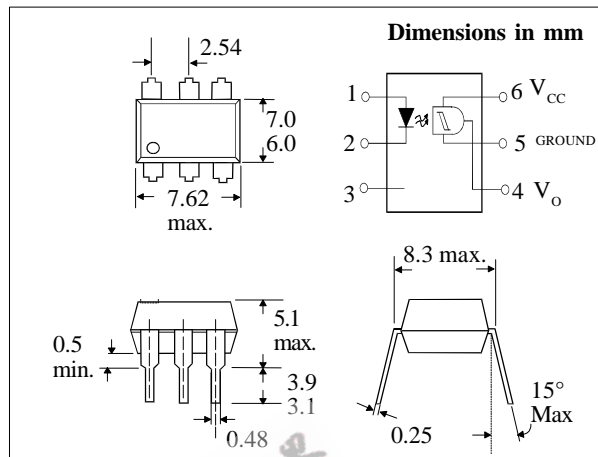

**ABSOLUTE MAXIMUM RATINGS  
(25°C unless otherwise specified)**

Storage Temperature \_\_\_\_\_ -55°C to + 150°C  
Operating Temperature \_\_\_\_\_ -55°C to + 100°C  
Lead Soldering Temperature  
(1/16 inch (1.6mm) from case for 10 secs) 260°C

**INPUT DIODE**


Forward Current \_\_\_\_\_ 60mA  
Reverse Voltage \_\_\_\_\_ 6V  
Power Dissipation  
(derate linearly 1.33mW / °C above 25°C) 105mW

**OUTPUT DETECTOR**

V<sub>45</sub> allowed range \_\_\_\_\_ 0 to 16V  
V<sub>65</sub> allowed range \_\_\_\_\_ 0 to 16V  
I<sub>4</sub> output current \_\_\_\_\_ 50mA  
Power Dissipation  
(derate linearly 2mW / °C above 25°C) 150mW

**POWER DISSIPATION**

Total Power Dissipation  
(derate linearly 2.27mW/ °C above 25°C) 170mW

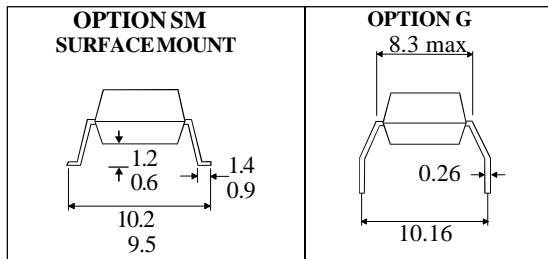

**ISOCOM COMPONENTS LTD**  
Unit 25B, Park View Road West,  
Park View Industrial Estate, Brenda Road  
Hartlepool, Cleveland, TS25 1YD  
Tel: (01429) 863609 Fax : (01429) 863581

**ISOCOM INC**  
1024 S. Greenville Ave, Suite 240,  
Allen, TX 75002 USA  
Tel: (214) 495-0755 Fax: (214) 495-0901  
e-mail info@isocom.com  
http://www.isocom.com


**ELECTRICAL CHARACTERISTICS (  $T_A = 25^\circ\text{C}$  Unless otherwise noted )**

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage ( $V_F$ )	0.75			V	$I_F = 0.3\text{mA}$ $I_F = 10\text{mA}$ $V_R = 3\text{V}$ $V = 0, f = 1\text{MHz}$
	Forward Voltage ( $V_F$ )			1.5	V	
	Reverse Current ( $I_R$ )			10	$\mu\text{A}$	
	Capacitance ( $C_j$ )			100	pF	
Output	Operating Voltage Range ( $V_{CC}$ )	3		15	V	$I_F = 0\text{mA}, V_{CC} = 5\text{V}$ $I_F = 0\text{mA}, V_{CC} = V_o = 15\text{V}$
	Supply Current $I_6$ (off)		1	5	mA	
	Output Current High ( $I_{OH}$ )			100	$\mu\text{A}$	
Coupled	Supply Current $I_6$ (on)		1.6	5	mA	$I_F = 10\text{mA}, V_{CC} = 5\text{V}$ $R_L = 270\Omega, V_{CC} = 5\text{V}$
	Output Voltage, Low ( $V_{OL}$ )			0.4	V	
	Turn-on Threshold Current $I_F$ (on)					
	H11L1			1.6	mA	$R_L = 270\Omega, V_{CC} = 5\text{V}$
	H11L2			10	mA	$R_L = 270\Omega, V_{CC} = 5\text{V}$
	H11L3			5	mA	$R_L = 270\Omega, V_{CC} = 5\text{V}$
	H11L4			2	mA	$R_L = 270\Omega, V_{CC} = 5\text{V}$
	Turn-off Threshold Current $I_F$ (off)	0.3			mA	$R_L = 270\Omega, V_{CC} = 5\text{V}$
	Hysteresis Ratio $I_F$ (off) / $I_F$ (on)	0.5	0.9			$R_L = 270\Omega, V_{CC} = 5\text{V}$
	Input to Output Isolation Voltage $V_{ISO}$	5300			$V_{RMS}$	See note 1
		7500			$V_{PK}$	See note 1
	Turn-on Time	$t_{on}$	0.57		$\mu\text{s}$	$R_E = 1200\Omega$
	Fall Time	$t_f$	0.09		$\mu\text{s}$	$C = 270\text{pF}$
Turn-off Time	$t_{off}$	1.40		$\mu\text{s}$	$f \leq 100\text{kHz}$	
Rise Time	$t_r$	0.05		$\mu\text{s}$	$tp = 1\mu\text{s}$ or greater	


Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.


**SWITCHING CHARACTERISTICS**

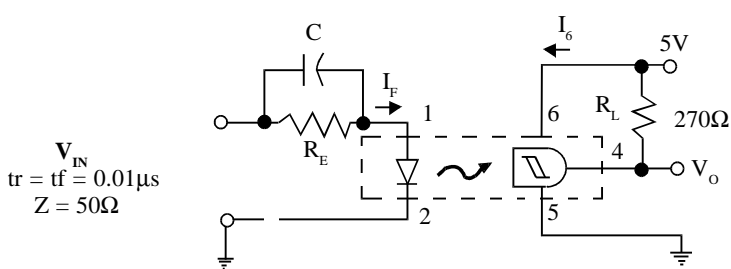


**SWITCHING TEST CIRCUIT**

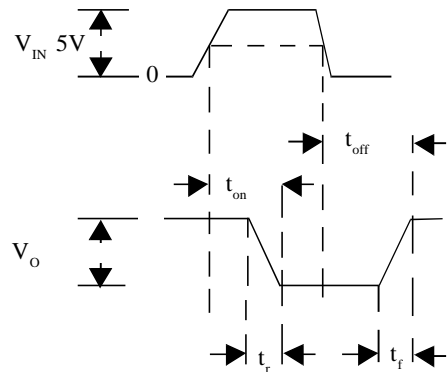


### Transfer Characteristics

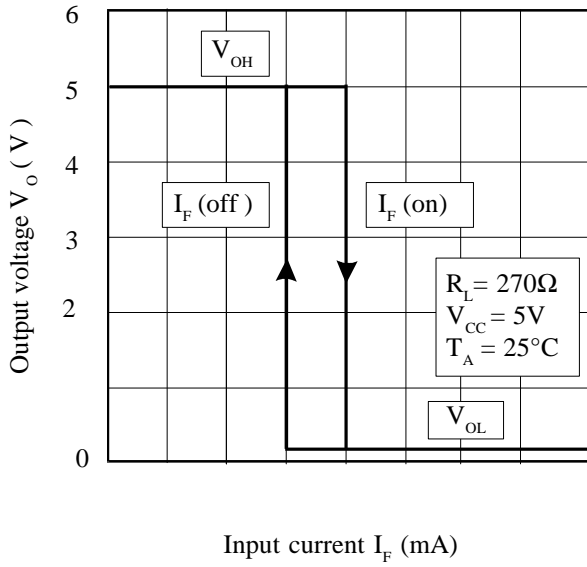


### On Voltage vs. Load Current

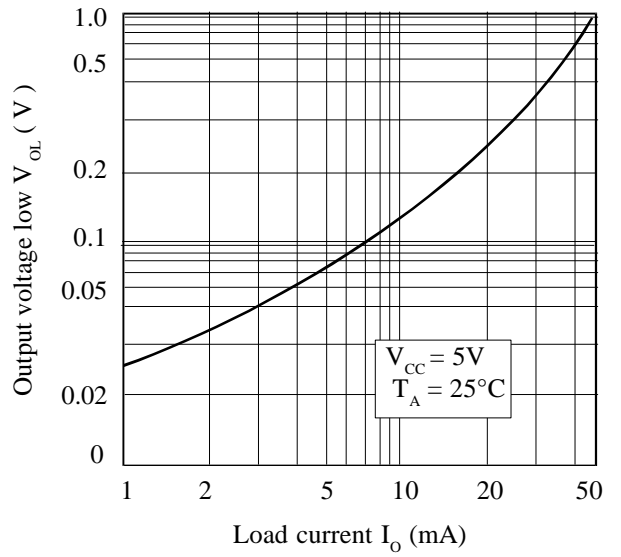


### Threshold Current vs. Supply Voltage

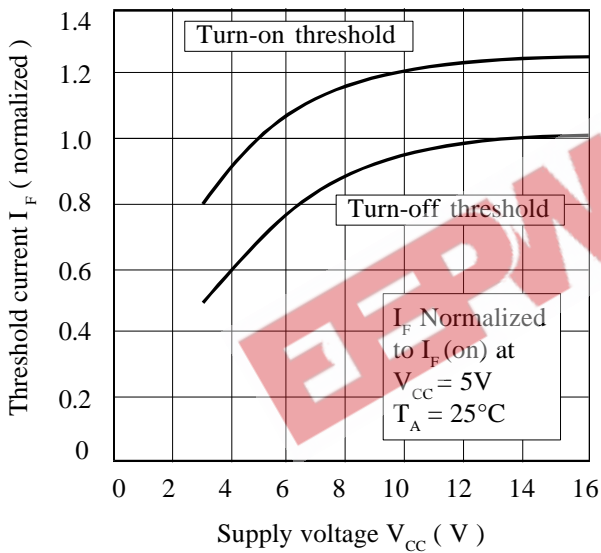

### Forward Voltage vs. Forward Current

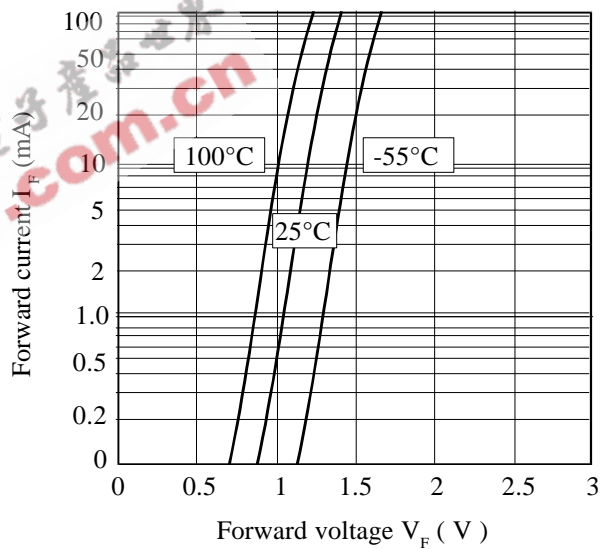

### Threshold Current vs. Ambient Temperature

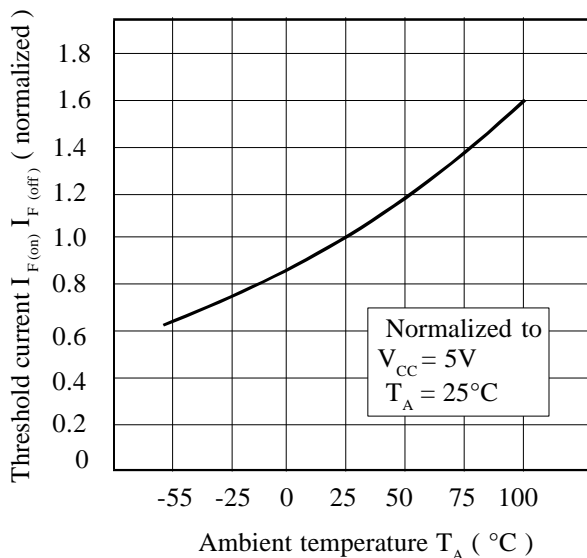

### Supply Current vs. Supply Voltage

