# Low-Voltage CMOS Quad **Buffer** With 5V-Tolerant Inputs and Outputs (3-State, Non-Inverting)


The MC74LCX125 is a high performance, non-inverting quad buffer operating from a 2.7 to 3.6V supply. High impedance TTL compatible inputs significantly reduce current loading to input drivers while TTL compatible outputs offer improved switching noise performance. A VI specification of 5.5V allows MC74LCX125 inputs to be safely driven from 5V devices. The MC74LCX125 is suitable for memory address driving and all TTL level bus oriented transceiver applications.


Current drive capability is 24mA at the outputs. The Output Enable (OEn) inputs, when HIGH, disable the outputs by placing them in a HIGH Z condition.

- Designed for 2.7 to 3.6V V<sub>CC</sub> Operation

- IOFF Specification Guarantees High Impedance When VCC = 0V
  LVTTL Compatible
  LVCMOS Compatible

- 24mA Balanced Output Sink and Source Capability
- Near Zero Static Supply Current in All Three Logic States (10μA) Substantially Reduces System Power Requirements
- Latchup Performance Exceeds 500mA
- ESD Performance: Human Body Model >2000V; Machine Model >200V

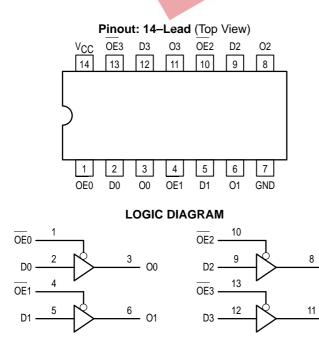

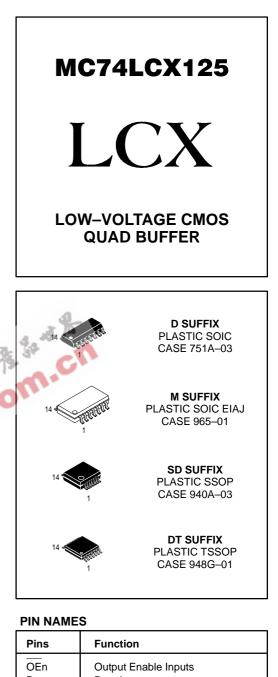

Dn Data Inputs On 3-State Outputs

#### **FUNCTION TABLE**

INPUTS		OUTPUTS
OEn	Dn	On
L	L	L
L	Н	Н
Н	Х	Z

H = High Voltage Level; L = Low Voltage Level; Z = High Impedance State; X = High or Low Voltage Level and Transitions Are Acceptable, for I<sub>CC</sub> reasons, DO NOT FLOAT Inputs



02

03

#### **ABSOLUTE MAXIMUM RATINGS\***

Symbol	Parameter	Value	Condition	Unit
VCC	DC Supply Voltage	-0.5 to +7.0		V
VI	DC Input Voltage	$-0.5 \leq V_{I} \leq +7.0$		V
VO	DC Output Voltage	$-0.5 \le V_O \le +7.0$	Output in 3–State	V
		$-0.5 \le V_{O} \le V_{CC} + 0.5$	Note 1.	V
IIK	DC Input Diode Current	-50	V <sub>I</sub> < GND	mA
Іок	DC Output Diode Current	-50	V <sub>O</sub> < GND	mA
		+50	VO > NCC	mA
IO	DC Output Source/Sink Current	±50		mA
ICC	DC Supply Current Per Supply Pin	±100		mA
I <sub>GND</sub>	DC Ground Current Per Ground Pin	±100		mA
T <sub>STG</sub>	Storage Temperature Range	-65 to +150		°C

\* Absolute maximum continuous ratings are those values beyond which damage to the device may occur. Exposure to these conditions or conditions beyond those indicated may adversely affect device reliability. Functional operation under absolute-maximum-rated conditions is not implied.
 1. Output in HIGH or LOW State. IO absolute maximum rating must be observed.

#### **RECOMMENDED OPERATING CONDITIONS**

RECOMMEND	ED OPERATING CONDITIONS	. 3:	30 - 2 15			_
Symbol	Parameter	38 3	Min	Тур	Мах	Unit
VCC	Supply Voltage	Operating Data Retention Only	2.0 1.5	3.3 3.3	3.6 3.6	V
VI	Input Voltage		0		5.5	V
VO	Output Voltage (H	HIGH or LOW State) (3–State)	0 0		V <sub>CC</sub> 5.5	V
ЮН	HIGH Level Output Current, V <sub>CC</sub> = 3.0V -	3.6V			-24	mA
lol	LOW Level Output Current, V <sub>CC</sub> = 3.0V -	3.6V			24	mA
ЮН	HIGH Level Output Current, V <sub>CC</sub> = 2.7V -	3.0V			-12	mA
lol	LOW Level Output Current, V <sub>CC</sub> = 2.7V -	3.0V			12	mA
T <sub>A</sub>	Operating Free–Air Temperature		-40		+85	°C
$\Delta t / \Delta V$	Input Transition Rise or Fall Rate, $V_{IN}$ from $V_{CC} = 3.0V$	n 0.8V to 2.0V,	0		10	ns/V

#### DC ELECTRICAL CHARACTERISTICS

			$T_A = -40^{\circ}C$ to $+85^{\circ}C$		
Symbol	Characteristic	Condition	Min	Max	Unit
VIH	HIGH Level Input Voltage (Note 2.)	$2.7 \text{V} \leq \text{V}_{CC} \leq 3.6 \text{V}$	2.0		V
VIL	LOW Level Input Voltage (Note 2.)	$2.7V \le V_{CC} \le 3.6V$		0.8	V
VOH	HIGH Level Output Voltage	$2.7V \leq V_{CC} \leq 3.6V; \ I_{OH} = -100 \mu A$	V <sub>CC</sub> – 0.2		V
		$V_{CC} = 2.7V; I_{OH} = -12mA$	2.2		
		$V_{CC} = 3.0V; I_{OH} = -18mA$	2.4		
		$V_{CC} = 3.0V; I_{OH} = -24mA$	2.2		
V <sub>OL</sub>	LOW Level Output Voltage	$2.7V \leq V_{CC} \leq 3.6V; \ I_{OL}$ = 100µA		0.2	V
		V <sub>CC</sub> = 2.7V; I <sub>OL</sub> = 12mA		0.4	
		$V_{CC} = 3.0V; I_{OL} = 16mA$		0.4	
		$V_{CC} = 3.0V; I_{OL} = 24mA$		0.55	

2. These values of V<sub>1</sub> are used to test DC electrical characteristics only.

#### DC ELECTRICAL CHARACTERISTICS (continued)

			T <sub>A</sub> = −40°C to +85°C		
Symbol	Characteristic	Condition	Min	Max	Unit
Ц	Input Leakage Current	$2.7 \text{V} \le \text{V}_{CC} \le 3.6 \text{V}; \ 0 \text{V} \le \text{V}_{I} \le 5.5 \text{V}$		±5.0	μA
I <sub>OZ</sub>	3-State Output Current	$2.7 \leq V_{CC} \leq 3.6 \text{V}; \ 0\text{V} \leq \text{V}_{O} \leq 5.5 \text{V}; \\ \text{V}_{I} = \text{V}_{IH} \text{ or } \text{V} \text{ IL}$		±5.0	μΑ
IOFF	Power-Off Leakage Current	$V_{CC} = 0V; V_{I} \text{ or } V_{O} = 5.5V$		10	μA
ICC	Quiescent Supply Current	$2.7 \le V_{CC} \le 3.6V; V_I = GND \text{ or } V_{CC}$		10	μA
		$2.7 \leq V_{CC} \leq 3.6 \text{V}; \ 3.6 \leq \text{V}_I \text{ or } \text{V}_O \leq 5.5 \text{V}$		±10	μA
ΔlCC	Increase in I <sub>CC</sub> per Input	$2.7 \leq V_{CC} \leq 3.6 \text{V}; \text{ V}_{IH} = V_{CC} - 0.6 \text{V}$		500	μA

### AC CHARACTERISTICS ( $t_R = t_F = 2.5ns$ ; $C_L = 50pF$ ; $R_L = 500\Omega$ )

			Limits			
			$T_A = -40^{\circ}C \text{ to } +85^{\circ}C$		⊦85°C	
		26-	V <sub>CC</sub> = 3.0	V to 3.6V	V <sub>CC</sub> = 2.7V	
Symbol	Parameter	Waveform	Min	Max	Max	Unit
<sup>t</sup> PLH <sup>t</sup> PHL	Propagation Delay Input to Output	12	1.5 1.5	6.0 6.0	6.5 6.5	ns
<sup>t</sup> PZH <sup>t</sup> PZL	Output Enable Time to High and Low Level	2	1.5 1.5	7.0 7.0	8.0 8.0	ns
<sup>t</sup> PHZ <sup>t</sup> PLZ	Output Disable Time From High and Low Level	2	1.5 1.5	6.0 6.0	7.0 7.0	ns
<sup>t</sup> OSHL <sup>t</sup> OSLH	Output-to-Output Skew (Note 3.)			1.0 1.0		ns

 Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t<sub>OSHL</sub>) or LOW-to-HIGH (t<sub>OSLH</sub>); parameter guaranteed by design.


#### DYNAMIC SWITCHING CHARACTERISTICS

			T <sub>A</sub> = +25°C			
Symbol	Characteristic	Condition	Min	Тур	Max	Unit
V <sub>OLP</sub>	Dynamic LOW Peak Voltage (Note 4.)	$V_{\mbox{\scriptsize CC}}$ = 3.3V, $C_{\mbox{\scriptsize L}}$ = 50pF, $V_{\mbox{\scriptsize IH}}$ = 3.3V, $V_{\mbox{\scriptsize IL}}$ = 0V		0.8		V
VOLV	Dynamic LOW Valley Voltage (Note 4.)	$V_{\mbox{\scriptsize CC}}$ = 3.3V, $C_{\mbox{\scriptsize L}}$ = 50pF, $V_{\mbox{\scriptsize IH}}$ = 3.3V, $V_{\mbox{\scriptsize IL}}$ = 0V		0.8		V

Number of outputs defined as "n". Measured with "n–1" outputs switching from HIGH–to–LOW or LOW–to–HIGH. The remaining output is measured in the LOW state.

#### **CAPACITIVE CHARACTERISTICS**

Symbol	Parameter	Condition	Typical	Unit
C <sub>IN</sub>	Input Capacitance	$V_{CC}$ = 3.3V, $V_{I}$ = 0V or $V_{CC}$	7	pF
COUT	Output Capacitance	$V_{CC} = 3.3V$ , $V_I = 0V$ or $V_{CC}$	8	pF
C <sub>PD</sub>	Power Dissipation Capacitance	10MHz, $V_{CC}$ = 3.3V, $V_I$ = 0V or $V_{CC}$	25	pF

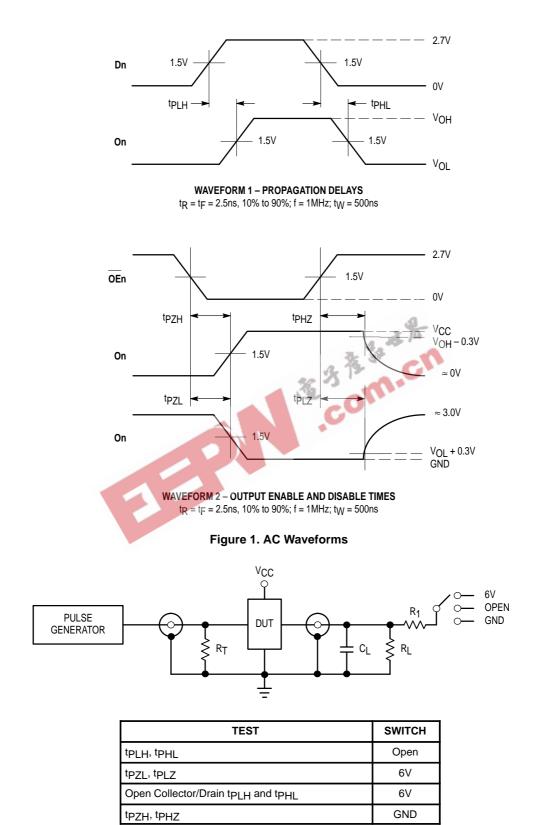


CL = 50pF or equivalent (Includes jig and probe capacitance)


 $R_L = R_1 = 500\Omega$  or equivalent  $R_T = Z_{OUT}$  of pulse generator (typically 50 $\Omega$ )

Figure 2. Test Circuit

#### OUTLINE DIMENSIONS

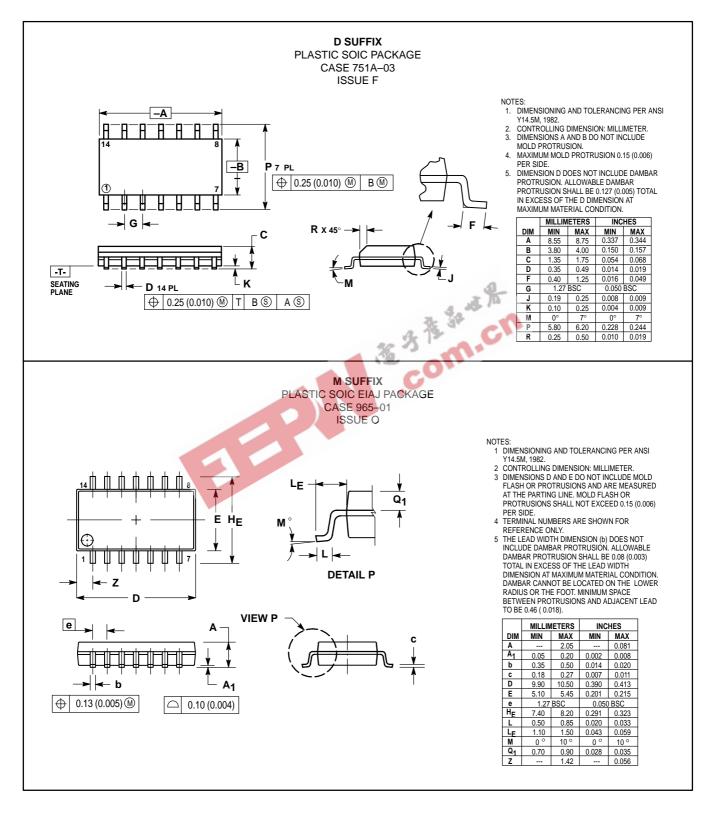



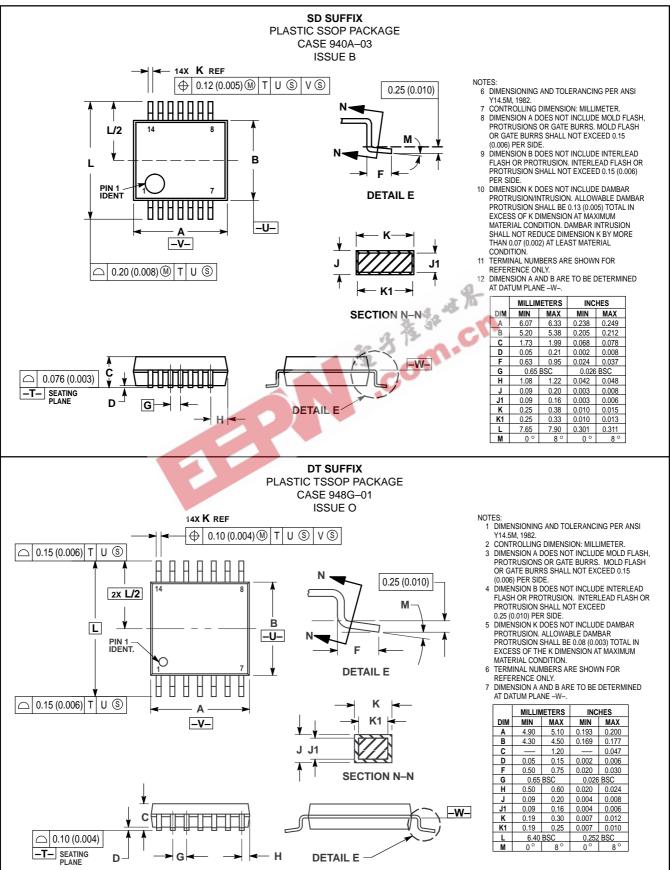



Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and **(Motorola**, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

#### How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 5405; Denver, Colorado 80217. 1–800–441–2447

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE 602-244-6609 INTERNET: http://Design-NET.com

0

JAPAN: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, 6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 81–3–3521–8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298

