

## Dual Channel Small Outline Optoisolators Transistor Output (Low Input Current)

The MOCD217 device consists of two gallium arsenide infrared emitting diodes optically coupled to two monolithic silicon phototransistor detectors, in a surface mountable, small outline, plastic package. It is ideally suited for high density applications and eliminates the need for through-the-board mounting.

- Dual Channel Coupler
- Convenient Plastic SOIC-8 Surface Mountable Package Style
- Low Input Current (Specified @ 1 mA)
- Minimum  $V_{(BR)CEO}$  of 30 Volts Guaranteed
- Standard SOIC-8 Footprint, with 0.050" Lead Spacing
- Shipped in Tape and Reel, which conforms to EIA Standard RS481A
- Compatible with Dual Wave, Vapor Phase and IR Reflow Soldering
- High Input-Output Isolation of 3000 Vac (rms) Guaranteed
- Meets U.L. Regulatory Requirements, File #E54915

### Ordering Information:

- To obtain MOCD217 in tape and reel, add R2 suffix to device number as follows:  
R2 = 2500 units on 13" reel
- To obtain MOCD217 in quantities of 50 (shipped in sleeves) — no suffix

### Marking Information:

- MOCD217 = D217

### MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
<b>INPUT LED</b>			
Forward Current — Continuous	$I_F$	60	mA
Forward Current — Peak (PW = 100 $\mu\text{s}$ , 120 pps)	$I_{F(pk)}$	1.0	A
Reverse Voltage	$V_R$	6.0	V
LED Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	90 0.8	mW mW/ $^\circ\text{C}$
<b>OUTPUT TRANSISTOR</b>			
Collector-Emitter Voltage	$V_{CEO}$	30	V
Collector-Base Voltage	$V_{CBO}$	70	V
Emitter-Collector Voltage	$V_{ECO}$	7.0	V
Collector Current — Continuous	$I_C$	150	mA
Detector Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	150 1.76	mW mW/ $^\circ\text{C}$


NOTE: Thickness through insulation between input and output is  $\geq 0.5$  mm.

## MOCD217

[CTR = 100% Min]


Motorola Preferred Device

**DUAL CHANNEL  
SMALL OUTLINE  
OPTOISOLATOR  
TRANSISTOR OUTPUT**



**CASE 846-01, STYLE 3  
PLASTIC**

### SCHEMATIC



1. ANODE 1
2. CATHODE 1
3. ANODE 2
4. CATHODE 2
5. EMITTER 2
6. COLLECTOR 2
7. EMITTER 1
8. COLLECTOR 1

Preferred devices are Motorola recommended choices for future use and best overall value.

## MOCD217

### MAXIMUM RATINGS — continued ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
<b>TOTAL DEVICE</b>			
Input–Output Isolation Voltage <sup>(1,2)</sup> (60 Hz, 1.0 sec. duration)	$V_{ISO}$	3000	Vac(rms)
Total Device Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	250 2.94	mW mW/ $^\circ\text{C}$
Ambient Operating Temperature Range <sup>(3)</sup>	$T_A$	-55 to +100	$^\circ\text{C}$
Storage Temperature Range <sup>(3)</sup>	$T_{stg}$	-55 to +150	$^\circ\text{C}$
Lead Soldering Temperature (1/16" from case, 10 sec. duration)	—	260	$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)<sup>(4)</sup>

Characteristic	Symbol	Min	Typ <sup>(4)</sup>	Max	Unit
----------------	--------	-----	--------------------	-----	------

#### INPUT LED

Forward Voltage ( $I_F = 1.0\text{ mA}$ )	$V_F$	—	1.05	1.3	V
Reverse Leakage Current ( $V_R = 6.0\text{ V}$ )	$I_R$	—	0.1	100	$\mu\text{A}$
Capacitance	$C$	—	18	—	pF

#### OUTPUT TRANSISTOR


Collector–Emitter Dark Current	$(V_{CE} = 5.0\text{ V}, T_A = 25^\circ\text{C})$	$I_{CEO1}$	—	1.0	50	nA
	$(V_{CE} = 5.0\text{ V}, T_A = 100^\circ\text{C})$	$I_{CEO2}$	—	1.0	—	$\mu\text{A}$
Collector–Emitter Breakdown Voltage ( $I_C = 100\ \mu\text{A}$ )		$V_{(BR)CEO}$	30	90	—	V
Emitter–Collector Breakdown Voltage ( $I_E = 100\ \mu\text{A}$ )		$V_{(BR)ECO}$	7.0	7.8	—	V
Collector–Emitter Capacitance ( $f = 1.0\text{ MHz}, V_{CE} = 0$ )		$C_{CE}$	—	7.0	—	pF

#### COUPLED


Output Collector Current ( $I_F = 1.0\text{ mA}, V_{CE} = 5.0\text{ V}$ )	MOCD217	$I_C$ (CTR) <sup>(5)</sup>	1.0 (100)	1.3 (130)	—	mA (%)
Collector–Emitter Saturation Voltage ( $I_C = 100\ \mu\text{A}, I_F = 1.0\text{ mA}$ )		$V_{CE(sat)}$	—	0.35	0.4	V
Turn–On Time ( $I_C = 2.0\text{ mA}, V_{CC} = 10\text{ V}, R_L = 100\ \Omega$ )		$t_{on}$	—	7.5	—	$\mu\text{s}$
Turn–Off Time ( $I_C = 2.0\text{ mA}, V_{CC} = 10\text{ V}, R_L = 100\ \Omega$ )		$t_{off}$	—	5.7	—	$\mu\text{s}$
Rise Time ( $I_C = 2.0\text{ mA}, V_{CC} = 10\text{ V}, R_L = 100\ \Omega$ )		$t_r$	—	3.2	—	$\mu\text{s}$
Fall Time ( $I_C = 2.0\text{ mA}, V_{CC} = 10\text{ V}, R_L = 100\ \Omega$ )		$t_f$	—	4.7	—	$\mu\text{s}$
Input–Output Isolation Voltage ( $f = 60\text{ Hz}, t = 1.0\text{ sec.}$ ) <sup>(1,2)</sup>		$V_{ISO}$	3000	—	—	Vac(rms)
Isolation Resistance ( $V_{I-O} = 500\text{ V}$ ) <sup>(2)</sup>		$R_{ISO}$	$10^{11}$	—	—	$\Omega$
Isolation Capacitance ( $V_{I-O} = 0, f = 1.0\text{ MHz}$ ) <sup>(2)</sup>		$C_{ISO}$	—	0.2	—	pF

1. Input–Output Isolation Voltage,  $V_{ISO}$ , is an internal device dielectric breakdown rating.
2. For this test, pins 1, 2, 3 and 4 are common, and pins 5, 6, 7 and 8 are common.
3. Refer to Quality and Reliability Section in Opto Data Book for information on test conditions.
4. Always design to the specified minimum/maximum electrical limits (where applicable).
5. Current Transfer Ratio (CTR) =  $I_C/I_F \times 100\%$ .


**TYPICAL CHARACTERISTICS**

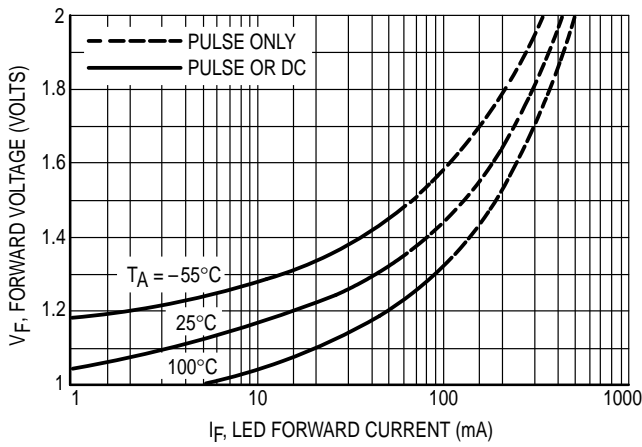


**Figure 1. LED Forward Voltage versus Forward Current**

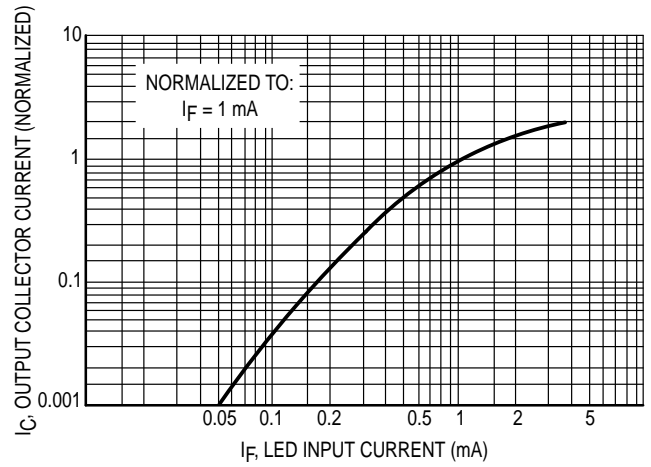


**Figure 2. Output Current versus Input Current**

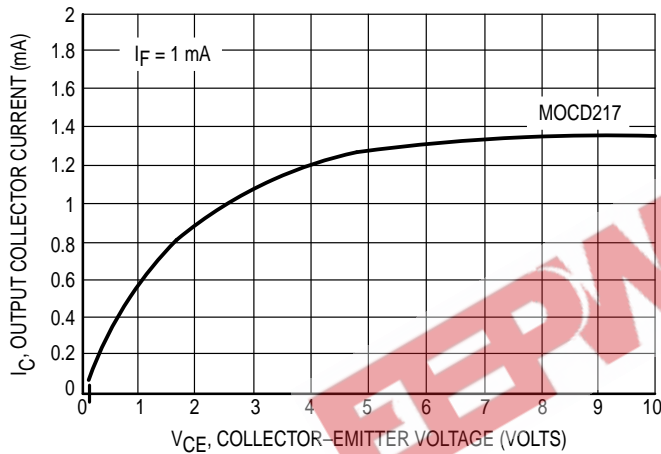


**Figure 3. Output Current versus Collector-Emitter Voltage**

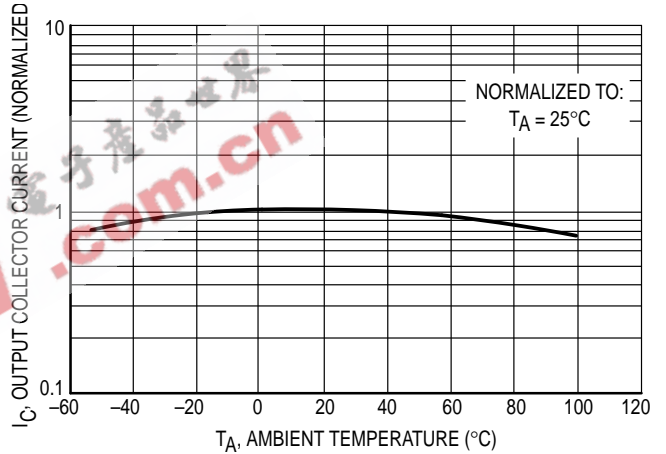

**Figure 4. Output Current versus Ambient Temperature**

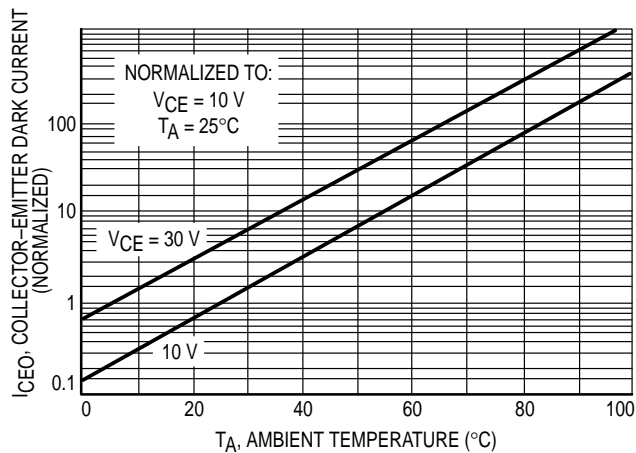


**Figure 5. Dark Current versus Ambient Temperature**

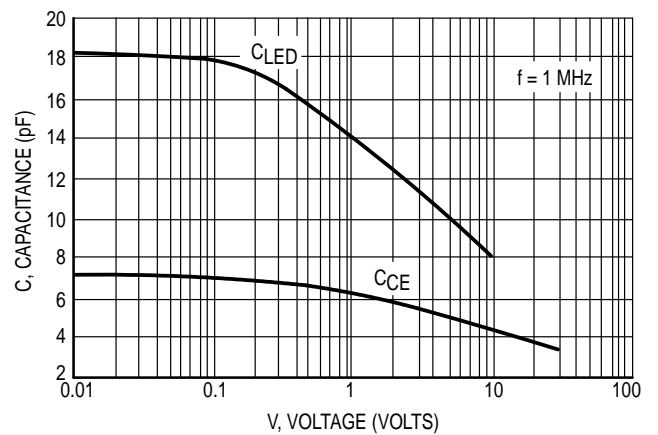

**Figure 6. Capacitance versus Voltage**

# MOCD217

## PACKAGE DIMENSIONS

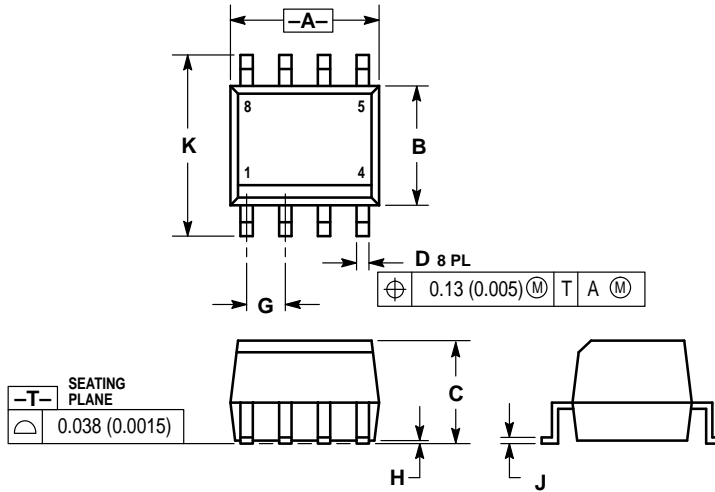


- NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.182	0.202	4.63	5.13
B	0.144	0.164	3.66	4.16
C	0.123	0.143	3.13	3.63
D	0.011	0.021	0.28	0.53
G	0.050 BSC		1.27 BSC	
H	0.003	0.008	0.08	0.20
J	0.006	0.010	0.16	0.25
K	0.224	0.244	5.69	6.19

- STYLE 3:  
 PIN 1. ANODE 1  
 2. CATHODE 1  
 3. ANODE 2  
 4. CATHODE 2  
 5. EMITTER 2  
 6. COLLECTOR 2  
 7. EMITTER 1  
 8. COLLECTOR 1

**CASE 846-01  
 ISSUE B  
 SO-8 SMALL OUTLINE OPTOISOLATOR**

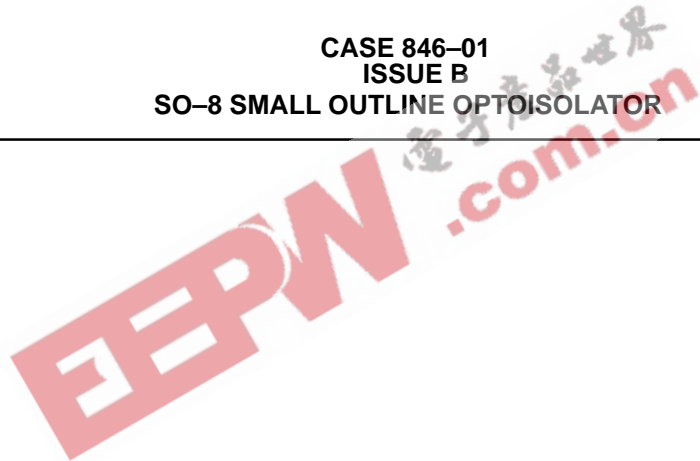

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

**How to reach us:**

**USA / EUROPE:** Motorola Literature Distribution;  
 P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

**JAPAN:** Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,  
 6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

**MFAX:** RMFAX0@email.sps.mot.com - TOUCHTONE (602) 244-6609  
**INTERNET:** http://Design-NET.com

**HONG KONG:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

