




**MOC3009 MOC3010  
MOC3011 MOC3012**

**PACKAGE DIMENSIONS**

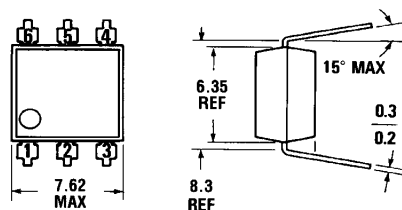

DIMENSIONS IN mm  
PACKAGE CODE E ST1603-02



Equivalent Circuit

C2081

**DESCRIPTION**

The MOC3009, MOC3010, MOC3011 and MOC3012 are optically isolated triac driver devices. These devices contain a GaAs infrared emitting diode and a light activated silicon bilateral switch, which functions like a triac. This series is designed for interfacing between electronic controls and power triacs to control resistive and inductive loads for 120 VAC operations.

**FEATURES**

- Low input current required (typically 5mA—MOC3011)
- High isolation voltage—minimum 7500 VAC peak
- Underwriters Laboratory (UL) recognized—File E90700

**APPLICATIONS**

- Triac driver
- Industrial controls
- Traffic lights
- Vending machines
- Motor control
- Solid state relay

**ABSOLUTE MAXIMUM RATINGS**

<b>TOTAL PACKAGE</b>	
Storage temperature	−55°C to 150°C
Operating temperature	−40°C to 100°C
Lead temperature (soldering 10 sec)	260°C
Withstand test voltage	7500 VAC Peak (50-60 Hz)

<b>INPUT DIODE</b>	
Forward DC current	50 mA
Reverse voltage	3 V
Peak forward current (1 μs pulse, 300 pps)	3.0 A
Power dissipation (25°C ambient)	100 mW
Derate linearly (above 25°C)	1.33 mW/°C

<b>OUTPUT DRIVER</b>	
Off-state output terminal voltage	250 volts
On-state RMS current (Full cycle, 50 to 60 Hz)	T <sub>a</sub> =25°C 100 mA T <sub>a</sub> =70°C 50 mA
Peak nonrepetitive surge current (PW=10 ms, DC=10%)	1.2 A
Total power dissipation @ T <sub>a</sub> =25°C	300 mW
Derate above 25°C	4.0 mW/°C

**ELECTRO-OPTICAL CHARACTERISTICS (25°C Temperature Unless Otherwise Specified)**
**INDIVIDUAL COMPONENT CHARACTERISTICS**

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
<b>INPUT DIODE</b>						
Forward voltage	$V_f$		1.2	1.50	V	$I_f = 10 \text{ mA}$
Junction capacitance	$C_j$		50		pF	$V_f = 0 \text{ V}, f = 1 \text{ MHz}$
Reverse leakage current	$I_r$			100	$\mu\text{A}$	$V_R = 3.0 \text{ V}$
<b>OUTPUT DETECTOR</b>						
Peak blocking current, either direction	$I_{DRM}$	—		100	nA	$V_{DRM} = 250 \text{ V}$ , Note 1
Peak on-state voltage, either direction	$V_{TM}$	—	2.0	3.0	Volts	$I_{TM} = 100 \text{ mA Peak}$

Note 1. Test voltage must be applied within dv/dt rating.

**TRANSFER CHARACTERISTICS**

DC CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS	
LED trigger current (current required to latch output)	MOC3009	$I_{ET}$	—	15.0	30	mA	Main terminal voltage = 3.0 V, $R_L = 150\Omega$
	MOC3010	$I_{ET}$	—	10.0	15	mA	
	MOC3011	$I_{ET}$	—	5	10	mA	
	MOC3012	$I_{ET}$	—	—	5	mA	
Holding current	$I_H$	—	100	—	$\mu\text{A}$	Either direction	

**TRANSFER CHARACTERISTICS**

CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
<b>AC dv/dt RATING</b> Critical rate of rise of off-state voltage	dv/dt	—	12.0	—	V/ $\mu\text{s}$	Static dv/dt (see Fig. 4)
Critical rate of rise of commutating voltage	dv/dt	—	0.2	—	V/ $\mu\text{s}$	Commutating dv/dt $I_{LOAD} = 15 \text{ mA}$ (see Fig. 4)

**ISOLATION CHARACTERISTICS**

CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
Isolation voltage	$V_{SO}$	5300			$V_{AC,RMS}$	$I_{IO} \leq 1 \mu\text{A}$ , 1 Minute
	$V_{SO}$	7500			$V_{AC,PEAK}$	$I_{IO} \leq 1 \mu\text{A}$ , 1 Minute
Isolation resistance	$R_{SO}$	$10^{11}$			ohms	$V_{IO} = 500 \text{ VDC}$
Isolation capacitance	$C_{SO}$		0.5		pF	$f = 1 \text{ MHz}$

**TYPICAL ELECTRICAL CHARACTERISTIC CURVES**

(25°C Free Air Temperature Unless Otherwise Specified)

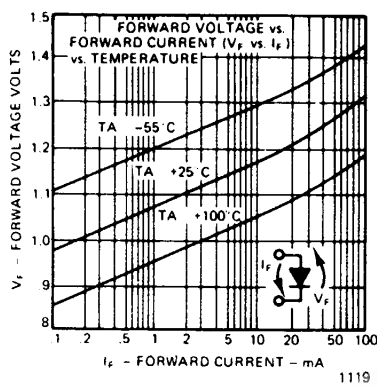


Fig. 1. Forward Voltage Drop vs. Forward Current

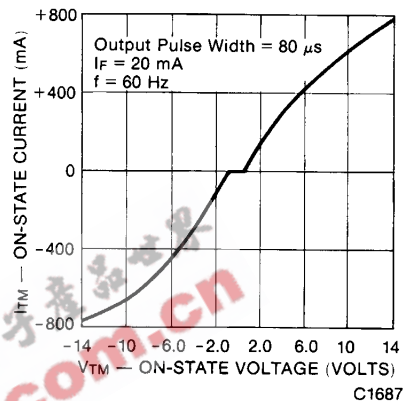


Fig. 2. On-State Characteristics

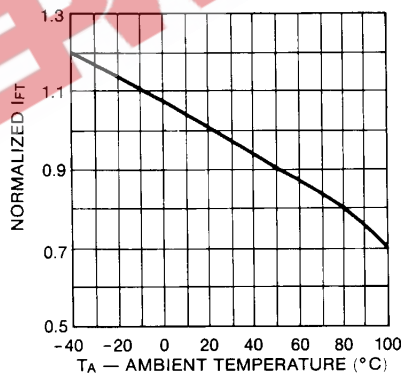


Fig. 3. Trigger Current vs. Temperature

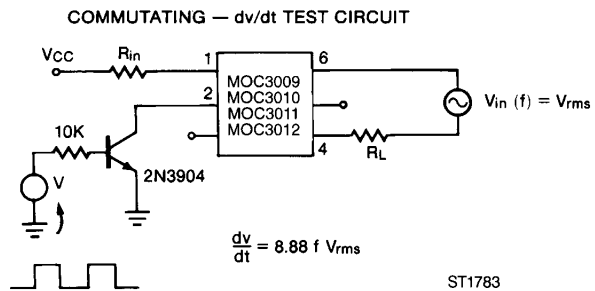
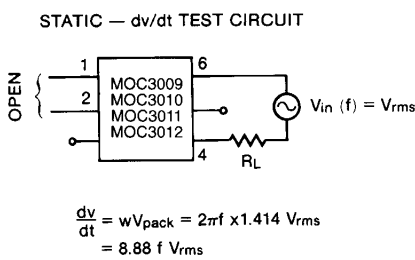


Fig. 4. dv/dt Test Circuits

ST1783

**TYPICAL ELECTRICAL CHARACTERISTIC CURVES**

(25°C Free Air Temperature Unless Otherwise Specified) (Cont'd)

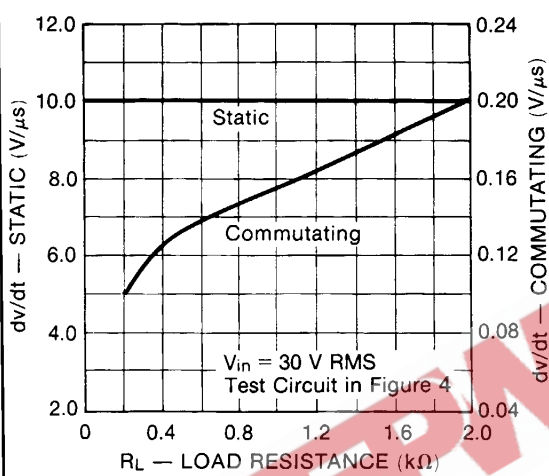


Fig. 5.  $dv/dt$  vs. Load Resistance

C1690

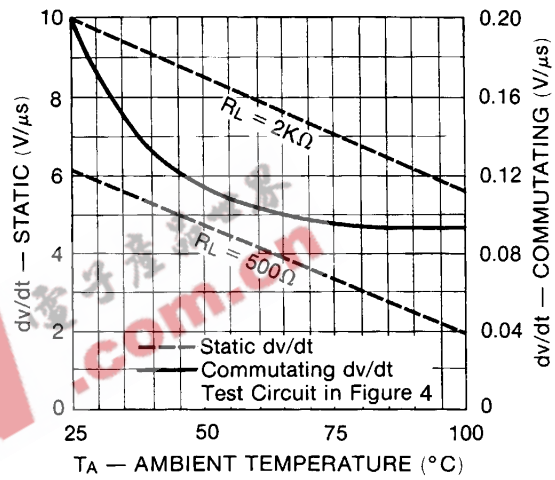


Fig. 6.  $dv/dt$  vs. Temperature

C1691

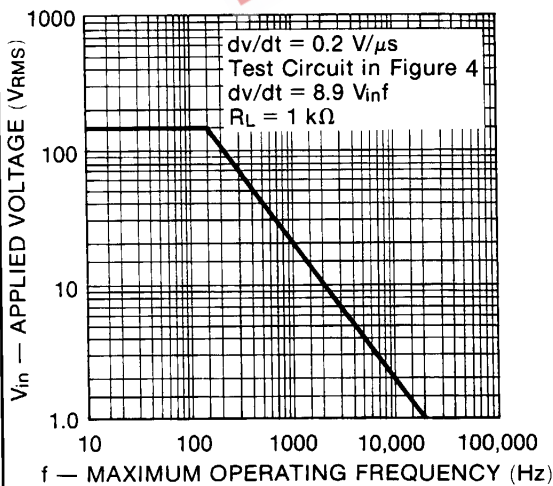


Fig. 7. Commutating  $dv/dt$  vs. Frequency

C1692

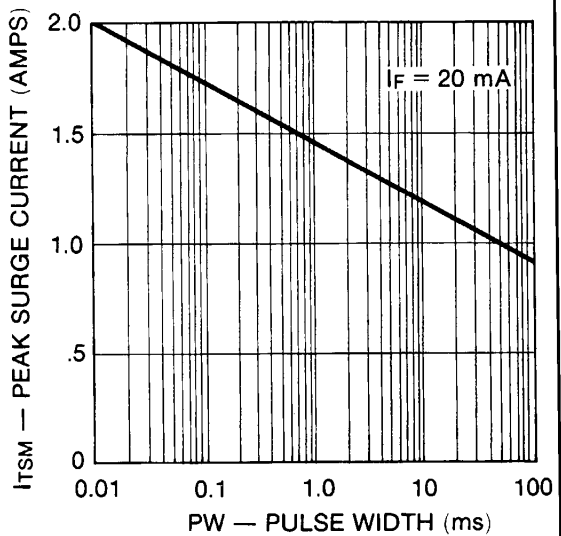


Fig. 8. Maximum Nonrepetitive Surge Current

C1696

**TYPICAL APPLICATION CIRCUITS**

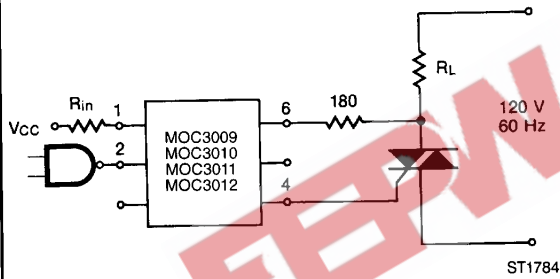


Fig. 9. Resistive Load

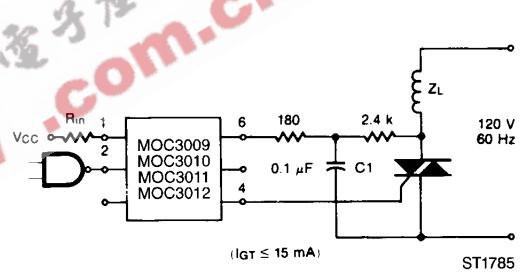


Fig. 10. Inductive Load With Sensitive Gate Triac

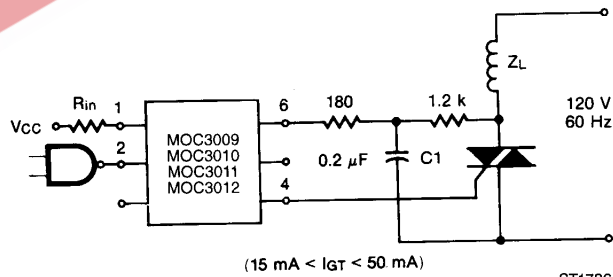


Fig. 11. Inductive Load With Non-Sensitive Gate Triac