

SS22L - SS215L


2.0 AMPS. Surface Mount Schottky Barrier Rectifiers

Sub SMA



Features

- ✧ For surface mounted application
- ✧ Low-Profile Package
- ✧ Ideal for automated pick & place
- ✧ Low power loss, high efficiency
- ✧ High current capability, low VF
- ✧ High surge current capability
- ✧ Plastic material used carriers Underwriters Laboratory Classification 94V-0
- ✧ Epitaxial construction
- ✧ High temperature soldering: 260°C / 10 seconds at terminals

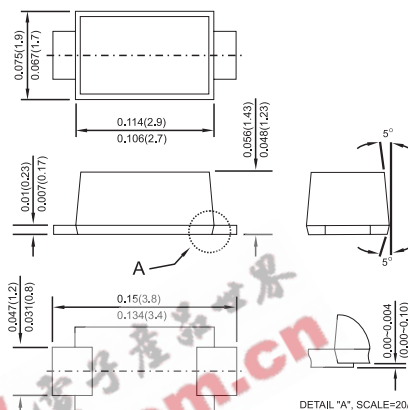

Mechanical Data

- ✧ Cases: Sub SMA plastic case
- ✧ Terminal : Pure tin plated, lead free.
- ✧ Polarity: Color band denotes cathode end
- ✧ Packaging: 12mm tape per EIA STD RS-481
- ✧ Weight approx. 15mg

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, de-rate current by 20%

Type Number	Symbol	SS 22L	SS 23L	SS 24L	SS 25L	SS 26L	SS 29L	SS 210L	SS 215L	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	90	100	150	V
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	63	70	105	V
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	90	100	150	V
Marking Code (Note 4)		22LYM	23LYM	24LYM	25LYM	26LYM	29LYM	20LYM	2ALYM	
Maximum Average Forward Rectified Current at T _L (See Fig. 1)	I _(AV)	2.0								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	50								A
Maximum Instantaneous Forward Voltage (Note 1) @ 2.0A	V _F	0.5			0.70		0.85		0.95	V
Maximum DC Reverse Current @ T _A =25°C at Rated DC Blocking Voltage @ T _A =125°C	I _R	0.4					0.1			mA
		15			10		5		mA	
Typical Junction Capacitance (Note 3)	C _j	130								pF
Typical Thermal Resistance (Note 2)	R _{θJL}	17								°C/W
	R _{θJA}	75								
Operating Temperature Range	T _J	-65 to +125			-65 to +150					°C
Storage Temperature Range	T _{STG}	-65 to +150								°C

- Notes:
1. Pulse Test with $PW=300 \mu\text{sec}$, 1% Duty Cycle
 2. Measured on P.C.Board with $0.27'' \times 0.27''$ (7.0mm x 7.0mm) Copper Pad Areas.
 3. Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.
 4. 22LYM: 2=2A, 2=20V, L-Low Profile, Y-Year Code, M-Month Code.

RATINGS AND CHARACTERISTIC CURVES (SS22L THRU SS215L)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

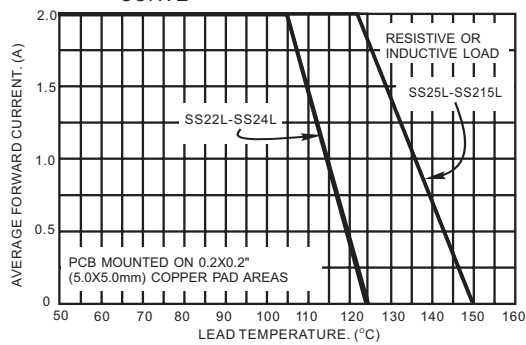


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

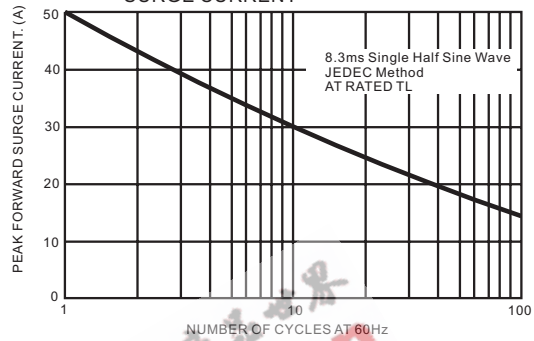


FIG.3- TYPICAL FORWARD CHARACTERISTICS

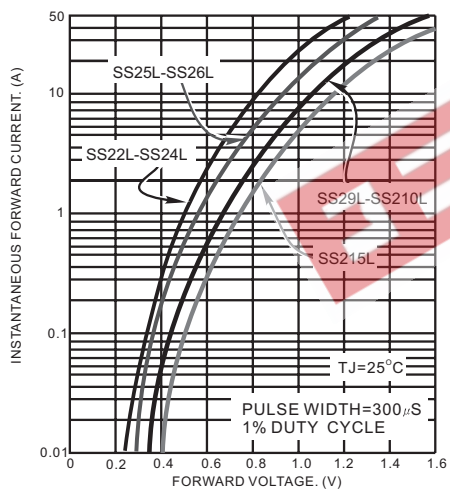


FIG.4- TYPICAL REVERSE CHARACTERISTICS

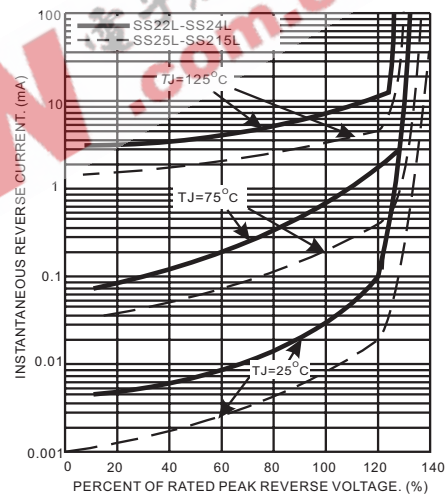


FIG.6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS

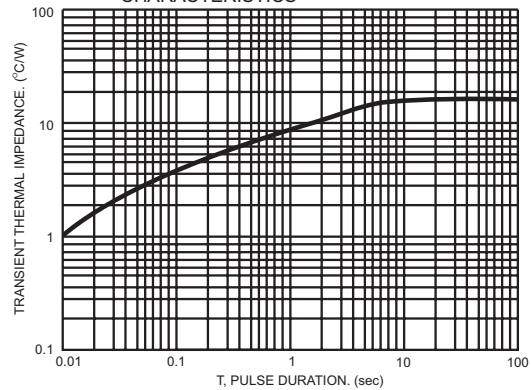


FIG.5- TYPICAL JUNCTION CAPACITANCE

