

**General**

**Specifications**

PT Transmitter (R.M.S.)

**1. GENERAL**

This instrument converts AC voltage signals output from PT, etc. to current or voltage signals.  
 • AC/DC conversion is made by root mean square.

**2. SPECIFICATIONS**

IO Specifications	
Input signal	0~110V AC or 0~150V AC
Input loss	0.5VA max
Input frequency	40Hz~10kHz
Permissible over-input	120% (continuous), 200% (1 minute)
Output signal	DC current or voltage signal
Zero point adjustment range	±5% of span
Span adjustment range	±5% of span
Standard performance	
Precision rating	±0.2% of span
Response speed	170ms 63% response (10~90%)
Insulation resistance	100MΩ min (at 500V DC) between input~output~power supply (DC drive) input~output~power supply~ground (AC drive)
Voltage withstand	2600V AC/minute between input~output, input~power supply 500V AC/minute between output~power supply (DC drive) 2600V AC/minute between input~output, input~power supply, input~ground 1500V AC/minute between output~power supply~ground (AC drive)
Ambient temperature and humidity	Normal operating condition: 0~50°C, 5~90% RH Operating limit: -10~60°C, 5~95% RH Storage condition: -40~70°C, 5~95% RH (no condensation)
Power supply voltage	85~264V AC 47~63Hz, 24V DC ±10%
Effect of power supply voltage fluctuation	±0.1% max of span per 85~264V AC or 24V DC ±10% fluctuation
Effect of change in ambient temperature	±0.2% max of span per 10°C change in temperature
Current dissipation	24V DC 90mA (WG1A-1), 60mA (WG1V-1)
Power dissipation	100V AC 7VA (WG1A-2), 6VA (WG1V-2)
Mountings and dimensions	
Material	Case: ABS plastic
Boards	Both sides glass-epoxy
Mounting methods	Rack, wall, or DIN rail
Connection method	M4-screw terminals
External dimensions	72 x 48 x 127 mm (h x w x d)
Weight	DC drive: approx. 150g, AC drive : approx. 300g
Accessories	
Tag number labels: 1	
Mounting blocks: 2	M4 mounting screws: 4

WG1  -  -  \* B

**TYPE NO.** \_\_\_\_\_

**OUTPUT SPECIFICATION** \_\_\_\_\_

A: Current  
V: Voltage

**Input signals** \_\_\_\_\_

1: 0~110V AC  
2: 0~150V AC  
0: Custom AC voltage signal  
(100% input voltage of 30~300V AC)

**OUTPUT SIGNAL** \_\_\_\_\_

WG1A	WG1V
A: 4~20mA DC	1: 0~10mV DC
B: 2~10mA DC	2: 0~100mV DC
C: 1~5mA DC	3: 0~1V DC
D: 0~20mA DC	4: 0~10V DC
E: 0~16mA DC	5: 0~5V DC
F: 0~10mA DC	6: 1~5V DC
G: 0~1mA DC	7: -10~+10V DC
Z: (custom) current signal (24mA max)	0: (custom) voltage signal (±10V max)

**POWER SUPPLY** \_\_\_\_\_

1: 24V DC±10% 2: 85~264V AC

DUAL OUTPUT SPECIFICATIONS		
Model	1st Output (selectable)	2nd Output
WG1A	4~20mA DC	1~5V DC
	2~10mA DC	
	1~5mA DC	
	0~20mA DC	
	0~16mA DC	
	0~10mA DC	
	0~1mA DC	
WG1V	0~10mV DC	1~5V DC
	0~100mV DC	
	0~1V DC	
	0~10V DC	
	0~5V DC	
	1~5V DC	
	-10~+10V DC	

The JUXTA W Series allows dual output.  
Enter/DO after the model code when ordering.

### High Voltage Withstand Specifications

The JUXTA W Series is also available in 2000V AC voltage withstand specifications. Contact your dealer for details.

### OUTPUT RESISTANCE AND PERMISSIBLE LOAD RESISTANCE


WG1A (DC Current Output)		
Output Signal	Output Resistance	Permissible Load Resistance
4~20mA DC	5MΩ min	0~750Ω
2~10mA DC		0~1500Ω
1~5mA DC		0~3000Ω
0~20mA DC		0~750Ω
0~16mA DC		0~900Ω
0~10mA DC		0~1500Ω
0~1mA DC		0~15kΩ
Others where I <sub>100</sub> =24mA max		

I<sub>100</sub>: 100% output current


WG1V (DC Voltage Output)		
Output Signal	Output Resistance	Permissible Load Resistance
0~10mV DC	100Ω max	250kΩ min
0~100mV DC		2kΩ min
0~1V DC	1Ω max	10kΩ min
0~10V DC		2kΩ min
0~5V DC		2kΩ min
1~5V DC		10kΩ min
-10~+10V DC		10kΩ min
Others where V <sub>100</sub> =10V max	V <sub>100</sub> ≤ 100mV	250kΩ min
	V <sub>100</sub> > 100mV	1Ω max

V<sub>100</sub>: 100% output voltage

### WIRING DIAGRAM

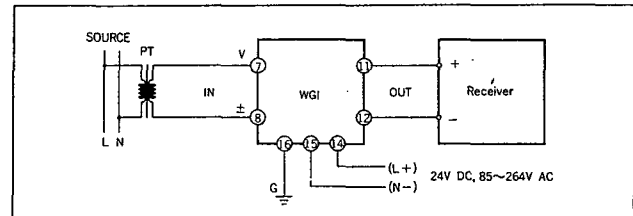

### EXTERNAL DIMENSION

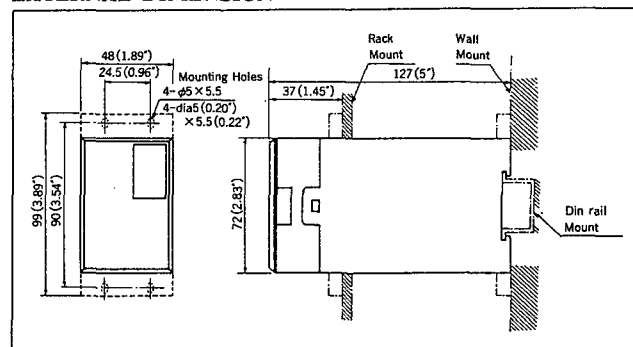

Subject to change without notice for grade up quality and performance