

RC4136, RM4136, RV4136 QUAD GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

SLOS072 – MARCH 1978 – REVISED SEPTEMBER 1990

- Continuous-Short-Circuit Protection
- Wide Common-Mode and Differential Voltage Ranges
- No Frequency Compensation Required
- Low Power Consumption
- No Latch-Up
- Unity Gain Bandwidth . . . 3 MHz Typ
- Gain and Phase Match Between Amplifiers
- Designed To Be Interchangeable With Raytheon RC4136, RM4136, and RV4136
- Low Noise . . . 8 nV $\sqrt{\text{Hz}}$ Typ at 1 kHz


description

The RC4136, RM4136, and RV4136 are quad general-purpose operational amplifiers with each amplifier electrically similar to the μA741 except that offset null capability is not provided.


The high common-mode input voltage range and the absence of latch-up make these amplifiers ideal for voltage-follower applications. The devices are short circuit protected and the internal frequency compensation ensures stability without external components.

The RC4136 is characterized for operation from 0°C to 70°C, the RM4136 is characterized for operation over the full military temperature range of -55°C to 125°C, and the RV4136 is characterized for operation from -40°C to 85°C.

RM4136 . . . J OR W PACKAGE
ALL OTHERS . . . D OR N PACKAGE
(TOP VIEW)




RM4136 . . . FK PACKAGE
(TOP VIEW)

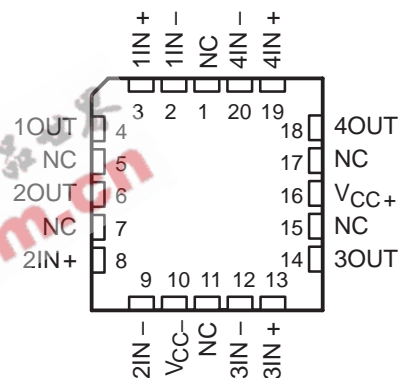

NC – No internal connection

symbol (each amplifier)

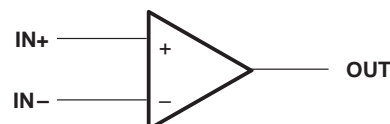

AVAILABLE OPTIONS

| T _A | V _{IOmax} AT 25°C | PACKAGE | | | | |
|----------------|-------------------------------|----------------------|----------------------|--------------------|--------------------|-------------|
| | | SMALL OUTLINE (D) | CHIP CARRIER (FK) | CERAMIC DIP (J) | PLASTIC DIP (N) | FLAT (W) |
| 0°C to 70°C | 6 mV | RC4136D | — | — | RC4136N | — |
| -40°C to 85°C | 6 mV | RV4136D | — | — | RV4136N | — |
| -55°C to 125°C | 4 mV | — | RM4136FK | RM4136J | — | RM4136W |

The D packages are available taped and reeled. Add the suffix R to the device type (e.g., RC4136DR).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**


POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1990, Texas Instruments Incorporated
On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

RC4136, RM4136, RV4136 QUAD GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

SLOS072 – MARCH 1978 – REVISED SEPTEMBER 1990

schematic (each amplifier)

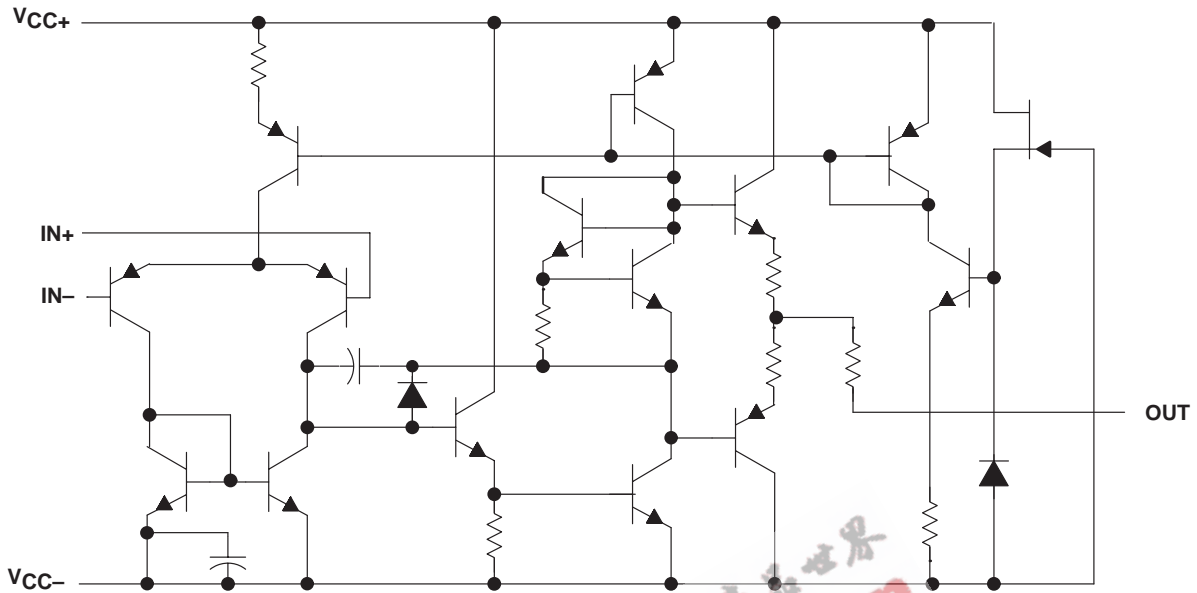

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

| | RC4136 | RM4136 | RV4136 | UNIT |
|--|------------------------------|----------------|------------|--------------------|
| Supply voltage V_{CC+} (see Note 1) | 18 | 22 | 18 | V |
| Supply voltage V_{CC-} (see Note 1) | -18 | -22 | -18 | V |
| Differential input voltage (see Note 2) | ± 30 | ± 30 | ± 30 | V |
| Input voltage (any input, see Notes 1 and 3) | ± 15 | ± 15 | ± 15 | V |
| Duration of output short circuit to ground, one amplifier at a time (see Note 4) | unlimited | unlimited | unlimited | |
| Continuous total dissipation | See Dissipation Rating Table | | | |
| Operating free-air temperature range | 0 to 70 | -55 to 125 | -40 to 85 | $^{\circ}\text{C}$ |
| Storage temperature range | -65 to 150 | -65 to 150 | -65 to 150 | $^{\circ}\text{C}$ |
| Case temperature for 60 seconds | | FK package | — | $^{\circ}\text{C}$ |
| Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds | | J or W package | 300 | $^{\circ}\text{C}$ |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds | | D or N package | 260 | $^{\circ}\text{C}$ |

- NOTES: 1. All voltage values, unless otherwise noted, are with respect to the midpoint between V_{CC+} and V_{CC-} .
 2. Differential voltages are at IN+ with respect to IN- .
 3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 V, whichever is less.
 4. Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.

DISSIPATION RATING TABLE

| PACKAGE | $T_A \leq 25^{\circ}\text{C}$ POWER RATING | DERATING FACTOR | DERATE ABOVE T_A | $T_A = 70^{\circ}\text{C}$ POWER RATING | $T_A = 85^{\circ}\text{C}$ POWER RATING | $T_A = 125^{\circ}\text{C}$ POWER RATING |
|---------|---|-----------------------------|-----------------------|--|--|---|
| D | 800 mW | 7.6 mW/ $^{\circ}\text{C}$ | 45 $^{\circ}\text{C}$ | 608 mW | 494 mW | — |
| FK | 800 mW | 11.0 mW/ $^{\circ}\text{C}$ | 77 $^{\circ}\text{C}$ | 800 mW | 715 mW | 275 mW |
| J | 800 mW | 11.0 mW/ $^{\circ}\text{C}$ | 77 $^{\circ}\text{C}$ | 800 mW | 715 mW | 275 mW |
| N | 800 mW | 9.2 mW/ $^{\circ}\text{C}$ | 63 $^{\circ}\text{C}$ | 736 mW | 598 mW | — |
| W | 800 mW | 8.0 mW/ $^{\circ}\text{C}$ | 50 $^{\circ}\text{C}$ | 640 mW | 520 mW | 200 mW |

RC4136, RM4136, RV4136 QUAD GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

SLOS072 – MARCH 1978 – REVISED SEPTEMBER 1990

recommended operating conditions

| | MIN | MAX | UNIT |
|---------------------------|-----|-----|------|
| Supply voltage, V_{CC+} | 5 | 15 | V |
| Supply voltage, V_{CC-} | -5 | -15 | V |

electrical characteristics at specified free-air temperature, $V_{CC+} = 15\text{ V}$, $V_{CC-} = -15\text{ V}$

| PARAMETER | TEST CONDITION [†] | RC4136 | | | RM4136 | | | RV4136 | | | UNIT |
|--|---|------------|------|--------|--------|--------|------|--------|-----------------------|-----|------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| V_{IL} Input offset voltage | $V_O = 0$ | 25°C | 0.5 | 6 | 0.5 | 4 | 0.5 | 6 | mV | | |
| | | Full range | | 7.5 | | 6 | | 7.5 | | | |
| I_{IO} Input offset current | $V_O = 0$ | 25°C | 5 | 200 | 5 | 1.50 | 5 | 200 | nA | | |
| | | Full range | | 300 | | 500 | | 500 | | | |
| I_{IB} Input bias current | $V_O = 0$ | 25°C | 140 | 500 | 140 | 400 | 140 | 500 | nA | | |
| | | Full range | | 800 | | 1500 | | 1500 | | | |
| V_i Input voltage range | | 25°C | ±12 | ±14 | ±12 | ±14 | ±12 | ±14 | V | | |
| V_{OM} Maximum peak output voltage swing | $R_L = 10\text{ k}\Omega$ | 25°C | ±12 | ±14 | ±12 | ±14 | ±12 | ±14 | V | | |
| | $R_L = 2\text{ k}\Omega$ | 25°C | ±10 | ±13 | ±10 | ±13 | ±10 | ±13 | | | |
| | $R_L \geq 2\text{ k}\Omega$ | Full range | ±10 | | ±10 | | ±10 | | | | |
| A_{VD} Large-signal differential voltage amplification | $V_O = \pm 10\text{ V}$, $R_L \geq 2\text{ k}\Omega$ | 25°C | 20 | 300 | 50 | 350 | 20 | 300 | V/mV | | |
| | | Full range | 15 | | 25 | | 15 | | | | |
| B_1 Unity-gain bandwidth | | 25°C | 3 | | 3.5 | | 3 | MHz | | | |
| r_i Input resistance | | 25°C | 0.3* | 5 | 0.3* | 5 | 0.3* | 5 | M Ω | | |
| CMRR Common-mode rejection ratio | $V_O = 0$, $R_S = 50\ \Omega$ | 25°C | 70 | 90 | 70 | 90 | 70 | 90 | dB | | |
| k_{SVS} Supply voltage sensitivity ($\Delta V_{IO}/\Delta V_{CC}$) | $V_{CC} = \pm 9\text{ V to } \pm 15\text{ V}$, $V_O = 0$ | 25°C | | 30 150 | | 30 150 | | 30 150 | $\mu\text{V/V}$ | | |
| V_n Equivalent input noise voltage (closed-loop) | $A_{VD} = 100$, BW = 1 Hz, f = 1 kHz, $R_S = 100\ \Omega$ | 25°C | | 8 | | 8 | | 8 | nV $\sqrt{\text{Hz}}$ | | |
| I_{CC} Supply current (all four amplifiers) | $V_O = 0$, No load | 25°C | 5 | 11.3 | 5 | 11.3 | 5 | 11.3 | mA | | |
| | | MIN T_A | 6 | 13.7 | 6 | 13.3 | 6 | 13.7 | | | |
| | | MAX T_A | 4.5 | 10 | 4.5 | 10 | 4.5 | 10 | | | |
| P_D Total power dissipation (all four amplifiers) | $V_O = 0$, No load | 25°C | 150 | 340 | 150 | 340 | 150 | 340 | mW | | |
| | | MIN T_A | 180 | 400 | 180 | 400 | 180 | 400 | | | |
| | | MAX T_A | 135 | 300 | 135 | 300 | 135 | 300 | | | |
| Crosstalk attenuation (V_{O1}/V_{O2}) | $A_{VD} = 100$, f = 10 kHz, $R_S = 1\text{ k}\Omega$ | 25°C | | 105 | | 105 | | 105 | dB | | |

* This parameter is not production tested.

[†] All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified. Full range is 0°C to 70°C for RC4136, -55°C to 125°C for RM4136, and -40°C to 85°C for RV4136. Minimum T_A is 0°C for RC4136, -55°C for RM4136, and -40°C for RV4136. Maximum T_A is 70°C for RC4136, 125°C for RM4136, and 85°C for RV4136.

RC4136, RM4136, RV4136 QUAD GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

SLOS072 – MARCH 1978 – REVISED SEPTEMBER 1990

operating characteristics, $V_{CC+} = 15\text{ V}$, $V_{CC-} = -15\text{ V}$, $T_A = 25^\circ\text{C}$

| PARAMETER | | TEST CONDITIONS | RC4136, RV4136 | | | RM4136 | | | UNIT |
|-----------|-------------------------|--|----------------|-----|-----|--------|-----|-----|------------------------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| t_r | Rise time | $V_I = 20\text{ mV}$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$ | 0.13 | | | 0.13 | | | μs |
| | Overshoot factor | | 5% | | | 5% | | | |
| SR | Slew rate at unity gain | $V_I = 10\text{ V}$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$ | 1.7 | | | 1.7 | | | $\text{V}/\mu\text{s}$ |

EEPW 电子產品世界 .com.cn

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.