

SM6004/SM6006

16-Bit Single-Chip Microcomputers

FEATURES

- ROM capacity:
 - $61,440 \times 8\text{-bits}$ (SM6004)
 - $126,976 \times 8\text{-bits}$ (SM6006)
- RAM capacity:
 - $2,048 \times 8\text{-bits}$ (SM6004)
 - $3,584 \times 8\text{-bits}$ (SM6006)
- External memory expansion function
 - On chip bus controller for external memory
 - Bus multiplexing/nonmultiplexing selection
 - Bus width selection
 - Auto wait control
- CPU
 - General purpose registers $16\text{-bit} \times 16$
 - 62 basic instructions (bit manipulation instructions
Suitable for controlling, bit transfer instructions, bit branch
instructions, high speed multiplication and division instruc-
tions ($16\text{-bits} \times 16\text{-bits}$, $16\text{-bits} \div 16\text{-bits}$, $32\text{-bits} \div 16\text{-bits}$))
- 10 addressing modes
 - 16M of address space
 - An interrupt request starts a high performance automatic data transfer (DTS). Appropriate settings of interrupts and registers enable hardware automatic data transfer. Various functions can be operated successively and the resultant data can also successively be stored.
 - System clock cycle $0.133 \mu\text{s}$ (MIN.)
($V_{DD} = 4.5 \text{ V to } 5.5 \text{ V}$ at 30 MHz main clock cycle)
 - $0.2 \mu\text{s}$ (MIN.)
($V_{DD} = 2.5 \text{ V to } 5.5 \text{ V}$ at 20 MHz main clock cycle)
 - Selectable system clocks divided by 2 up to 16 main clocks for low power operation.
- 27 total software interrupts
 - 24 maskable interrupts (external 4, internal 20)
 - 3 nonmaskable interrupts
 - A nonmaskable interrupt, when used in conjunction with BST instruction, can trigger the software reset

APPLICATIONS:

- PDA
- Digital Camera

- Built-in main clock oscillator for system clock
- Standby function: Halt mode/stop mode
- I/O ports $\times 88$ /specific purpose function pin $\times 3$
 - Input ports $\times 8$ (also serve as A/D input)
 - I/O ports $\times 80$ (also serve as function pins)
 - Specific purpose function pins $\times 3$ (D/A output pin $\times 2$, bus mode selection pin $\times 1$)
- Timer
 - 16-bit multifunction timers $\times 6$
 - 5-stage capture and 2-stage compare type $\times 1$
 - 1-stage compare type $\times 2$
 - 2-stage capture type (or capture and compare) $\times 2$
 - 2-stage compare, PWM output type $\times 1$
- Watchdog timer (overrun detect timer): 8-bit $\times 1$
- Serial interface
 - Selectable universal asynchronous receiver transmitter (UART)/serial I/O interface (SIO) $\times 2$
 - Serial I/O interface (SIO) $\times 1$
- A/D converter
 - Resolution 10-bits
 - 8 channels
 - Auto start by triggering with timer output
- D/A converter 8-bit $\times 2$
- High precision PWM outputs
 - 14-bit $\times 2$
 - Bit modulated PWM
- Real time outputs 4-bit $\times 2$
- Supply voltages
 - 4.5 V to 5.5 V (main clock at 30 MHz)
 - 2.5 V to 5.5 V (main clock at 20 MHz)
- Packages
 - 100-pin LQFP (LQFP100-P-1414)
 - 100-pin QFP (QFP100-P-1420)


DESCRIPTION

The SM6004/SM6006 are single-bit single-chip microcomputers incorporating a 16-bit CPU core, ROM, RAM, timer unit, watchdog timer, serial interface (UART, SIO), PWM output, real time output, A/D converter, D/A converter and bus controller.

PRODUCT INFORMATION

SHARP®


100-PIN LQFP PINOUT

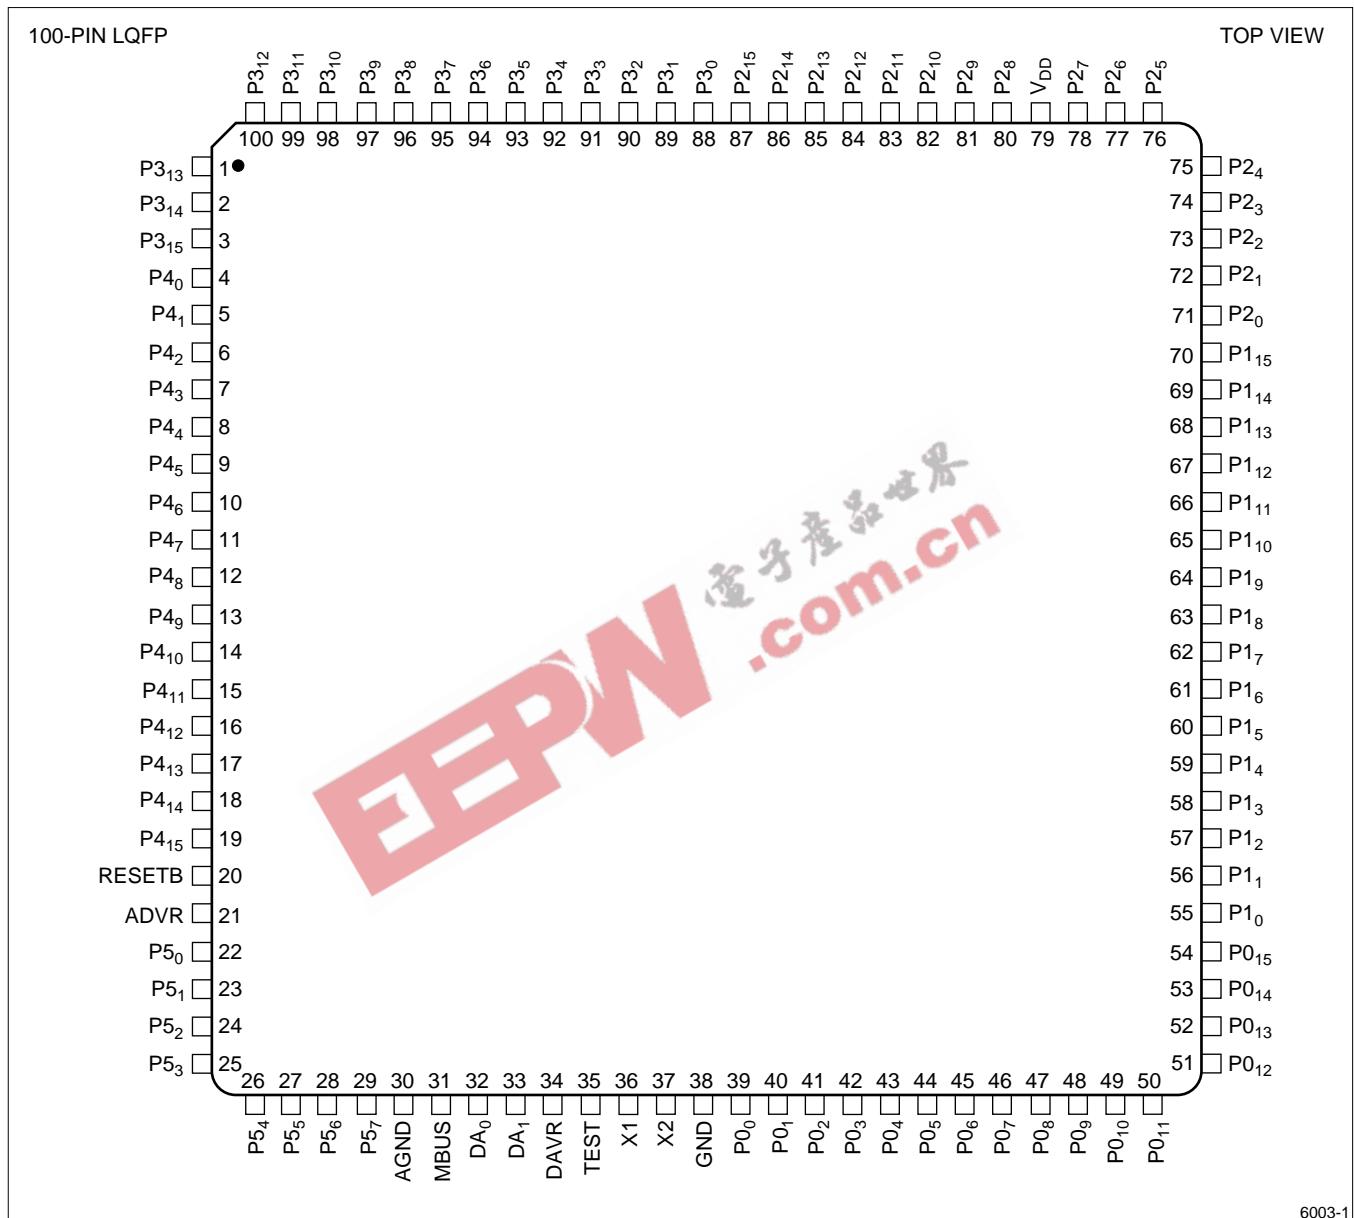

PRODUCT INFORMATION

SHARP®

100-PIN QFP PINOUT

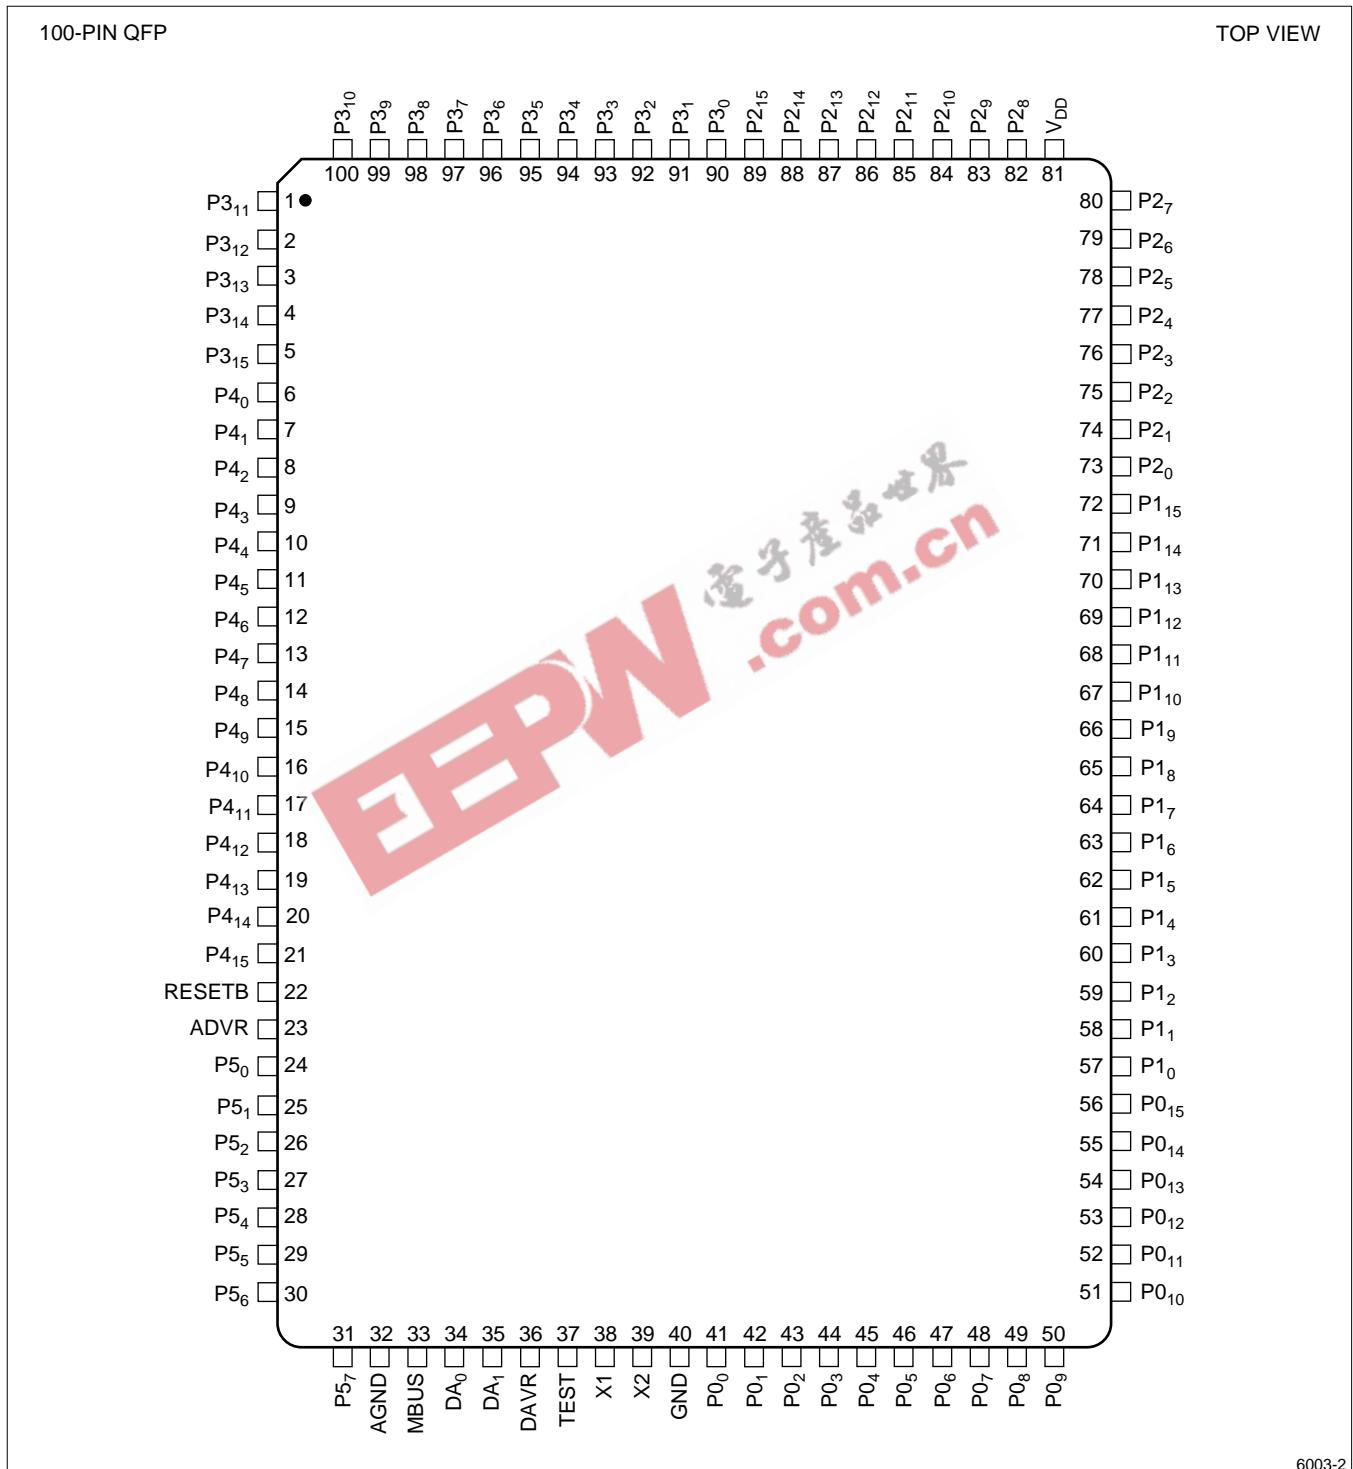

6003-2