
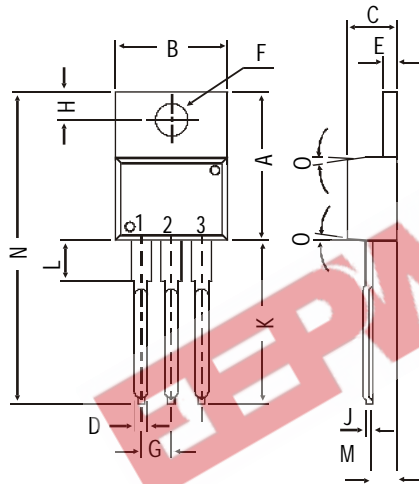


TO-220 Plastic Package

**TIP120, TIP121, TIP122
TIP125, TIP126, TIP127**

*TIP120, 121, 122 NPN PLASTIC POWER TRANSISTORS
TIP125, 126, 127 PNP PLASTIC POWER TRANSISTORS
Power Darlingtons for Linear and Switching Applications*

PIN CONFIGURATION
1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR



DIM	MIN.	MAX.
A	14.42	16.51
B	9.63	10.67
C	3.56	4.83
D		0.90
E	1.15	1.40
F	3.75	3.88
G	2.29	2.79
H	2.54	3.43
J		0.56
K	12.70	14.73
L	2.80	4.07
M	2.03	2.92
N		31.24
O	DEG 7	

All dimensions in mm.

ABSOLUTE MAXIMUM RATINGS

		120	121	122	
		125	126	127	
Collector-base voltage (open emitter)	V_{CBO} max.	60	80	100	V
Collector-emitter voltage (open base)	V_{CEO} max.	60	80	100	V
Collector current	I_C max.		5.0		A
Total power dissipation up to $T_C = 25^\circ C$	P_{tot} max.		65		W
Junction temperature	T_j max.		150		$^\circ C$
Collector-emitter saturation voltage	V_{CEsat} max.		2.0		V
$I_C = 3 A; I_B = 12 mA$					
D.C. current gain	h_{FE} min.		1.0		
$I_C = 0.5 A; V_{CE} = 3 V$					

RATINGS (at $T_A=25^\circ C$ unless otherwise specified)

		120	121	122	
		125	126	127	
Collector-base voltage (open emitter)	V_{CBO} max.	60	80	100	V
Collector-emitter voltage (open base)	V_{CEO} max.	60	80	100	V
Emitter-base voltage (open collector)	V_{EBO} max.		5.0		V

**TIP120, TIP121, TIP122
TIP125, TIP126, TIP127**

Collector current	I_C	max.	5.0	A
Collector current (peak)	I_{CM}	max.	8	A
Base current	I_B	max.	120	mA
Total power dissipation up to $T_C = 25^\circ\text{C}$	P_{tot}	max.	65	W
Derate above 25°C		max	0.52	W $^\circ\text{C}$
Total power dissipation up to $T_A = 25^\circ\text{C}$	P_{tot}	max.	2	W
Derate above 25°C		max	0.016	W $^\circ\text{C}$
Junction temperature	T_j	max.	150	$^\circ\text{C}$
Storage temperature	T_{stg}		-65 to +150	$^\circ\text{C}$

THERMAL RESISTANCE

From junction to ambient	$R_{th\ j-a}$		62.5	$^\circ\text{C/W}$
From junction to case	$R_{th\ j-c}$		1.92	$^\circ\text{C/W}$

CHARACTERISTICS

$T_{amb} = 25^\circ\text{C}$ unless otherwise specified

			120	121	122
			125	126	127
Collector cutoff current					
$I_E = 0; V_{CB} = 60\text{ V}$	I_{CBO}	max.	0.2	-	- mA
$I_E = 0; V_{CB} = 80\text{ V}$	I_{CBO}	max.	-	0.2	- mA
$I_E = 0; V_{CB} = 100\text{ V}$	I_{CBO}	max.	-	-	0.2 mA
$I_B = 0; V_{CE} = 30\text{ V}$	I_{CEO}	max.	0.5	-	- mA
$I_B = 0; V_{CE} = 40\text{ V}$	I_{CEO}	max.	-	0.5	- mA
$I_B = 0; V_{CE} = 50\text{ V}$	I_{CEO}	max.	-	-	0.5 mA
Emitter cut-off current					
$I_C = 0; V_{EB} = 5\text{ V}$	I_{EBO}	max.		2.0	mA
Breakdown voltages					
$I_C = 100\text{ mA}; I_B = 0$	$V_{CEO(sus)}^*$	min.	60	80	100 V
$I_C = 1\text{ mA}; I_E = 0$	V_{CBO}	min.	60	80	100 V
$I_E = 1\text{ mA}; I_C = 0$	V_{EBO}	min.		5.0	V
Saturation voltages					
$I_C = 3.0\text{ A}; I_B = 12\text{ mA}$	V_{CEsat}^*	max.		2.0	V
$I_C = 5.0\text{ A}; I_B = 20\text{ mA}$	V_{CEsat}^*	max.		4.0	V
Base-emitter on voltage					
$I_C = 3\text{ A}; V_{CE} = 3\text{ V}$	$V_{BE(on)}^*$	max.		2.5	V
D.C. current gain					
$I_C = 0.5\text{ A}; V_{CE} = 3\text{ V}$	h_{FE}^*	min.		1.0	
$I_C = 3\text{ A}; V_{CE} = 3\text{ V}$		min.		1.0	
Small signal current gain					
$I_C = 3\text{ A}; V_{CE} = 4\text{ V}; f = 1\text{ MHz}$	$ h_{fe} $	min.		4.0	
Output capacitance at $f = 0.1\text{ MHz}$					
$I_E = 0; V_{CB} = 10\text{ V}$	PNP C_o	max.		300	pF
	NPN C_o	max.		200	pF

* Pulse test: pulse width $\leq 300\ \mu\text{s}$; duty cycle $\leq 2\%$.