


High Precision Bulk Metal[®] Foil Extended Value Range Resistor, with TCR of 2 ppm/°C, Tolerance to 0.005 %, and Power Rated at 0.6 W



Any value available within resistance range

Bulk Metal[®] foil (BMF) technology outperforms all other resistor technologies available today for applications that require high precision and high stability.

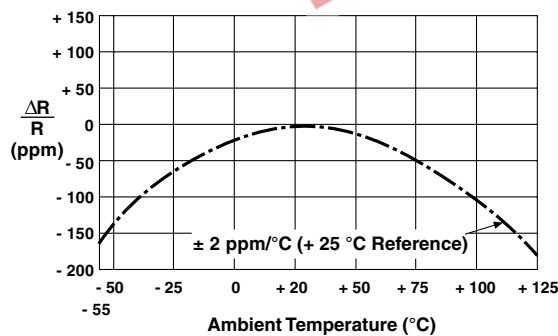
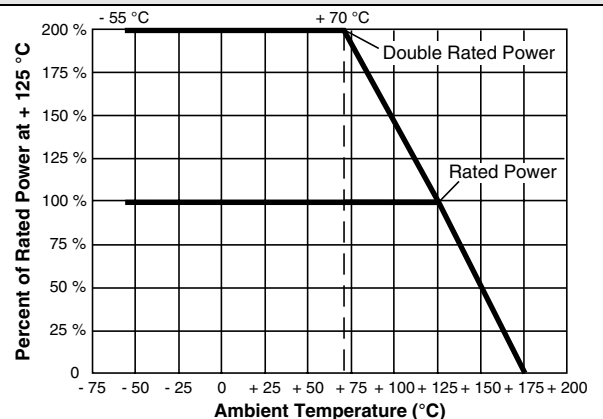
This technology has been pioneered and developed by VISHAY, and products based on this technology are the most suitable for a wide range of applications.

BMF technology allows us to produce customer orientated products, designed to satisfy challenging and specific technical requirements.

The E102C (0.150" lead spacing) and E102J (0.200" lead spacing) extends the range of the high precision aerospace and instrumentation standard S102C/J from 150K to 300K. Our application engineering department is available to advise and to make recommendations. For non-standard technical requirements and special applications, please contact us.

FEATURES

- Temperature coefficient of resistance (TCR):
- 55 °C to + 125 °C, + 25 °C ref.
2 ppm/°C typical
- Rated power: to 0.3 W at + 125 °C
- Tolerance: ± 0.005 %
- Load life stability: to ± 0.005 % at 70 °C, 2000 h at rated power
- Resistance range: 150 kΩ to 300 kΩ (higher and lower values of resistance are available)
- Electrostatic discharge (ESD) above 25 000 V
- Non inductive, non capacitive design
- Rise time: 1 ns without ringing
- Current noise: < - 40 dB
- Thermal EMF: 0.05 μV/°C typical
- Voltage coefficient < 0.1 ppm/V
- Low inductance: < 0.08 μH typical
- Non hot spot design
- Terminal finishes available: lead (Pb)-free tin/lead alloy
- Matched sets are available on request (TCR tracking: to 0.5 ppm/°C)
- For better TCR and PCR performances please review the E102Z datasheet

FIGURE 1 - TYPICAL TCR CURVE

FIGURE 2 - POWER DERATING CURVE

TABLE 1 - E102 SPECIFICATIONS

Stability Load life at 2000 h Load life at 10 000 h	± 0.005 % maximum ΔR at 0.1 W/+ 70 °C ± 0.015 % maximum ΔR at 0.3 W/+ 125 °C ± 0.01 % maximum ΔR at 0.05 W/+ 125 °C ± 0.05 % maximum ΔR at 0.3 W/+ 125 °C
Current Noise	< - 40 dB
High Frequency Operation Rise time Inductance (L) Capacitance (C)	1.0 ns 0.1 μH maximum; 0.08 μH typical 1.0 pF maximum; 0.5 pF typical
Voltage Coefficient	< 0.1 ppm/V
Thermal EMF	0.1 μV/°C maximum; 0.05 μV/°C typical

E102



Vishay Foil Resistors High Precision Bulk Metal® Foil Extended Value Range Resistor, with TCR of $2 \text{ ppm}/^\circ\text{C}$, Tolerance to 0.005% , and Power Rated at 0.6 W

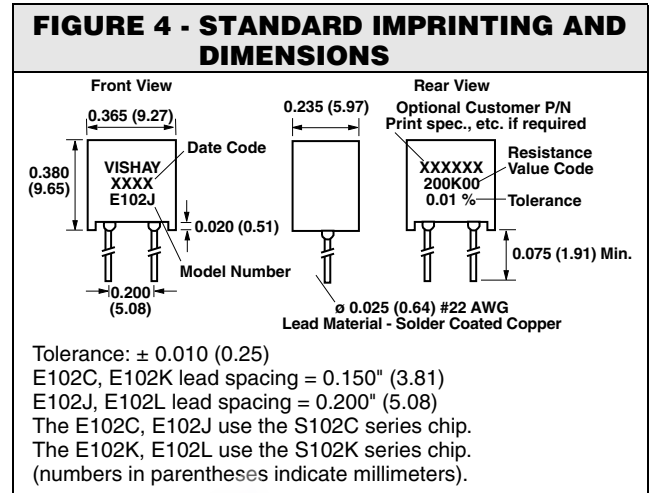
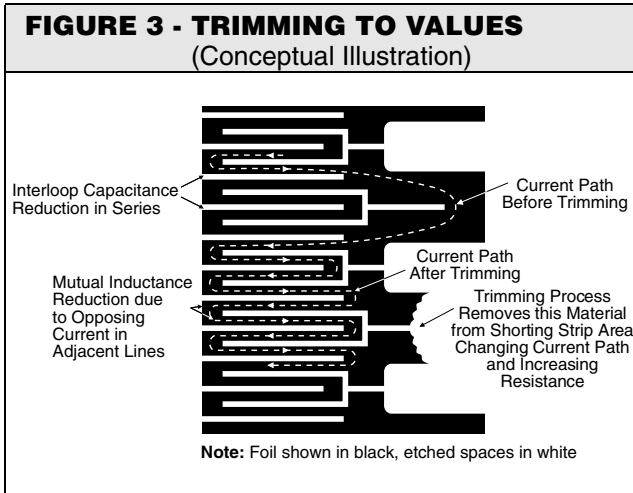


TABLE 2 - GLOBAL PART NUMBER INFORMATION

NEW GLOBAL PART NUMBER: Y1186150K00T9L (preferred part number format)

DENOTES PRECISION Y	VALUE K = k Ω	AER* 0 = standard part, tin/lead termination 9 = standard part, lead (Pb)-free termination 1 - 999 = custom
------------------------	-------------------------	--

Y 1 1 8 6 1 5 0 K 0 0 0 T 9 L

PRODUCT CODE 1186 = E102C 1184 = E102J 1187 = E102K 1185 = E102L	RESISTANCE TOLERANCE V = $\pm 0.005 \%$ T = $\pm 0.01 \%$ Q = $\pm 0.02 \%$ A = $\pm 0.05 \%$ B = $\pm 0.1 \%$ C = $\pm 0.25 \%$ D = $\pm 0.5 \%$ F = $\pm 1.0 \%$	PACKAGING L = bulk pack
--	--	----------------------------

FOR EXAMPLE: ABOVE GLOBAL ORDER Y1186 150K00 T 9 L:
TYPE: E102C
VALUE: 150.0 k Ω
ABSOLUTE TOLERANCE: $\pm 0.01 \%$
TERMINATION: lead (Pb)-free
PACKAGING: bulk pack

HISTORICAL PART NUMBER: E102C T 150K00 T B (will continue to be used)

E102C MODEL E102C E102J E102K E102L	T TERMINATION T = lead (Pb)-free None = tin/lead alloy	150K00 OHMIC VALUE 150K00 = 150.0 k Ω	T RESISTANCE TOLERANCE V = $\pm 0.005 \%$ T = $\pm 0.01 \%$ Q = $\pm 0.02 \%$ A = $\pm 0.05 \%$ B = $\pm 0.1 \%$ C = $\pm 0.25 \%$ D = $\pm 0.5 \%$ F = $\pm 1.0 \%$	B PACKAGING B = bulk pack
--	---	--	---	---------------------------------

Note

* Application engineering release: for non-standard requests, please contact application engineering.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

EEPW.com