


NOTE(1):
020169MR004□□03ZL

- 1 2
- No. of pins.
 - Plating
 - 'G1,-05u" gold over nickel.
 - 'G2,-Indicate gold flash.
 - 'G3,-10u" gold over nickel.
 - 'G4,-15u" gold over nickel.
 - 'G5,-30u" gold over nickel.
 - 'S1,-05u" Min. gold in contact area/
100u" Min. Tin in solder area.
 - 'S2,-Gold flash in contact area/
100u" Min. Tin in solder area.
 - 'S3,-10u" Min. gold in contact area/
100u" Min. Tin in solder area.
 - 'S4,-15u" Min. gold in contact area/
100u" Min. Tin in solder area.
 - 'S5,-30u" Min. gold in contact area/
100u" Min. Tin in solder area.

Recommended P.C.B Layout

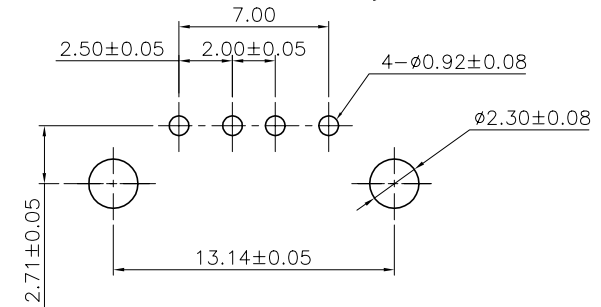

3	Shell	Pho. Bronze	_____	Nickel Plated
2	Terminal	Pho. Bronze	_____	Selective Gold/Tin
1	Plastics	NY-6T	BLACK	UL94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

實盈 **SUYIN**
CONNECTOR

名稱	USB CONNECTOR R/A DIP TYPE, Series A.			
料號 PART NO.	020169MR004xx03ZL			
料號 PART NO. (OLD)	_____			
圖號 DRAWING NO.	D	020169MR004xx03ZL		
SCALE	4:1	UNIT	mm	A4

					Angle	±1°													
					30 ~	±0.30				DRAW	繪圖員								
					10 ~ 30	±0.20				DESIGN	設計								
					~ 10	±0.10				CHECK	校閱								
工程變更通知單號 ECN(DCN) NO.	0	日期 DATE	NEW(Ref. from: 2569AR-04GXX)	說明 DESCRIPTION	改變 CHANGE	承認 APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED			APPRO.	承認								