

No.4625

2SA1815

PNP Epitaxial Planar Silicon Transistor FM, RF, MIX, IF Amp, High-Frequency General-Purpose Amp Applications

Features

- · High power gain : PG = 25dB typ (f = 100MHz)
- · High cutoff frequency: $f_T = 750MHz$ typ
- · Low collector-to-emitter saturation voltage.
- · Complementary pair with the 2SC4432.

Absolute Maximum Ratings at Ta = 25°C

Collector to Base Voltage	V_{CBO}
Collector to Emitter Voltage	V_{CEO}
Emitter to Base Voltage	V_{EBO}
Collector Current	$I_{\mathbf{C}}$
Collector Dissipation	$P_{\mathbf{C}}$
Junction Temperature	Tj
Storage Temperature	Tstg

-15	V
-12	V
-3	V
-50	mΑ
250	mW
150	°C

-55 to +150

unit

Electrical Characteristics at Ta = 25°C


Electrical Characteristics at 1	.a=25°C	mı mı	ın typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = -12V, I_E = 0$		-0.1	μ A
Emitter Cutoff Current	I_{EBO}	$V_{EB} = -2V, I_C = 0$		-0.1	μ A
DC Current Gain	${ m h_{FE}}$	$V_{CE} = -10V, I_C = -5mA$	30 %	270	K .
Gain-Bandwidth Product	$\mathbf{f_T}$	$V_{CE} = -10V, I_{C} = -5mA$	750		MHz
Output Capacitance	Cob	$V_{CB} = -10V$, $f = 1MHz$	1.2	1.6	pF
Reverse Transfer Capacitance	e Cre	$V_{CB} = -10V$, $f = 1MHz$	0.9		рF
C-E Saturation Voltage	$V_{\rm CE(sat)}$	$I_C = -10 \text{mA}, I_B = -1 \text{mA}$	-0.1	-0.3	v
Power Gain	PG	$V_{CE} = -10V, I_{C} = -10mA, f = 100MHz$	25		dB

X The 2SA1815 is classified by 5mA hFE as follows:

60 3 120	90 4 180	135 5 270

Marking: JS h_{FE} rank: 3, 4, 5

PG Test Circuit

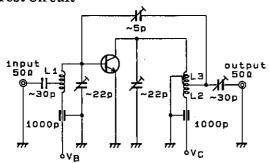



Unit (Capacitance : F)

A01861

- L1:1mmø plated wire 10mmø 5T, pitch 15mm, tap: 2T from base side
- L2:1mmø plated wire 10mmø 7T, pitch 10mm, tap:2T from V_C side
- L3:1mmø enamel wire 10mmø 3T, pitch 10mm

Package Dimensions 2018A

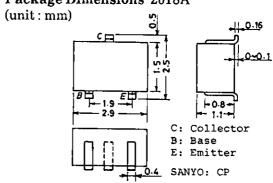

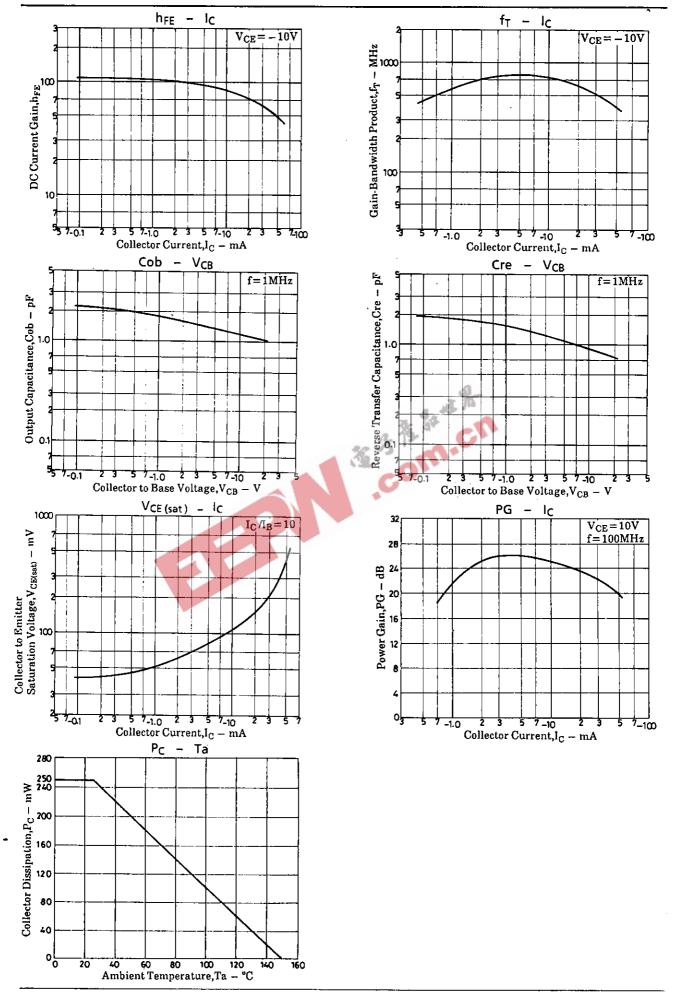



- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.