

SANYO	No.3159A	2SA1724
		PNP Epitaxial Planar Silicon Transistor High-Definition CRT Display Video Output Driver Applications

Features

- High f_T ($f_T = 1.5\text{GHz}$ typ).
- High current ($I_C = 300\text{mA}$).
- Adoption of FBET process.

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Collector-to-Base Voltage	V_{CB0}	-30	V	
Collector-to-Emitter Voltage	V_{CEO}	-20	V	
Emitter-to-Base Voltage	V_{EBO}	-3	V	
Collector Current	I_C	-300	mA	
Collector Current(Pulse)	I_{CP}	-600	mA	
Collector Dissipation	P_C	500	mW	
		Mounted on ceramic board ($250\text{mm}^2 \times 0.8\text{mm}$)		1.3
Junction Temperature	T_j	150	$^\circ\text{C}$	
Storage Temperature	T_{stg}	-55 to +150	$^\circ\text{C}$	


Electrical Characteristics at $T_a = 25^\circ\text{C}$

			min	typ	max	
Collector Cutoff Current	I_{CB0}	$V_{CB} = -20\text{V}, I_E = 0$			-0.1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = -2\text{V}, I_C = 0$			-1.0	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE} = -5\text{V}, I_C = -50\text{mA}$	15		100	
	$h_{FE(2)}$	$V_{CE} = -5\text{V}, I_C = -300\text{mA}$	5			
Gain-Bandwidth Product	f_T	$V_{CE} = -5\text{V}, I_C = -100\text{mA}$		1.5		GHz
Output Capacitance	C_{ob}	$V_{CB} = -10\text{V}, f = 1\text{MHz}$		4.9		pF
Reverse Transfer Capacitance	C_{re}	$V_{CB} = -10\text{V}, f = 1\text{MHz}$		4.4		pF
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C = -100\text{mA}, I_B = -10\text{mA}$		-0.4	-1.0	V
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C = -100\text{mA}, I_B = -10\text{mA}$		-0.9	-1.2	V

Marking : AJ









Package Dimensions 2038A


(unit : mm)

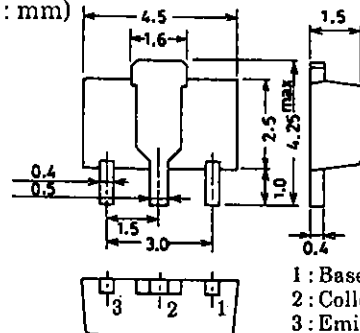

1 : Base
2 : Collector
3 : Emitter
(Bottom View)

SANYO : PCP

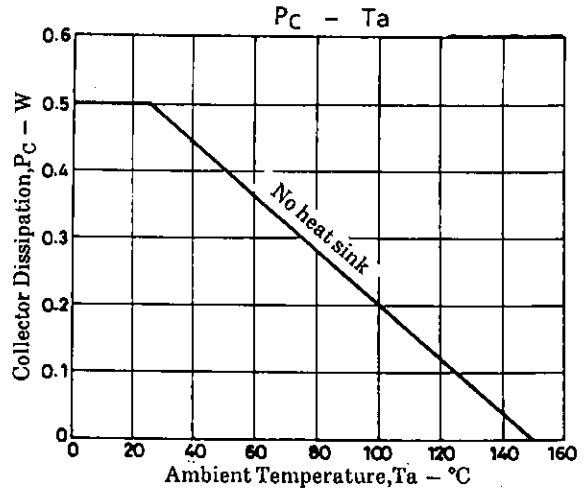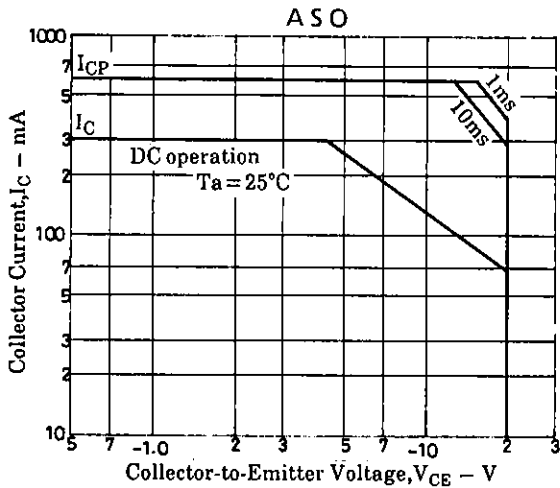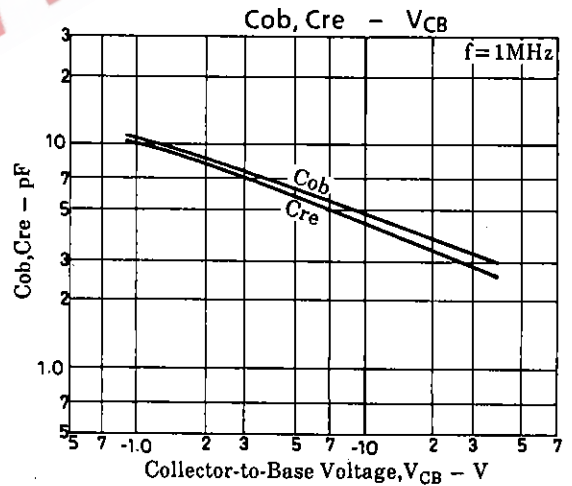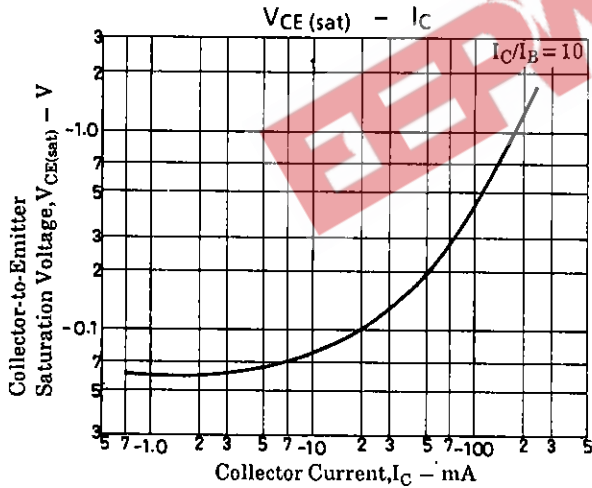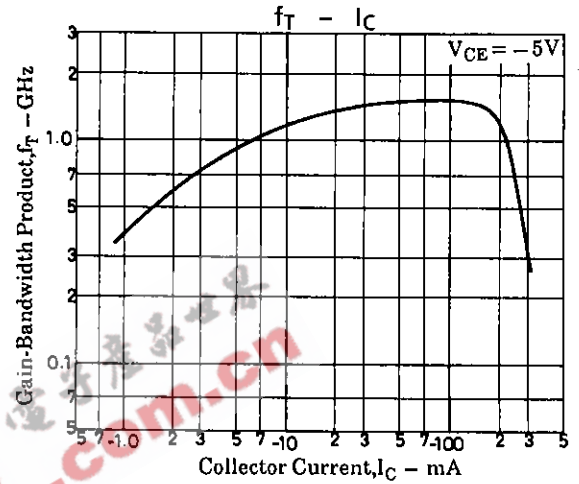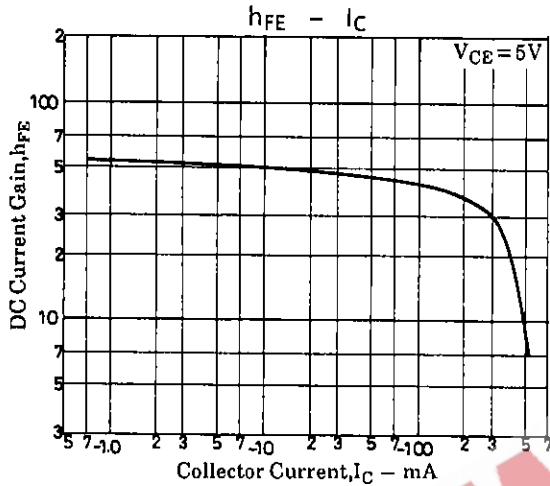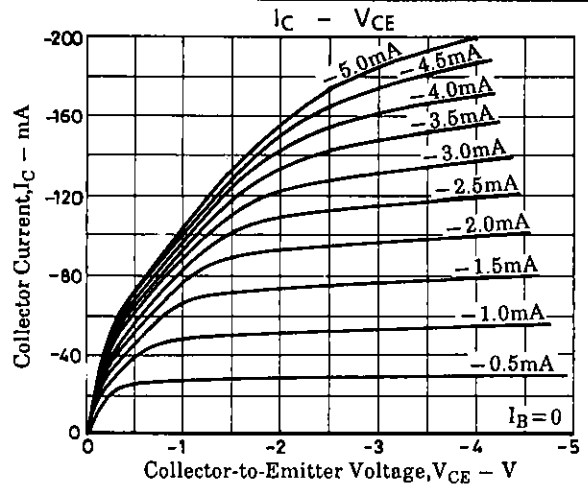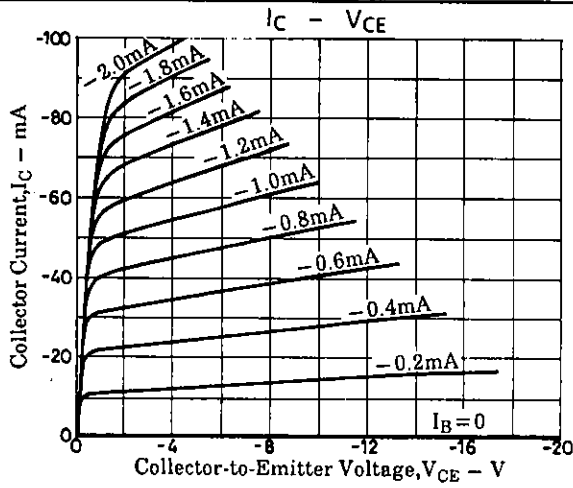

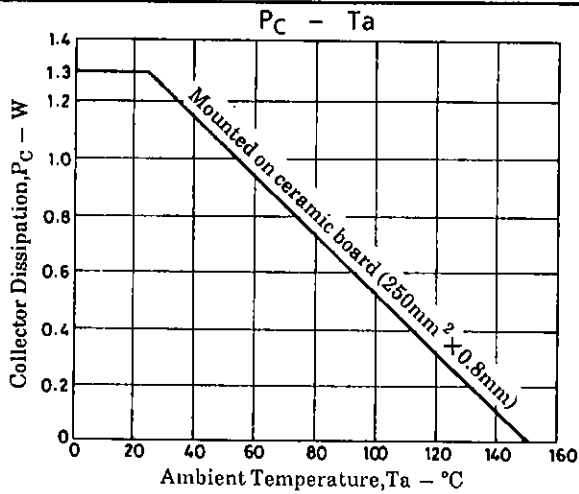

EFPW.com.cn 电子产品世界

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.