



T-1 Subminiature Lamps

| Line No. | Part No. Wire Lead | Part No. Miniature Flanged | Part No. Bi-Pin | Volts | Amps | M.S.C.P. | Filament Type | Life Hours |
|----------|--------------------|----------------------------|-----------------|-------|-------|----------|---------------|------------|
| 17 | 8798 | 7244 | 7252 | 1.25 | 0.012 | 0.004 | C-6 | 1,000 |
| 18 | 8910 | 7245 | 7253 | 1.35 | 0.220 | 0.02 | C-2R | 10,000 |
| 19 | 7200 | 7225 | 3225 | 1.5 | 0.010 | 0.002 | C-2R | 2,000 |
| 20 | 7201 | 7226 | 7254 | 1.5 | 0.015 | 0.005 | C-2R | 1,000 |
| 21 | 7203 | 8102 | 7255 | 1.5 | 0.075 | 0.03 | C-2R | 16,000 |
| 22 | 801 | — | — | 2.4 | 0.145 | 0.18 | C-2R | 3,000 |
| 23 | 8601 | 7246 | 7256 | 2.5 | 0.015 | 0.001 | C-2R | 10,000 |
| 24 | 8732 | 7247 | 7732 | 2.5 | 0.100 | 0.10 | C-2R | 10,000 |
| 25 | 8711 | 7248 | 7257 | 2.5 | 0.320 | 0.21 | C-2R | 5,000 |
| 26 | 8846 | 7249 | 7258 | 3.0 | 0.008 | 0.001 | C-2R | 16,000 |
| 27 | 7205 | 7229 | 3229 | 3.0 | 0.015 | 0.02 | C-2R | 5,000 |
| 28 | 7207 | 7231 | 7260 | 3.0 | 0.060 | 0.03 | C-2R | 100,000 |
| 29 | 7208 | 7232 | 7261 | 3.0 | 0.120 | 0.15 | C-2R | 16,000 |
| 30 | 8602 | 8605 | 7262 | 5.0 | 0.017 | 0.005 | C-2R | 10,000 |
| 31 | 6022 | 8022 | 7022 | 5.0 | 0.021 | 0.034 | C-2R | 10,000 |
| 32 | 7210 | 7234 | 7263 | 5.0 | 0.030 | 0.03 | C-2R | 16,000 |
| 33 | 8729 | 7250 | 7264 | 5.0 | 0.045 | 0.04 | C-2R | 10,000 |
| 34 | 680 | 682 | 7680 | 5.0 | 0.060 | 0.03 | C-2R | 100,000 |
| 35 | 683 | 685 | 7683 | 5.0 | 0.060 | 0.05 | C-2R | 100,000 |
| 36 | 6150 | 6180 | 7265 | 5.0 | 0.060 | 0.15 | C-2R | 5,000 |
| 37 | 713 | 714 | 7714 | 5.0 | 0.075 | 0.09 | C-2R | 25,000 |
| 38 | 7211 | 7235 | 7266 | 5.0 | 0.080 | 0.16 | C-2R | 3,000 |
| 39 | 715 | 718 | 7715 | 5.0 | 0.115 | 0.15 | C-2R | 40,000 |
| 40 | 7213 | 7236 | 7267 | 5.0 | 0.115 | 0.20 | C-2R | 5,000 |
| 41 | 7216 | 7239 | 7268 | 5.0 | 0.125 | 0.22 | C-2R | 5,000 |
| 42 | 8096 | 7251 | 7269 | 5.0 | 0.145 | 0.16 | C-2R | 10,000 |
| 43 | 7218 | 7240 | 8095 | 10.0 | 0.027 | 0.10 | C-2F | 10,000 |
| 44 | — | 228 | — | 12.0 | 0.040 | 0.13 | — | 10,000 |
| 45 | 7219 | 32 | 8097 | 12.0 | 0.060 | 0.15 | C-2F | 16,000 |
| 46 | 8111 | 8112 | 8098 | 14.0 | 0.065 | 0.15 | C-2F | 16,000 |
| 47 | 7220 | 7241 | 8099 | 18.0 | 0.026 | 0.15 | C-2F | 16,000 |
| 48 | 6838 | 6839 | 7839 | 28.0 | 0.024 | 0.15 | CC-2F | 16,000 |


T-¾ Bi-Pin



T-1 Wire Lead





T-1 Miniature Flanged



T-1 Bi-Pin

T-1 Subminiature Short Type Lamps

| Line No. | Part No. | Volts | Amps | M.S.C.P. | Filament Type | Life Hours | Drawing |
|----------|----------|-------|-------|----------|---------------|------------|---------|
| 1 | 6802 | 5.0 | 0.060 | 0.03 | C-2R | 200,000 | A |
| 2 | 6802AS15 | 5.0 | 0.060 | 0.03 | C-2R | 200,000 | A |
| 3 | 6832 | 5.0 | 0.060 | 0.05 | C-2R | 100,000 | A |
| 4 | 6832AS15 | 5.0 | 0.060 | 0.05 | C-2R | 100,000 | A |
| 5 | 7132 | 5.0 | 0.075 | 0.09 | C-2R | 40,000 | A |
| 6 | 7132AS15 | 5.0 | 0.075 | 0.09 | C-2R | 40,000 | A |
| 7 | 7152 | 5.0 | 0.115 | 0.15 | C-2R | 40,000 | A |
| 8 | 7152AS15 | 5.0 | 0.115 | 0.15 | C-2R | 40,000 | A |
| 9 | 7009 | 28.0 | 0.020 | 0.15 | CC-2F | 16,000 | A |

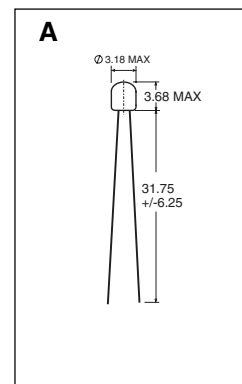

T-1 Mini-Max Flashlight Lamps

| Line No. | Part No. | Volts | Amps | M.S.C.P. | Life Hours | Filament Type | Base Type | Drawing |
|----------|----------|-------|-------|----------|------------|---------------|-----------|---------|
| 10 | L135 | 1.35 | 0.315 | 0.16 | 4 | C-6 | Bi-Pin | B |
| 11 | L250 | 2.5 | 0.300 | 0.6 | 4 | C-6 | Bi-Pin | B |
| 12 | L400 | 4.0 | 0.300 | 1.2 | 4 | C-2R | Bi-Pin | B |