

# BZX85C3V3RL Series

## 1 Watt DO-41 Hermetically Sealed Glass Zener Voltage Regulators

This is a complete series of 1 Watt Zener diodes with limits and excellent operating characteristics that reflect the superior capabilities of silicon-oxide passivated junctions. All this in an axial-lead hermetically sealed glass package that offers protection in all common environmental conditions.

### Specification Features:

- Zener Voltage Range – 3.3 V to 85 V
- ESD Rating of Class 3 (>16 KV) per Human Body Model
- DO-41 (DO-204AL) Package
- Double Slug Type Construction
- Metallurgical Bonded Construction
- Oxide Passivated Die

### Mechanical Characteristics:

**CASE:** Double slug type, hermetically sealed glass

**FINISH:** All external surfaces are corrosion resistant and leads are readily solderable

**MAXIMUM LEAD TEMPERATURE FOR SOLDERING PURPOSES:** 230°C, 1/16" from the case for 10 seconds

**POLARITY:** Cathode indicated by polarity band

**MOUNTING POSITION:** Any


### MAXIMUM RATINGS

| Rating   | Symbol         | Value          | Unit  |
|--|----------------|----------------|-------|
| Max. Steady State Power Dissipation<br>@ $T_L \leq 50^\circ\text{C}$ , Lead Length = 3/8"<br>Derate above 50°C | $P_D$          | 1              | W     |
|  |                | 6.67           | mW/°C |
| Operating and Storage<br>Temperature Range   | $T_J, T_{stg}$ | -65 to<br>+200 | °C    |




ON Semiconductor™

<http://onsemi.com>



AXIAL LEAD  
CASE 59  
GLASS

### MARKING DIAGRAM



L = Assembly Location  
BZX85Cxxx = Device Code  
(See Table Next Page)  
Y = Year  
WW = Work Week

### ORDERING INFORMATION


| Device       | Package    | Shipping         |
|--------------|------------|------------------|
| BZX85CxxxRL  | Axial Lead | 6000/Tape & Reel |
| BZX85CxxxRL2 | Axial Lead | 6000/Tape & Reel |

\* The "2" suffix refers to 26 mm tape spacing.

## BZX85C3V3RL Series

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted,  $V_F = 1.2\text{ V Max.}$ ,  $I_F = 200\text{ mA}$  for all types)

| Symbol   | Parameter                                |
|----------|--|
| $V_Z$    | Reverse Zener Voltage @ $I_{ZT}$         |
| $I_{ZT}$ | Reverse Current                          |
| $Z_{ZT}$ | Maximum Zener Impedance @ $I_{ZT}$       |
| $I_{ZK}$ | Reverse Current                          |
| $Z_{ZK}$ | Maximum Zener Impedance @ $I_{ZK}$       |
| $I_R$    | Reverse Leakage Current @ $V_R$          |
| $V_R$    | Breakdown Voltage                        |
| $I_F$    | Forward Current                          |
| $V_F$    | Forward Voltage @ $I_F$                  |
| $I_R$    | Surge Current @ $T_A = 25^\circ\text{C}$ |

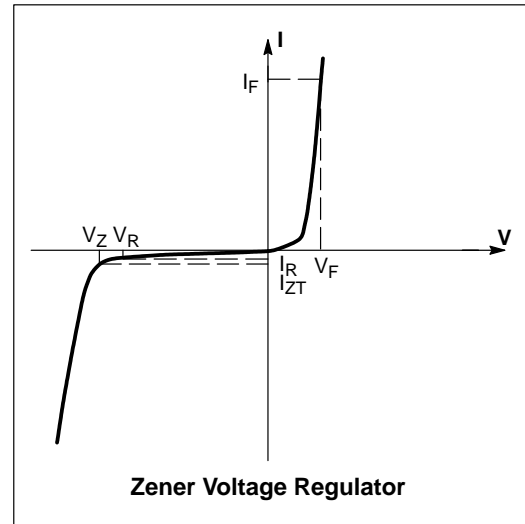

EEPW 电子产品世界 .com.cn

## BZX85C3V3RL Series

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted,  $V_F = 1.2\text{ V Max.}$ ,  $I_F = 200\text{ mA}$  for all types)

| Device<br>(Note 1) | Device<br>Marking | Zener Voltage (Notes 2 and 3) |       |      |            | Zener Impedance (Note 4) |                     |      | Leakage Current   |       | $I_R$<br>(Note 5)<br>mA |
|--------------------|-------------------|-------------------------------|-------|------|------------|--------------------------|---------------------|------|-------------------|-------|-------------------------|
|                    |                   | $V_Z$ (Volts)                 |       |      | @ $I_{ZT}$ | $Z_{ZT}$ @ $I_{ZT}$      | $Z_{ZK}$ @ $I_{ZK}$ |      | $I_R$ @ $V_R$     |       |                         |
|                    |                   | Min                           | Nom   | Max  | mA         | $\Omega$                 | $\Omega$            | mA   | $\mu\text{A Max}$ | Volts |                         |
| BZX85C3V3RL        | BZX85C3V3         | 3.1                           | 3.3   | 3.5  | 80         | 20                       | 400                 | 1    | 1                 | 60    | 1380                    |
| BZX85C3V6RL        | BZX85C3V6         | 3.4                           | 3.6   | 3.8  | 60         | 15                       | 500                 | 1    | 1                 | 30    | 1260                    |
| BZX85C3V9RL        | BZX85C3V9         | 3.7                           | 3.9   | 4.1  | 60         | 15                       | 500                 | 1    | 1                 | 5     | 1190                    |
| BZX85C4V3RL        | BZX85C4V3         | 4.0                           | 4.3   | 4.6  | 50         | 13                       | 500                 | 1    | 1                 | 3     | 1070                    |
| BZX85C4V7RL        | BZX85C4V7         | 4.4                           | 4.7   | 5.0  | 45         | 13                       | 600                 | 1    | 1.5               | 3     | 970                     |
| BZX85C5V1RL        | BZX85C5V1         | 4.8                           | 5.1   | 5.4  | 45         | 10                       | 500                 | 1    | 2                 | 1     | 890                     |
| BZX85C5V6RL        | BZX85C5V6         | 5.2                           | 5.6   | 6.0  | 45         | 7                        | 400                 | 1    | 2                 | 1     | 810                     |
| BZX85C6V2RL        | BZX85C6V2         | 5.8                           | 6.2   | 6.6  | 35         | 4                        | 300                 | 1    | 3                 | 1     | 730                     |
| BZX85C6V8RL        | BZX85C6V8         | 6.4                           | 6.8   | 7.2  | 35         | 3.5                      | 300                 | 1    | 4                 | 1     | 660                     |
| BZX85C7V5RL        | BZX85C7V5         | 7.0                           | 7.45  | 7.9  | 35         | 3                        | 200                 | 0.5  | 4.5               | 1     | 605                     |
| BZX85C8V2RL        | BZX85C8V2         | 7.7                           | 8.2   | 8.7  | 25         | 5                        | 200                 | 0.5  | 5                 | 1     | 550                     |
| BZX85C9V1RL        | BZX85C9V1         | 8.5                           | 9.05  | 9.6  | 25         | 5                        | 200                 | 0.5  | 6.5               | 1     | 500                     |
| BZX85C10RL         | BZX85C10          | 9.4                           | 10    | 10.6 | 25         | 7                        | 200                 | 0.5  | 7                 | 0.5   | 454                     |
| BZX85C12RL         | BZX85C12          | 11.4                          | 12.05 | 12.7 | 20         | 9                        | 350                 | 0.5  | 8.4               | 0.5   | 380                     |
| BZX85C13RL         | BZX85C13          | 12.4                          | 13.25 | 14.1 | 20         | 10                       | 400                 | 0.5  | 9.1               | 0.5   | 344                     |
| BZX85C15RL         | BZX85C15          | 13.8                          | 14.7  | 15.6 | 15         | 15                       | 500                 | 0.5  | 10.5              | 0.5   | 304                     |
| BZX85C16RL         | BZX85C16          | 15.3                          | 16.2  | 17.1 | 15         | 15                       | 500                 | 0.5  | 11                | 0.5   | 285                     |
| BZX85C18RL         | BZX85C18          | 16.8                          | 17.95 | 19.1 | 15         | 20                       | 500                 | 0.5  | 12.5              | 0.5   | 250                     |
| BZX85C22RL         | BZX85C22          | 20.8                          | 22.05 | 23.3 | 10         | 25                       | 600                 | 0.5  | 15.5              | 0.5   | 205                     |
| BZX85C24RL         | BZX85C24          | 22.8                          | 24.2  | 25.6 | 10         | 25                       | 600                 | 0.5  | 17                | 0.5   | 190                     |
| BZX85C27RL         | BZX85C27          | 25.1                          | 27    | 28.9 | 8          | 30                       | 750                 | 0.25 | 19                | 0.5   | 170                     |
| BZX85C30RL         | BZX85C30          | 28                            | 30    | 32   | 8          | 30                       | 1000                | 0.25 | 21                | 0.5   | 150                     |
| BZX85C33RL         | BZX85C33          | 31                            | 33    | 35   | 8          | 35                       | 1000                | 0.25 | 23                | 0.5   | 135                     |
| BZX85C36RL         | BZX85C36          | 34                            | 36    | 38   | 8          | 40                       | 1000                | 0.25 | 25                | 0.5   | 125                     |
| BZX85C43RL         | BZX85C43          | 40                            | 43    | 46   | 6          | 50                       | 1000                | 0.25 | 30                | 0.5   | 110                     |
| BZX85C47RL         | BZX85C47          | 44                            | 47    | 50   | 4          | 90                       | 1500                | 0.25 | 33                | 0.5   | 95                      |
| BZX85C62RL         | BZX85C62          | 58                            | 62    | 66   | 4          | 125                      | 2000                | 0.25 | 43                | 0.5   | 70                      |
| BZX85C75RL         | BZX85C75          | 70                            | 75    | 80   | 4          | 150                      | 2000                | 0.25 | 51                | 0.5   | 60                      |
| BZX85C82RL         | BZX85C82          | 77                            | 82    | 87   | 2.7        | 200                      | 3000                | 0.25 | 56                | 0.5   | 55                      |

**1. TOLERANCE AND TYPE NUMBER DESIGNATION**

The type numbers listed have zener voltage min/max limits as shown and have a standard tolerance on the nominal zener voltage of  $\pm 5\%$ .

**2. AVAILABILITY OF SPECIAL DIODES**

For detailed information on price, availability and delivery of nominal zener voltages between the voltages shown and tighter voltage tolerances, contact your nearest ON Semiconductor representative.

**3. ZENER VOLTAGE ( $V_Z$ ) MEASUREMENT**

$V_Z$  measured after the test current has been applied to  $40 \pm 10$  msec, while maintaining the lead temperature ( $T_L$ ) at  $30^\circ\text{C} \pm 1^\circ\text{C}$ , 3/8" from the diode body.

**4. ZENER IMPEDANCE ( $Z_Z$ ) DERIVATION**

The zener impedance is derived from 1 kHz cycle AC voltage, which results when an AC current having an rms value equal to 10% of the DC zener current ( $I_{ZT}$  or  $I_{ZK}$ ) is superimposed on  $I_{ZT}$  or  $I_{ZK}$ .

**5. SURGE CURRENT ( $I_R$ ) NON-REPETITIVE**

The rating listed in the electrical characteristics table is maximum peak, non-repetitive, reverse surge current of 1/2 square wave or equivalent sine wave pulse of 1/120 second duration superimposed on the test current,  $I_{ZT}$ . However, actual device capability is as described in Figure 5 of the General Data – DO-41 Glass.

## BZX85C3V3RL Series


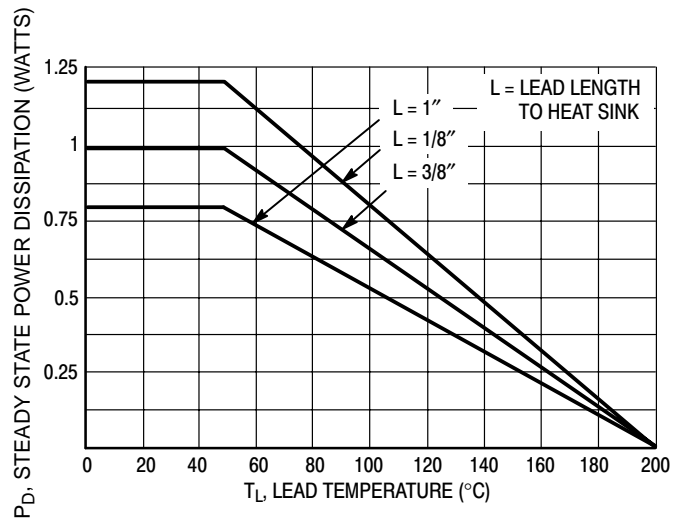


Figure 1. Power Temperature Derating Curve


EEPW 电子产品世界 .com.cn

# BZX85C3V3RL Series

a. Range for Units to 12 Volts

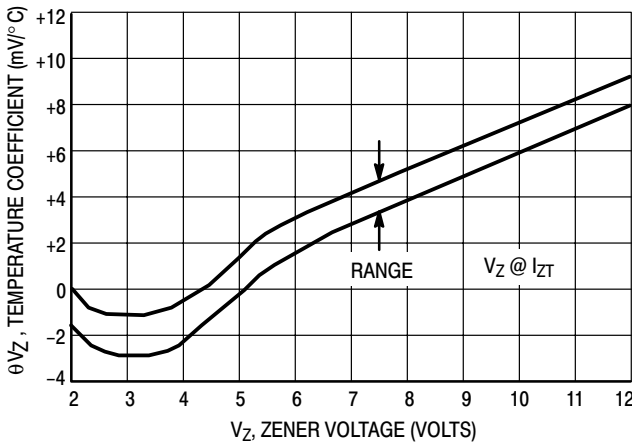


b. Range for Units to 12 to 100 Volts

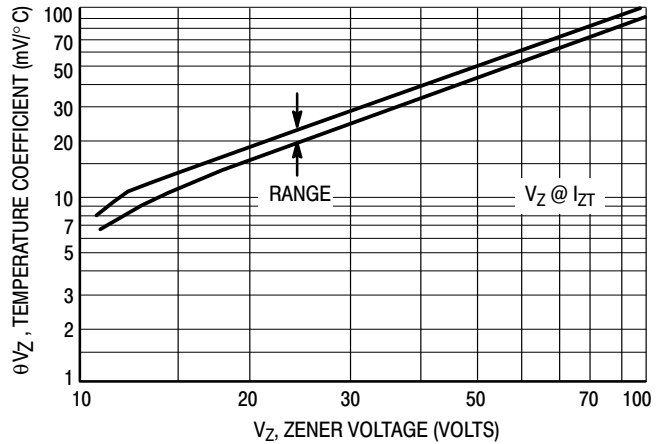


**Figure 2. Temperature Coefficients**


(-55°C to +150°C temperature range; 90% of the units are in the ranges indicated.)

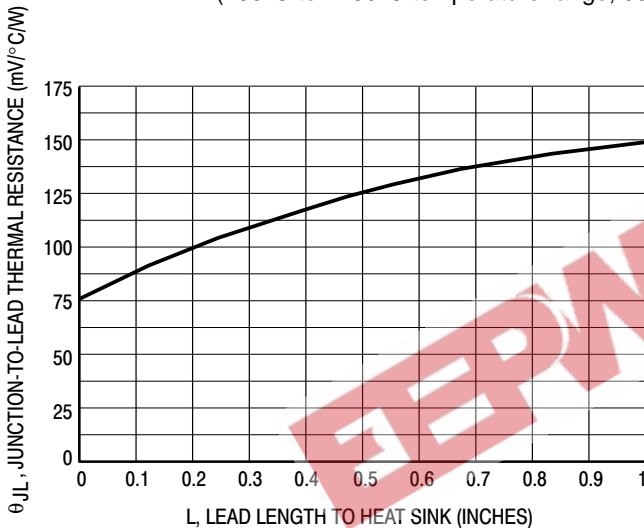

**Figure 3. Typical Thermal Resistance versus Lead Length**

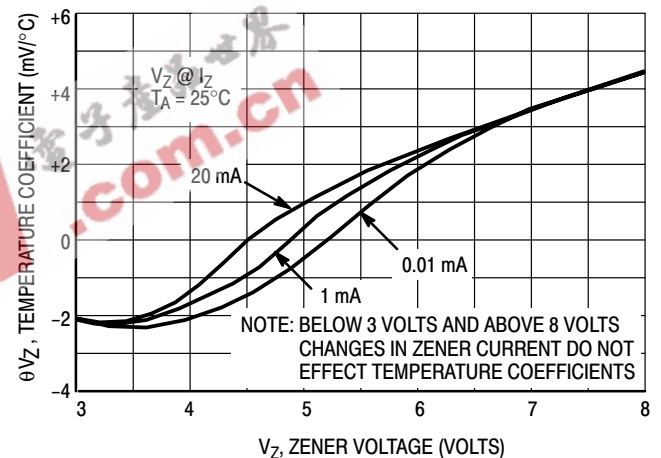


**Figure 4. Effect of Zener Current**

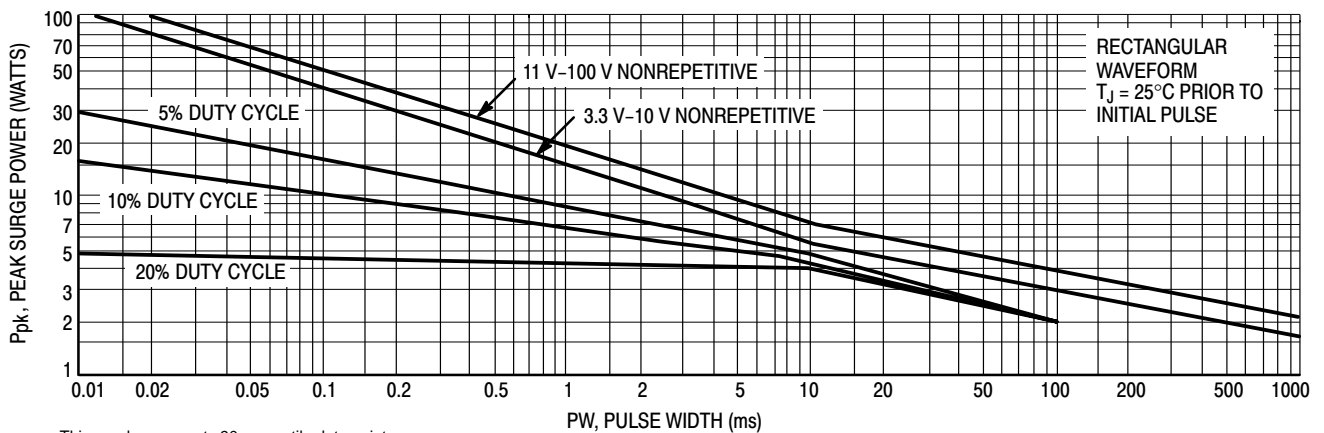


This graph represents 90 percentile data points.  
For worst case design characteristics, multiply surge power by 2/3.

**Figure 5. Maximum Surge Power**


## BZX85C3V3RL Series

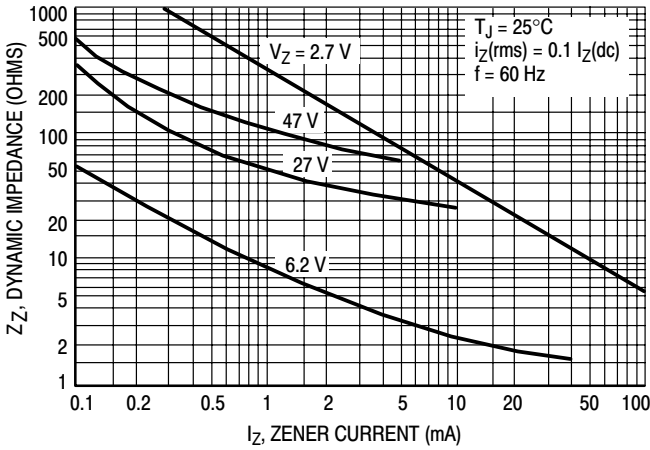


**Figure 6. Effect of Zener Current on Zener Impedance**

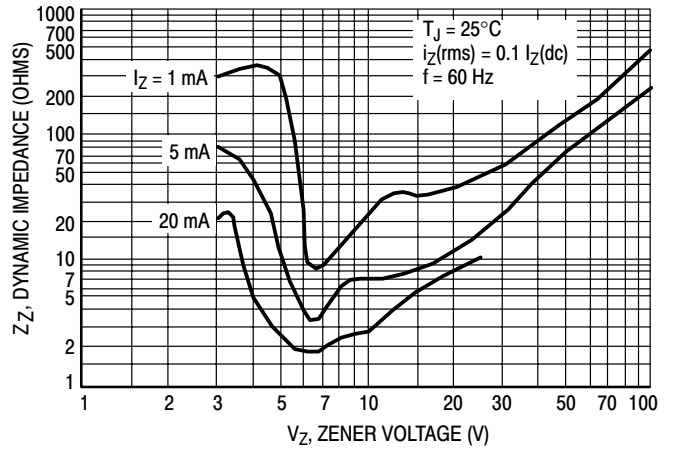


**Figure 7. Effect of Zener Voltage on Zener Impedance**

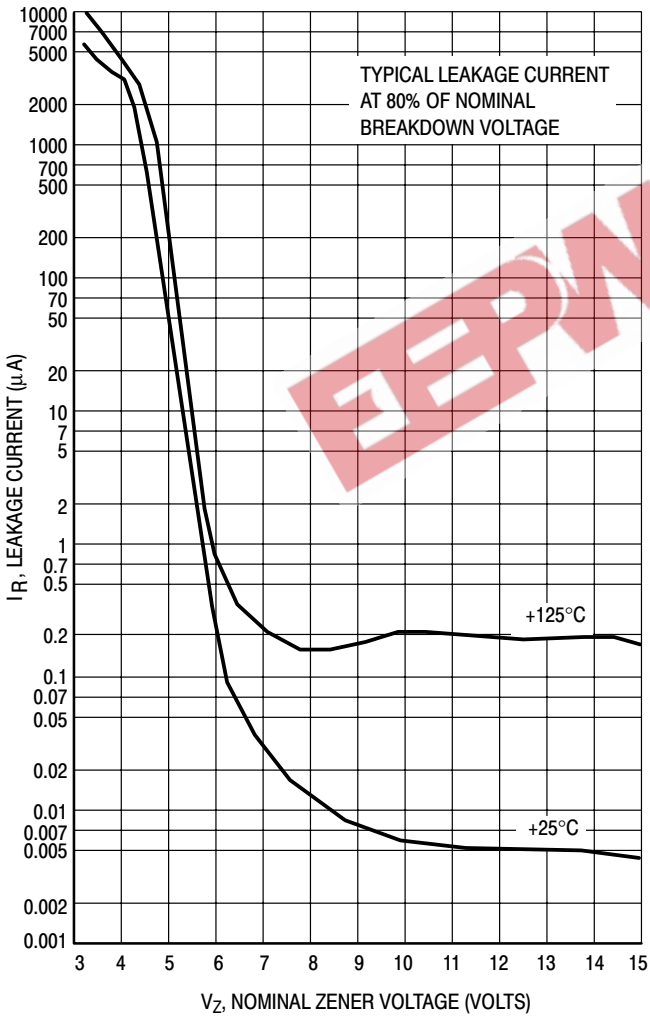

**Figure 8. Typical Leakage Current**

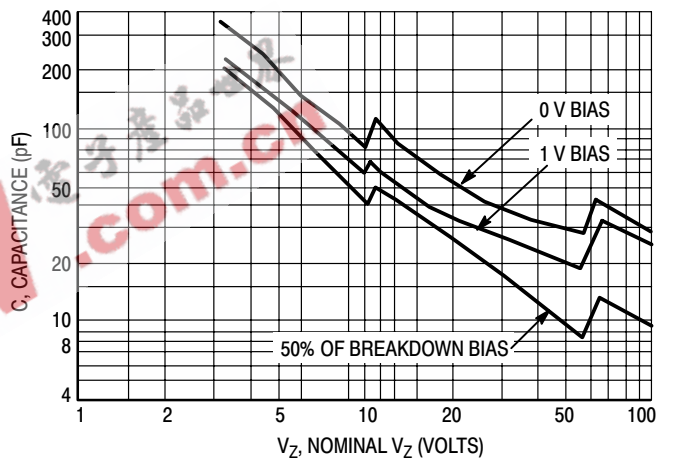

**Figure 9. Typical Capacitance versus  $V_Z$**

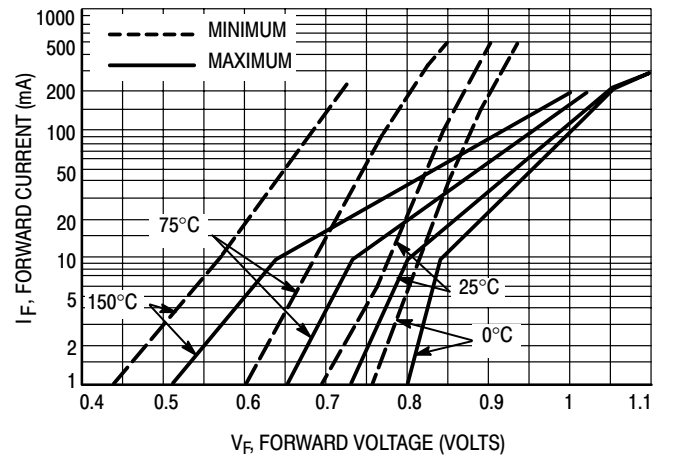

**Figure 10. Typical Forward Characteristics**

## BZX85C3V3RL Series

### APPLICATION NOTE

Since the actual voltage available from a given zener diode is temperature dependent, it is necessary to determine junction temperature under any set of operating conditions in order to calculate its value. The following procedure is recommended:

Lead Temperature,  $T_L$ , should be determined from:

$$T_L = \theta_{LA}P_D + T_A.$$

$\theta_{LA}$  is the lead-to-ambient thermal resistance ( $^{\circ}\text{C}/\text{W}$ ) and  $P_D$  is the power dissipation. The value for  $\theta_{LA}$  will vary and depends on the device mounting method.  $\theta_{LA}$  is generally 30 to  $40^{\circ}\text{C}/\text{W}$  for the various clips and tie points in common use and for printed circuit board wiring.

The temperature of the lead can also be measured using a thermocouple placed on the lead as close as possible to the tie point. The thermal mass connected to the tie point is normally large enough so that it will not significantly respond to heat surges generated in the diode as a result of pulsed operation once steady-state conditions are achieved. Using the measured value of  $T_L$ , the junction temperature may be determined by:

$\Delta T_{JL}$  is the increase in junction temperature above the lead temperature and may be found as follows:

$$T_J = T_L + \Delta T_{JL}.$$

$$\Delta T_{JL} = \theta_{JL}P_D.$$

$\theta_{JL}$  may be determined from Figure 3 for dc power conditions. For worst-case design, using expected limits of  $I_Z$ , limits of  $P_D$  and the extremes of  $T_J(\Delta T_J)$  may be estimated. Changes in voltage,  $V_Z$ , can then be found from:

$$\Delta V = \theta_{VZ}\Delta T_J.$$

$\theta_{VZ}$ , the zener voltage temperature coefficient, is found from Figure 2.

Under high power-pulse operation, the zener voltage will vary with time and may also be affected significantly by the zener resistance. For best regulation, keep current excursions as low as possible.

Surge limitations are given in Figure 5. They are lower than would be expected by considering only junction temperature, as current crowding effects cause temperatures to be extremely high in small spots, resulting in device degradation should the limits of Figure 5 be exceeded.

EEPW.com.cn  
电子產品世界


## BZX85C3V3RL Series

### OUTLINE DIMENSIONS

# Zener Voltage Regulators – Axial Leaded

## 1 Watt DO-41 Glass


GLASS DO-41  
CASE 59-10  
ISSUE R

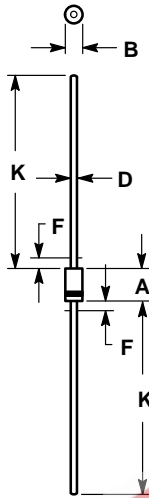

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. 59-04 OBSOLETE, NEW STANDARD 59-09.
4. 59-03 OBSOLETE, NEW STANDARD 59-10.
5. ALL RULES AND NOTES ASSOCIATED WITH JEDEC DO-41 OUTLINE SHALL APPLY.
6. POLARITY DENOTED BY CATHODE BAND.
7. LEAD DIAMETER NOT CONTROLLED WITHIN F DIMENSION.

| DIM | INCHES |       | MILLIMETERS |      |
|-----|--------|-------|-------------|------|
|     | MIN    | MAX   | MIN         | MAX  |
| A   | 0.161  | 0.205 | 4.10        | 5.20 |
| B   | 0.079  | 0.106 | 2.00        | 2.70 |
| D   | 0.028  | 0.034 | 0.71        | 0.86 |
| F   | ---    | 0.050 | ---         | 1.27 |
| K   | 1.000  | ---   | 25.40       | ---  |

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

### PUBLICATION ORDERING INFORMATION

**Literature Fulfillment:**

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** ONlit@hibbertco.com

**N. American Technical Support:** 800-282-9855 Toll Free USA/Canada

**JAPAN:** ON Semiconductor, Japan Customer Focus Center  
4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan 141-0031  
**Phone:** 81-3-5740-2700  
**Email:** r14525@onsemi.com

**ON Semiconductor Website:** <http://onsemi.com>

For additional information, please contact your local Sales Representative.