
Kingbright

1.75x3.9mm RECTANGULAR LED LAMP

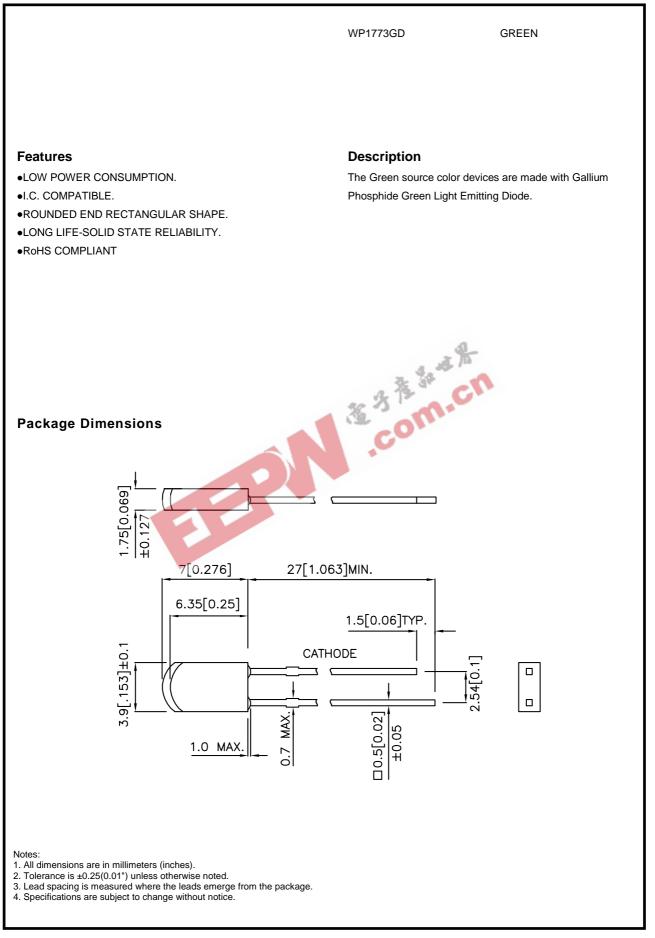

SPEC NO: DSAF2560 APPROVED: J. Lu REV NO: V.1 CHECKED: Allen Liu DATE: APR/19/2005 DRAWN: Y.W.WANG PAGE: 1 OF 3 ERP:1101003144-01

Kingbright

Selection Guid	le				
Part No.	Dice	Lens Type	lv (mcd) @ 10mA		Viewing Angle
			Min.	Тур.	201/2
WP1773GD	GREEN (GaP)	GREEN DIFFUSED	3	10	100°

Note:

1. θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD	Dominant Wavelength	Green	568	*	🦫 nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30	12	nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
Vf	Forward Voltage	Green	2.2	2.5	V	IF=20mA
IR	Reverse Current	Green	C	10	uA	VR = 5V



Absolute Maximum Ratings at TA=25°C

Parameter	Green			
Power dissipation	105	mW		
DC Forward Current	25	mA		
Peak Forward Current [1]	140	mA		
Reverse Voltage	5	V		
Operating / Storage Temperature	-40°C To +85°C			
Lead Solder Temperature [2]	260°C For 3 Seconds			
Lead Solder Temperature [3]	260°C For 5 Seconds			

Notes:


1. 1/10 Duty Cycle, 0.1ms Pulse Width.

2. 2mm below package base.

3. 5mm below package base.

DATE: APR/19/2005 DRAWN: Y.W.WANG

Kingbright

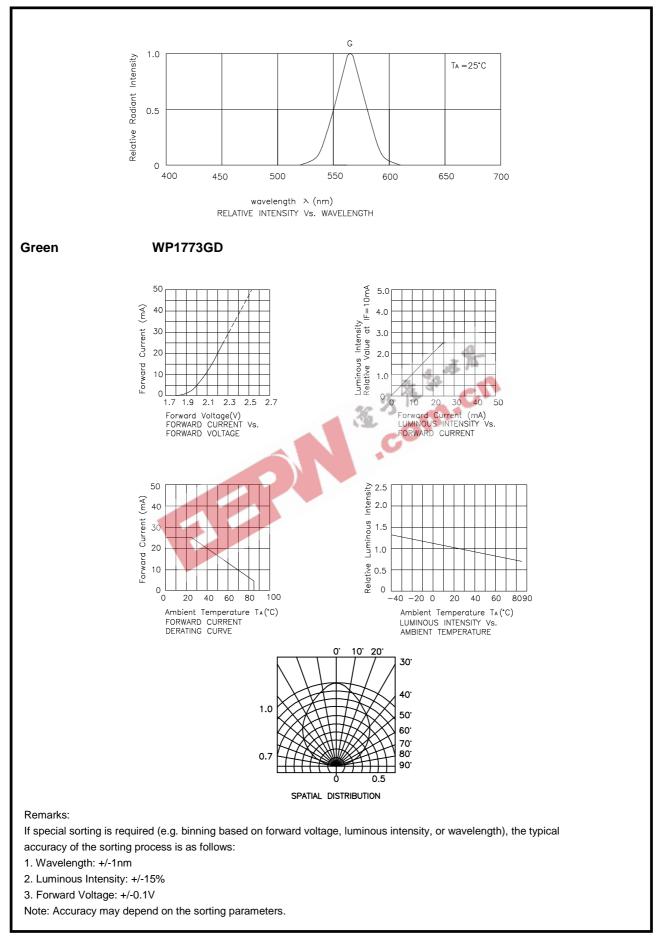

REV NO: V.1 CHECKED: Allen Liu DATE: APR/19/2005 DRAWN: Y.W.WANG PAGE: 3 OF 3 ERP:1101003144-01